

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	Even	2022.09.01


SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1-1. CURRENT RATING: 5.0A
- 1-2. VOLTAGE RATING: 20 V
- 1-3. LLCR: VBUS& GND PINS: 40mΩ/PIN MAX
OTHER PINS : 40mΩ/PIN MAX
LLCR MAX. CHANGE OF ALL PINS: 10mΩ
- 1-4. INSULATION RESISTANCE: 100MΩ MIN

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION FORCE: 0.5~2.0kg.
- 2-2. WITHDRAWAL FORCE: 0.8~2.0kg.(INITIAL) 0.6~2.0kg.(AFTER LIFE TEST)
- 3. DURABILITY: 10,000 CYCLES.
- 4. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- 5. HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
- 6. PACKAGE: SEE "2UB1692-C60211F" PACKAGE.
- 7. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- 8. HIGH FREQUENCY: Accord with USB 3.1 GEN2 (10/gbds)Specs
- 9. OTHER GENERAL SPEC. TO REFER "2UB1692-C60211F SPEC".

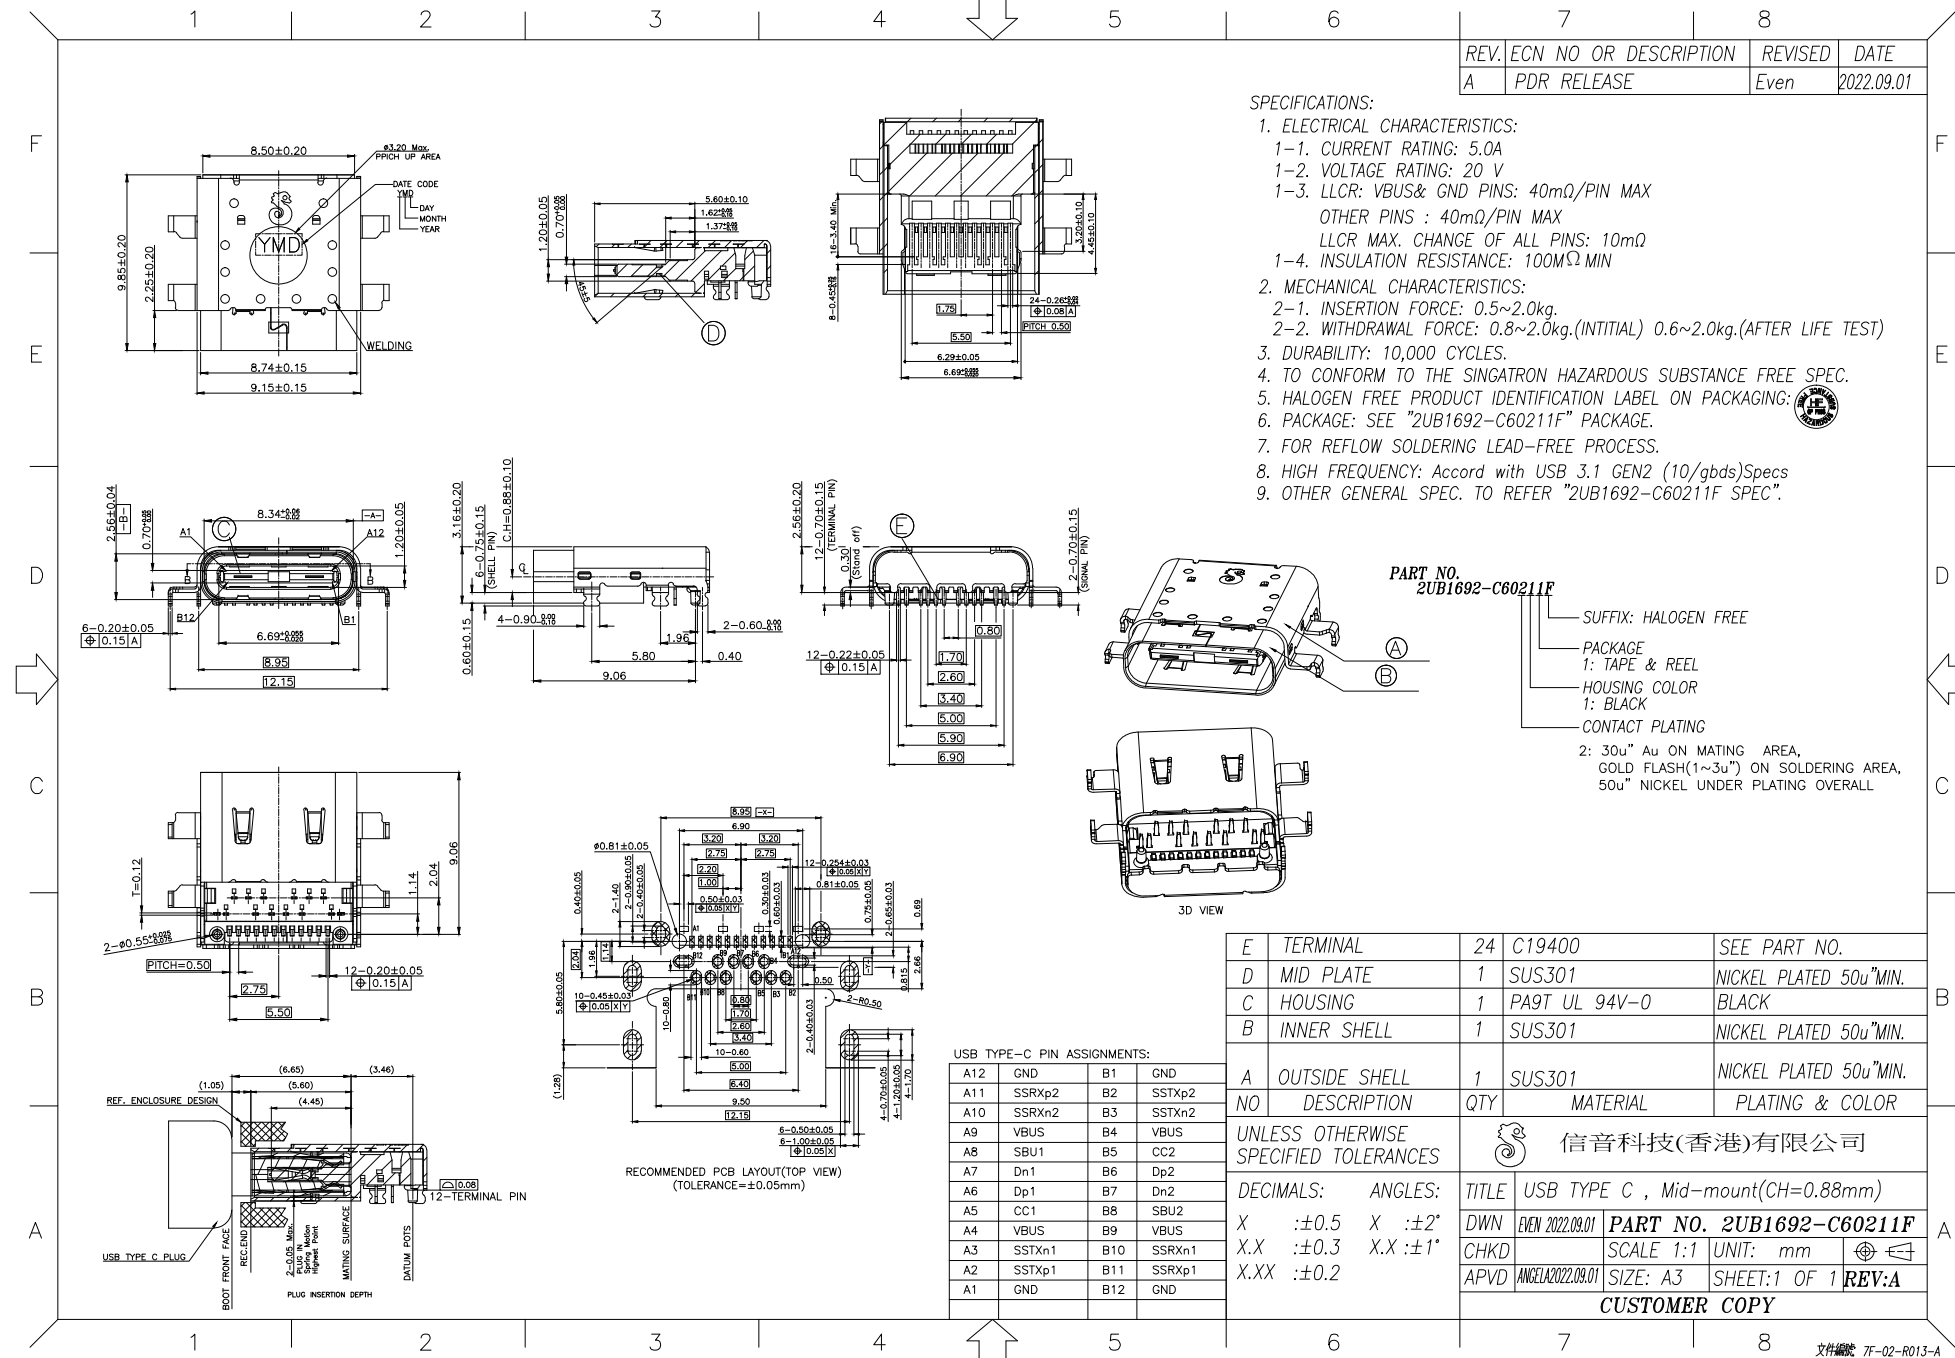

PART NO.
2UB1692-C60211F

- SUFFIX: HALOGEN FREE
- PACKAGE
- 1: TAPE & REEL
- HOUSING COLOR
- 1: BLACK
- CONTACT PLATING
- 2: 30u" Au ON MATING AREA,
GOLD FLASH(1~3u") ON SOLDERING AREA,
50u" NICKEL UNDER PLATING OVERALL

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
E	TERMINAL	24	C19400	SEE PART NO.
D	MID PLATE	1	SUS301	NICKEL PLATED 50u"MIN.
C	HOUSING	1	PA9T UL 94V-0	BLACK
B	INNER SHELL	1	SUS301	NICKEL PLATED 50u"MIN.
A	OUTSIDE SHELL	1	SUS301	NICKEL PLATED 50u"MIN.

USB TYPE-C PIN ASSIGNMENTS:

A12	GND	B1	GND
A11	SSRXp2	B2	SSTXp2
A10	SSRXn2	B3	SSTXn2
A9	VBUS	B4	VBUS
A8	SBU1	B5	CC2
A7	Dn1	B6	Dp2
A6	Dp1	B7	Dn2
A5	CC1	B8	SBU2
A4	VBUS	B9	VBUS
A3	SSTXn1	B10	SSRXn1
A2	SSTXp1	B11	SSRXp1
A1	GND	B12	GND

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:
X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2



信音科技(香港)有限公司

TITLE USB TYPE C , Mid-mount(CH=0.88mm)

DWN EVEN 2022.09.01 PART NO. 2UB1692-C60211F

CHKD SCALE 1:1 UNIT: mm

APVD ANGELA2022.09.01 SIZE: A3 SHEET:1 OF 1 REV:A

CUSTOMER COPY