
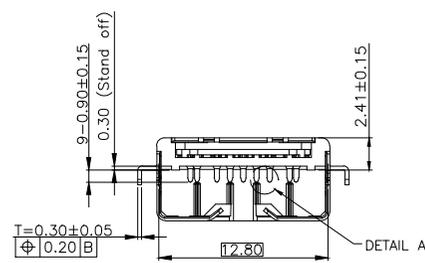
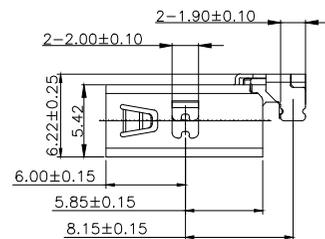
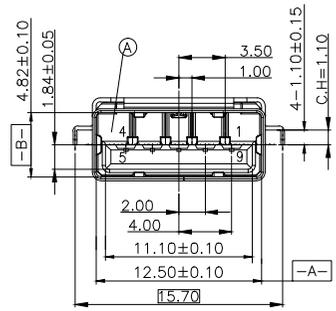
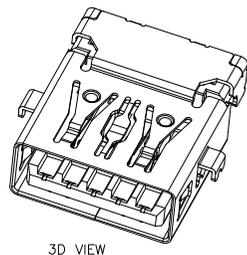
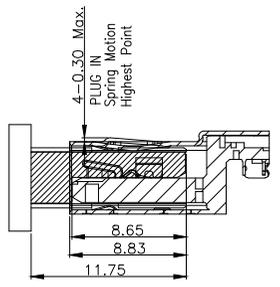





REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	EVEN	2022.11.11
B	ECN NO: L202212-C03	EVEN	2023.02.20

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 1.8A (PIN1,4) ; OTHER CONTACTS 0.25A
 - CONTACT RESISTANCE: 30mΩ MAX INITIAL FOR PIN1~4
50mΩ MAX INITIAL FOR OTHER PIN.
 - INSULATION RESISTANCE: 100MΩ MIN
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 2.5 Kgf Max.
 - WITHDRAWAL FORCE : 1.0~2.5 Kgf(INITIAL).
0.8~2.5 Kgf(AFTER TEST)
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING: 
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - PACKAGING : TAPE & REEL. SEE "2UB1833-000111F" PACKAGE.
 - OTHER GENERAL SPEC. TO REFER "2UB1833-000111F SPEC".
 - DURABILITY: 5,000 CYCLES

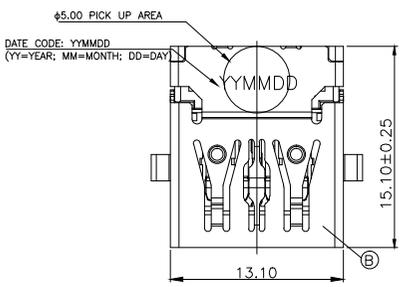

PART NO.
2UB1833-000111F

- SUFFIX: HALOGEN FREE PACKAGE
- 1: TAPE & REEL
- HOUSING COLOR: 1: BLACK
- CONTACT PLATING: 1: GOLD FLASH(1~3u") PLATING ON CONTACT AREA, MATTE Sn 80u"MIN. ON SOLDERING AREA, 50u" MIN. NICKEL UNDER PLATING OVERALL

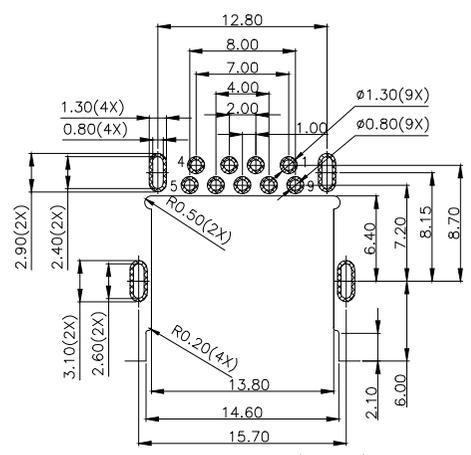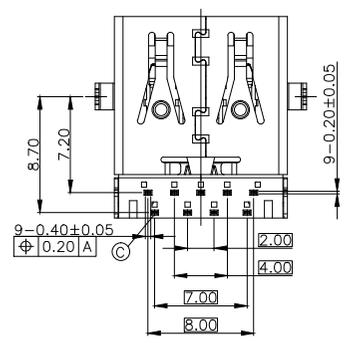

Pin Number	Signal ASSIGNMENT
PIN 1	VBUS
PIN 2	D-
PIN 3	D+
PIN 4	GND
PIN 5	StdA_SSRX-
PIN 6	StdA_SSRX+
PIN 7	GND_DRAIN
PIN 8	StdA_SSTX-
PIN 9	StdA_SSTX+

C	TERMINAL	9	C2680 T=0.20	SEE PART NO.
B	SHELL	1	SUS304-H T=0.30	NICKEL 50u"MIN
A	HOUSING	1	PA9T UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		 信音科技(香港)有限公司		
DECIMALS:		TITLE: USB 3.0 REVERSE CONNECTOR		
X.X : ±0.5		DWN: EVEN 2023.02.20		
X.XX : ±0.3		PART NO. 2UB1833-000111F		
X.XX : ±0.2		CHKD: SCALE 4:1 UNIT: mm		
		APVD: TERESA2023.02.20 SIZE: A3 SHEET: 1 OF 1 REV: B		
CUSTOMER COPY				