









REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	EVEN	2022.09.22
B	ECN NO: L202303-C07	EVEN	2023.04.28

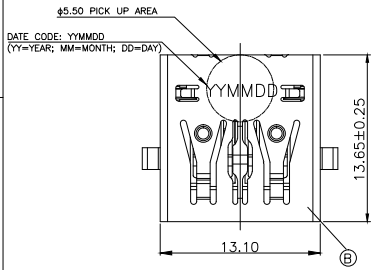

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
    - CURRENT RATING: 1.8A (PIN1,4)
    - CONTACT RESISTANCE: 30mΩ MAX INITIAL FOR PIN1~4
    - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR 1 MINUTE
  - INSULATION RESISTANCE: 100MΩ MIN
  - MECHANICAL CHARACTERISTICS:
    - INSERTION FORCE : 2.5 Kgf Max.
    - WITHDRAWAL FORCE : 1.0~2.5 Kgf(INITIAL).  
0.8~2.5 Kgf(AFTER TEST)
  - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
  - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
  - PACKAGING : TAPE & REEL. SEE "2UB1834-000111F" PACKAGE.
  - OTHER GENERAL SPEC. TO REFER "2UB1834-000111F SPEC".
  - DURABILITY: 5,000 CYCLES

**PART NO.**  
**2UB1834-000111F**

- SUFFIX: HALOGEN FREE PACKAGE
- 1: TAPE & REEL
- HOUSING & BASE COLOR
- 1: BLACK
- CONTACT PLATING
- 1: GOLD FLASH(1~3u") PLATING ON CONTACT AREA, MATTE Sn 80u"MIN. ON SOLDERING AREA, 50u" MIN. NICKEL UNDER PLATING OVERALL

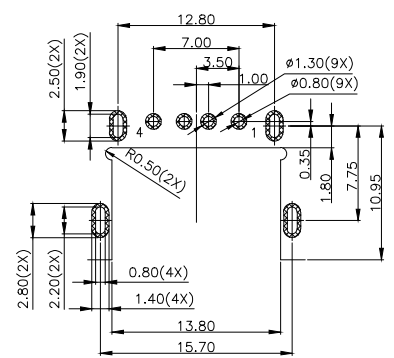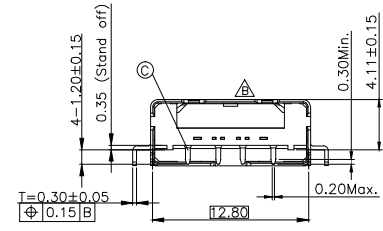

RECOMMENDED PCB LAYOUT(TOP VIEW)  
(DEFAULT DIMENSION TOL=±0.05mm)

Pin Number	Signal ASSIGNMENT
PIN 1	VBUS
PIN 2	D-
PIN 3	D+
PIN 4	GND
SHELL	SHIELD

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
C	TERMINAL	4	C5210-EH T=0.25mm	SEE PART NO.
B	SHELL	1	SUS201 T=0.30	NICKEL 50u"MIN
A	HOUSING	1	PA9T UL94-V0	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

信音科技(香港)有限公司

DECIMALS: ANGLES: TITLE: USB 2.0 REVERSE CONNECTOR

X :±0.5 X :±2° DWN: EVEN 2023.04.28 PART NO.2UB1834-000111F

X.X :±0.3 X.X :±1° CHKD: SCALE 4:1 UNIT: mm

X.XX :±0.2 APVD: VERESA 2023.04.28 SIZE: A3 SHEET: 1 OF 1 REV:B

CUSTOMER COPY