

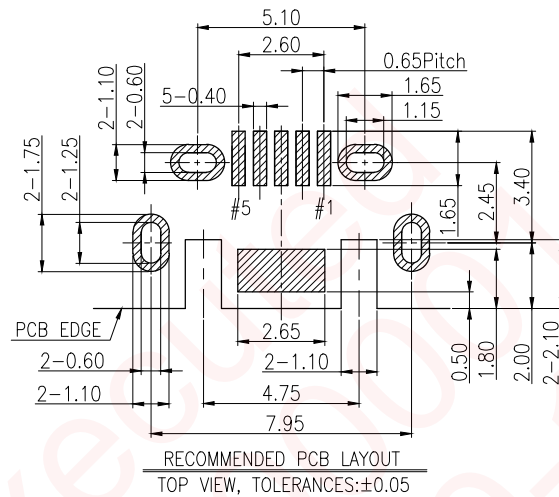
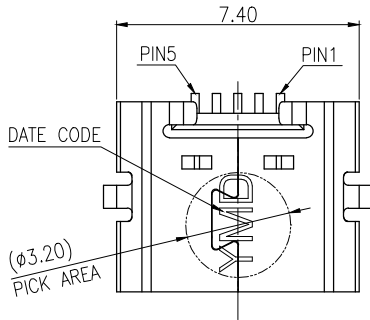

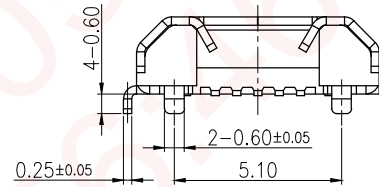


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	WZJ	2014.09.16
B	ECN NO:S150859-C	PENG	2015.09.01



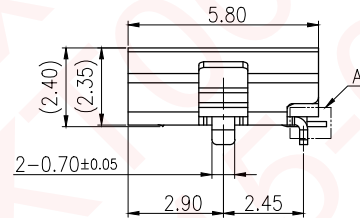


SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: 1.8A (PIN1/5), 0.5A (PIN2/3/4)
 - 1-2. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL) 40mΩ MAX.(FINAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
 - 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
- MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 3.6 KGF (MAX.)
 - 2-2. WITHDRAWAL FORCE : 0.8 KGF(reference)
- LIFE TEST: 10,000 CYCLES.
- TO CONFORM TO THE SINGATRON HSF SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- SOLDER HEAT RESISTANCE REFLOW SOLDERING 260°C 10SECS.
- PLUG INTERFACE DIMENSIONS COMFORM TO USB2.0 SPEC.
- PACKAGING: TAPE & REEL.

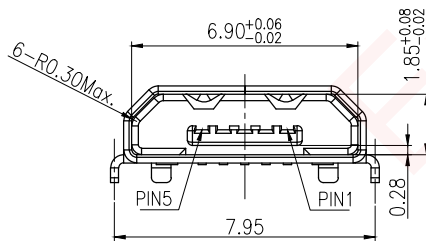

RECOMMEND MATING PLUG

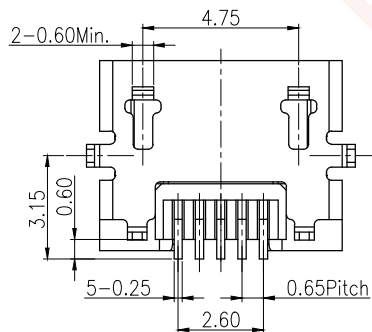

C	SHELL	1	STAINLESS STEEL 0.25T	NICKEL(WELDABLE)
B	CONTACT	5	COPPER ALLOY 0.15T	30u" Au ON CONTACT AREA GOLD FLASH ON SOLDER AREA
A	HOUSING	1	LCP+30%GF,UL94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS: ANGLES:		TITLE MICRO USB B TYPE REVERSE RECEPTACLE		
X	:±0.5 X :±2°	DWN	peng	PART NO.: 2UB2158-000111F
X.X	:±0.3 X.X :±1°	CHKD	cerry	SCALE 4:1 UNIT: mm
X.XX	:±0.2	APVD	liao	SIZE: A3 SHEET:1 OF 1 REV: B
CUSTOMER COPY				