
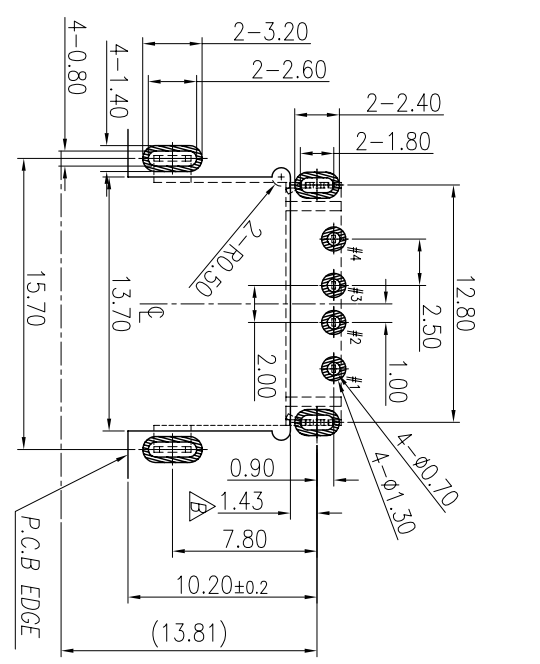
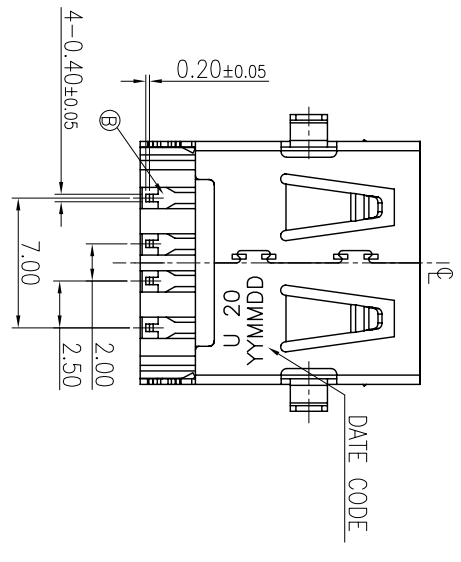
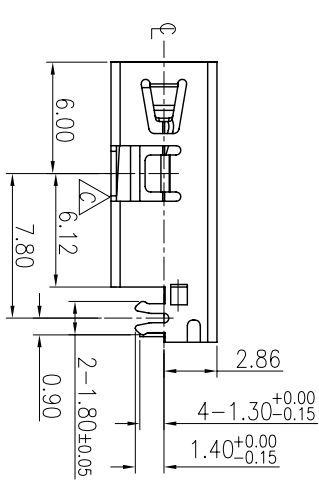
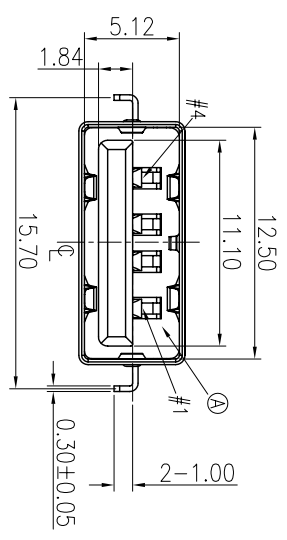


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	Longjiang	2014.12.10
B	ECN:C160044 MODIFY DRAWING	Longjiang	2014.12.10
C	ECN:C180024 UPDATE DRAWING	Heng	2018.03.30

**SPECIFICATIONS:**

- ELECTRICAL CHARACTERISTICS:
  - CURRENT RATING: 2.0A (PIN1,4) ; OTHER CONTACTS 0.25A
  - CURRENT RATING: 2.0A (PIN1,4) ; OTHER CONTACTS 0.25A
  - CONTACT RESISTANCE: 30mΩ MAX.
  - INSULATION RESISTANCE: 100 MEGAΩHMS MIN. BY 500V DC.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS:
  - INSERTION FORCE : 3.5 KGF MAX.
  - WITHDRAWAL FORCE : 1.0 KGF MIN.
- LIFE TEST: 5,000 CYCLES
- OTHER GENERAL SPEC. TO REFER "2UB2Y08 SERIES SPEC"
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT: ©
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING: ©
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- PACKAGE: TAPE & REEL

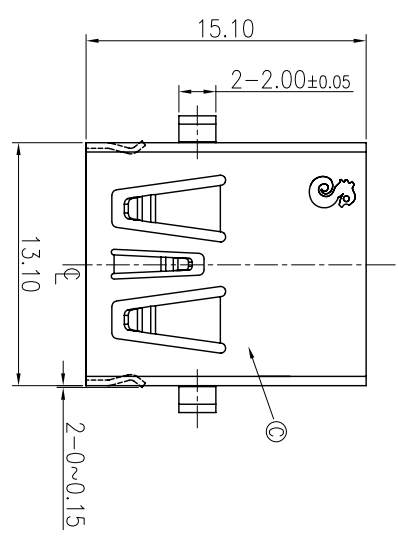

C	SHELL	1	STAINLESS STEEL	NICKEL PLATING
B	TERMINAL	4	COPPER ALLOY	GOLD FLASH ON CONTACT AREA AND WHITE FIN ON SOLDER TAIL, ALL OVER NICKEL PLATING
A	HOUSING	1	HIGH TEMP. THERMOPLASTIC UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.  
信登企業股份有限公司

DECIMALS:	ANGLES:	TITLE
X : ±0.5	X : ±2°	USB2.0 DIP A TYPE FEMALE, PH=0.00mm
X.X : ±0.3	X.X : ±1°	PART NO. 2UB2Y08-001111F
X.XX : ±0.2		SCALE N/A UNIT: mm

APVD 18/04/02 18/04/02

CUSTOMER COPY

