REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCTED RELEASE	ROBIN	10/12'10

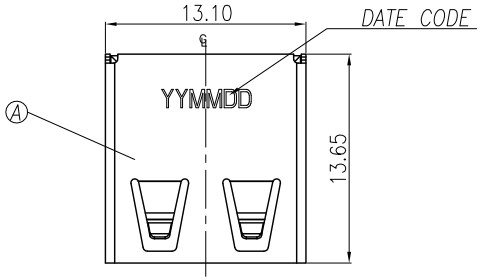

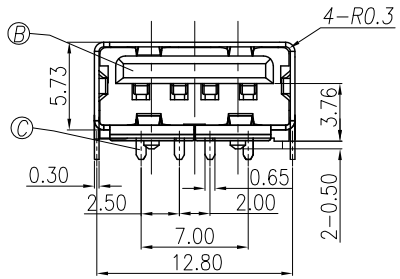

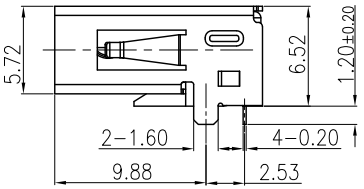

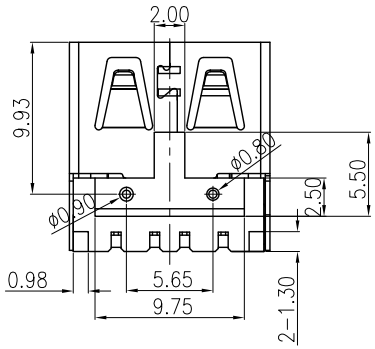

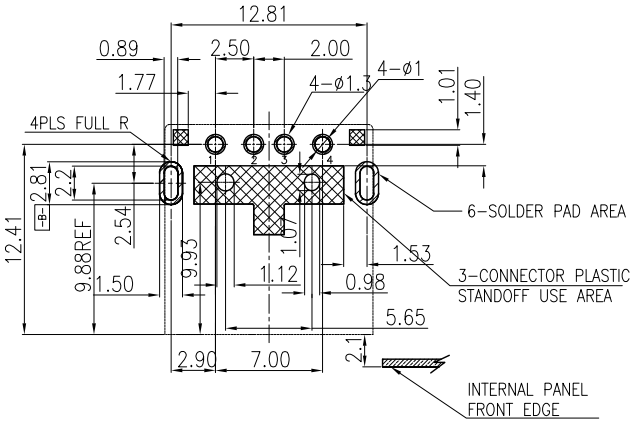

RECOMMENDED P.C.B. LAYOUT T=1.20
TOP VIEW (TOLRANCE: ±0.05)

SPECIFICATION

1. ELECTRICAL CHARACTERISTICS:
   - 1-1. VOLTAGE&CURRENT RATING:DC 30V MAX&1.5A
   - 1-2. CONTACT RESISTANCE: 30mΩ MAX.
   - 1-3. INSULATION RESISTANCE: 1000MΩ MIN.
   - 1-4. DIELECTRIC WITHSTAND: 500V AC for 1 MINUTE
   - 1-5. OPERATING TEMPERATURE: -55°C~+85°C
2. MECHANICAL CHARACTERISTICS:
   - 2-1. INSERT FORCE: 35N MAX.
   - 2-2. WITHDRAW FORCE: 8N MIN.
3. LIFE TEST: 5000 CYCLES
4. OTHER GENERAL SPEC. TO REFER "2UB2Y** SERIES SPEC"
5. PACKING: TAPE & REEL
6. HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
7. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
8. PRODUCT NO:

2UB2Y19-0 * * 1 1 1

- HOUSING MATERIAL: 0=HIGH TEMP PLASTIC
- CONTACT PLATING: 00=G/F
- PACKAGE TYPE: 1=TAPE&REEL
- REAR SHELL TYPE: 1=W/O REAR SHELL
- DURABILITY: 1=5000 CYCLES

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
C	CONTACT	4	COPPER ALLOY	GOLD PLATING AT CONTACT AREA TIN AT TERMINATION OVER NICKEL OVERALL
B	HOUSING	1	HIGH TEMP,THERMOPLASTIC	BLACK
A	SHELL	1	STEEL	NICKEL PLATING

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS: X :±0.5, X.X :±0.3, X.XX :±0.2
ANGLES: X :±2°, X.X :±1°

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

TITLE	USB A/FEMALE 90°(T字型)			
DWN	ROBIN	PART NO.: 2UB2Y19-000111		
CHKD		SCALE 3:1	UNIT: mm	
APVD	SEAN	SIZE: A3	SHEET: 10F1	REV: A

CUSTOMER COPY

文件編號 RD-06-043-A