


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	Longjiang	2017/06/22

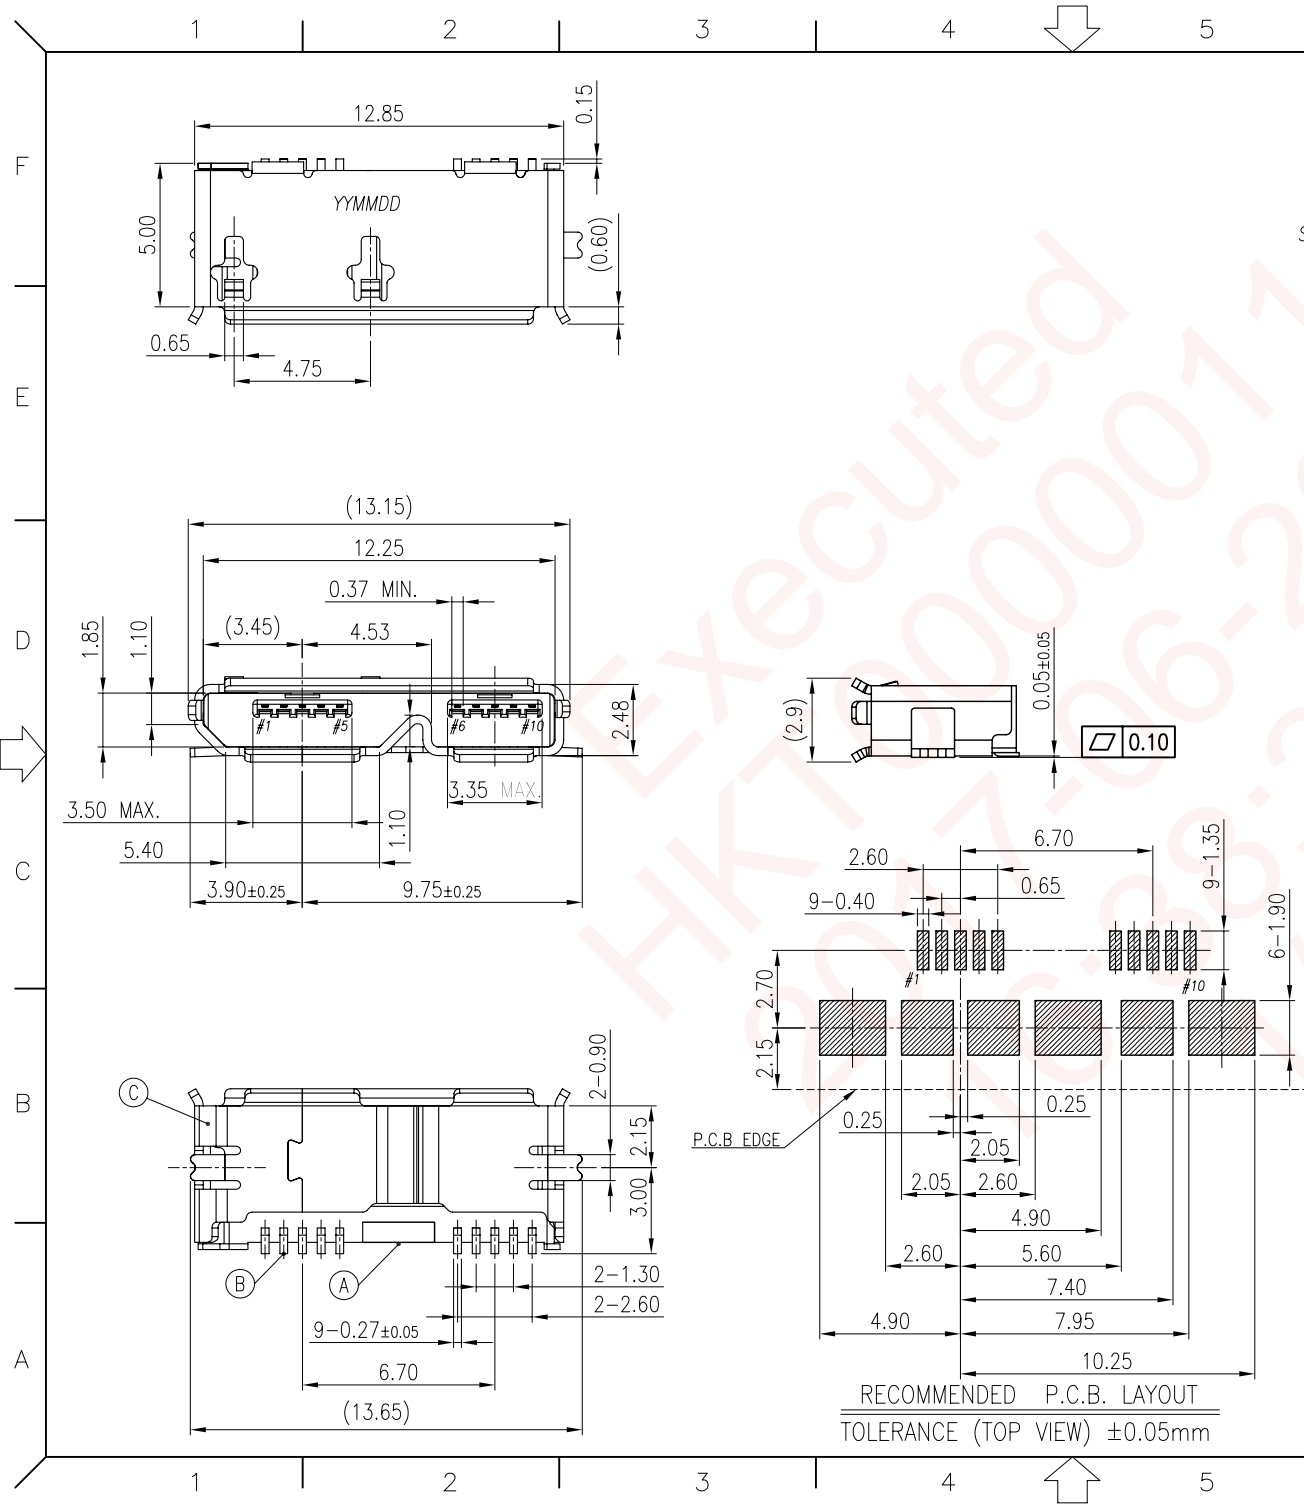

- SPECIFICATIONS:**
- ELECTRICAL CHARACTERISTICS:**
 - CURRENT RATING: 1.8A (PIN 1 & PIN 5), THE OTHER CONTACT 0.25A MIN.
 - CONTACT RESISTANCE: 50mΩ MAX. INITIAL.
 - INSULATION RESISTANCE: 100MΩ MIN. BY 500V DC .
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
 - MECHANICAL CHARACTERISTICS:**
 - INSERTION FORCE: 35N MAX.
 - WITHDRAWAL FORCE: 8N MIN.(REF)
 - LIFE TEST: 10,000 CYCLES.
 - OTHER GENERAL SPEC. TO REFER "2UB2Y95-300111F SPEC".
 - TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:
 - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - PACKAGING: TAPE & REEL.

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
C	SHELL	1	STAINLESS STEEL	NICKEL PLATING
B	CONTACT	10	BRASS	GOLD FLASH ON CONTACT AREA MATTE TIN ON SOLDER TAIL ALL OVER NICKEL PLATING
A	HOUSING	1	HIGH TEMP. THERMOPLASTIC UL 94V-0	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2°

X.X :±0.3 X.X :±1°

X.XX :±0.2

TITLE	MICRO USB 3.0 CONNECTOR		
DWN	Longjing-Cao	PART NO. 2UB2Y95-300111F	
CHKD	Juifu-Kuo	SCALE :1	UNIT: mm
APVD	Max-Mai	SIZE: A3	SHEET: 1 OF 1 REV: A

CUSTOMER COPY

副理

研發部(CS)

周吉洲

2017/06/23

13:33:21