



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.T141225-1A	Yang	2015.04.20




RECOMMENDED
PANEL CUT-OUT

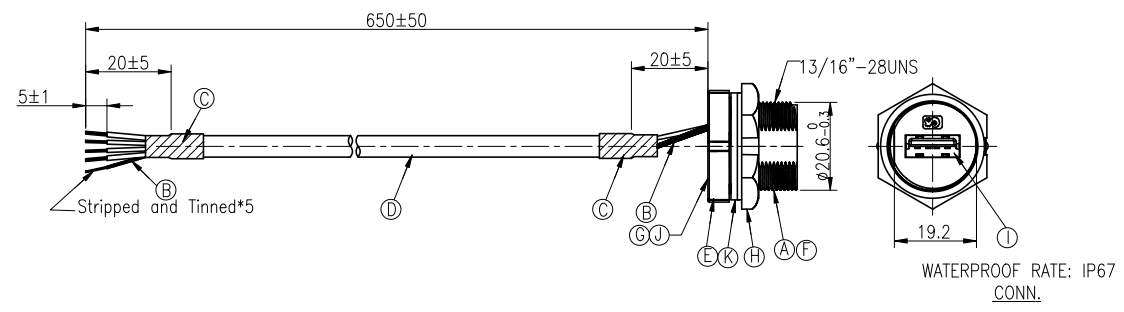

WATERPROOF RATE: IP67
CONN.

DRAIN	SHIELD
BLACK(24AWG)	4
GREEN(28AWG)	3
WHITE (28AWG)	2
RED (24AWG)	1
WIRE COLOR	CONN.1



- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. RATING: 30V 1A
 3. SPECIFICATIONS:SEE "USB SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**
 6. FOR PANEL THICKNESS MAX:3.5mm

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
k	GASKET	1	EPDM	BLACK
J	UV GLUE	1	N/A	NATURAL
I	USB A JACK	1	P/N:2UB1518-000111	N/A
H	SCREW NUT	1	PPE	BLACK
G	O-RING	1	EPDM	BLACK
F	PCB	1	FR-4	GREEN
E	SEALING NUT	1	PPE	BLACK
D	CABLE	1	USB2.0 28#*1P+24#*2C+ADB,UV Resistant	BLACK (PVC JACKET)
C	HEAT SHRINK TUBE	2	125C° 300V	BLACK
B	HEAT SHRINK TUBE	2	125C° 300V	BLACK
A	HOUSING	1	PPE	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司	
DECIMALS:	ANGLES:	TITLE WATERPROOF USB2.0 JACK+CABLE	
X :±0.5	X :±2°	DWN	Yang
X.X :±0.3	X.X :±1°	CHKD	JF
X.XX :±0.2		APVD	Harlen
		SCALE	1:1
		UNIT:	mm
		SIZE:	A3
		SHEET:	1 OF 1
		REV:	A

CUSTOMER COPY