



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A220706-3A	JAY	2023.02.10	
B	ECN NO.:S202309-E09	JAY	2023.11.07	
C	ECN NO.:S202305-C10	EIrod	2023.11.20	

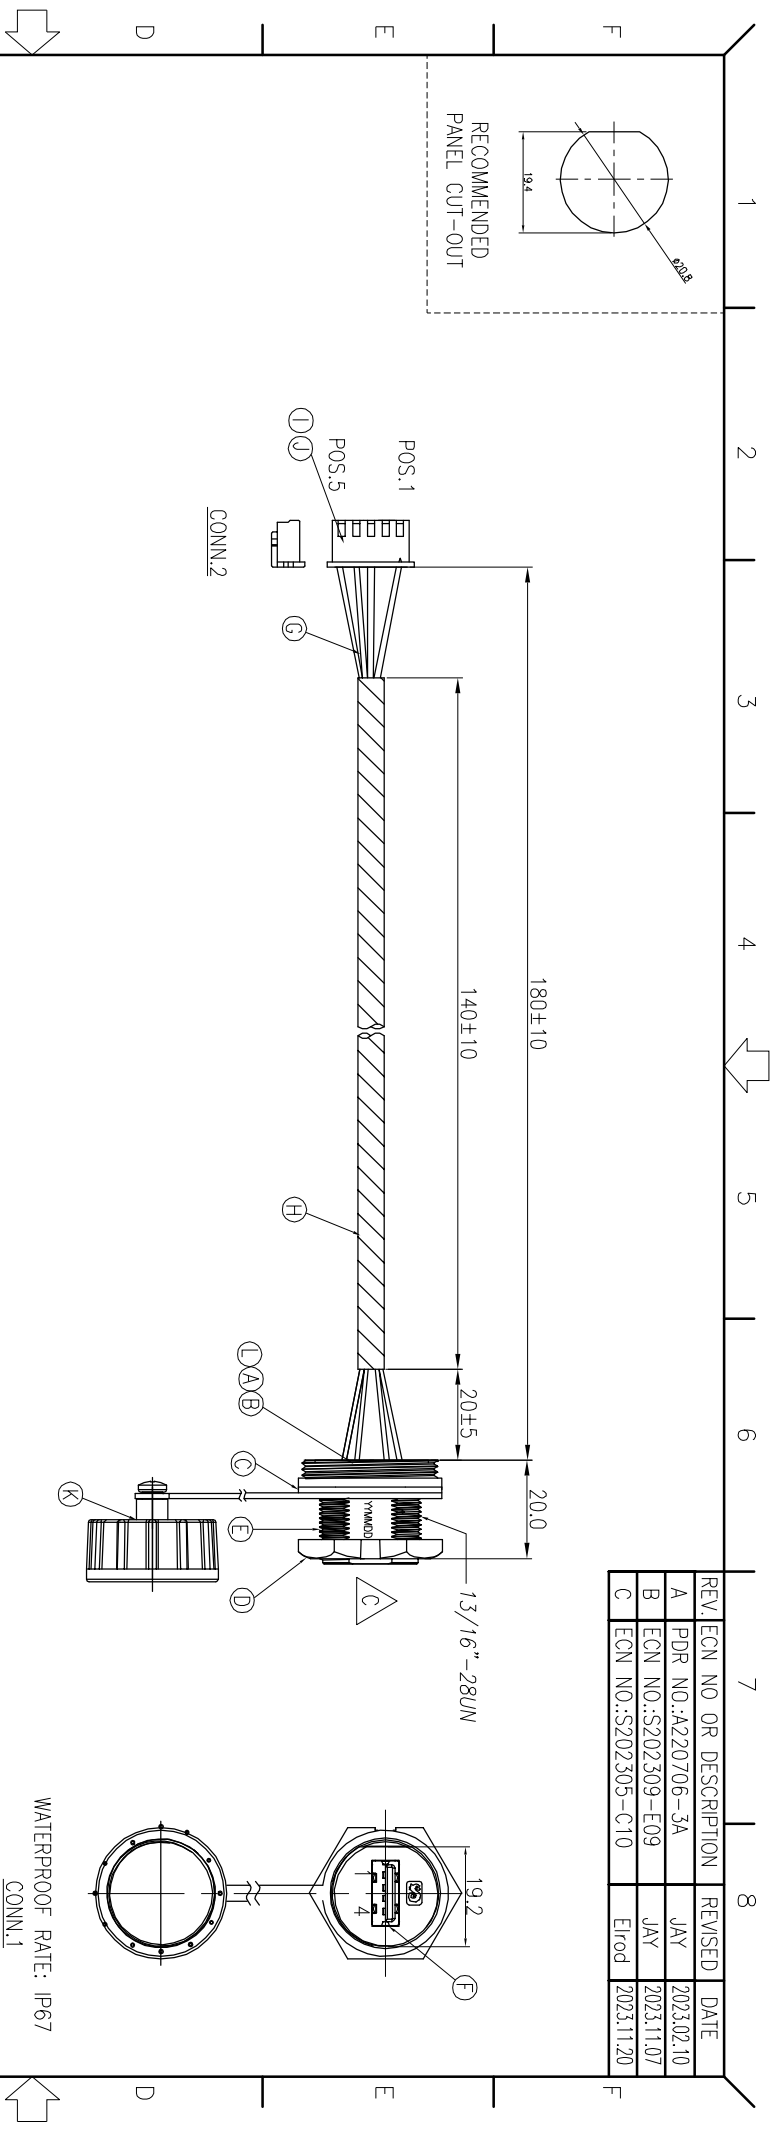

CONN.2		CONN.1	
5	GREEN(24AWG)	4	
4	WHITE (24AWG)	3	
3	BLACK(24AWG)	2	
1	RED (24AWG)	1	
WIRE COLOR		CONN.1	
PIN DEFINE			

- NOTES:
1. WATERPROOF DEGREE OF PROTECTION: IP67(WHEN PROPERLY MATED) IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 2. RATING: 30V 1A
 3. SPECIFICATIONS:SEE "USB SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGAITRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 6. FOR PANEL THICKNESS: Max.:4.0mm
 7. TEMPERATURE RANGE: -20~80℃
 8. TIGHTENING TORQUES: 0.8~1.0Nm(7.08~8.85lbf.in.).
 9. LASE DATE CODE "YYMMDD" ON TOP OF CONN.

J	TERMANL	4	PHOSPHOR BRONZE	GOLD-FLASH
I	HOUSING	1	NYLON 66 UL 94V-0	WHITE
H	HEAT SHRINK TUBE	1	125°C 300V	BLACK
G	WIRE	4	UL1007 24AWG	SEE PIN OUT
F	USB A JACK	1	UL94V-0	N/A
E	HOUSING	1	PC UL94V-0	BLACK
D	SCREW NUT	1	NYLON66 UL94-HB	BLACK
C	GASKET	1	EPDM	BLACK
B	GLUE	1	JAY73A+B	BLACK
A	PCB	1	FR-4 UL94V-0	GREEN
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

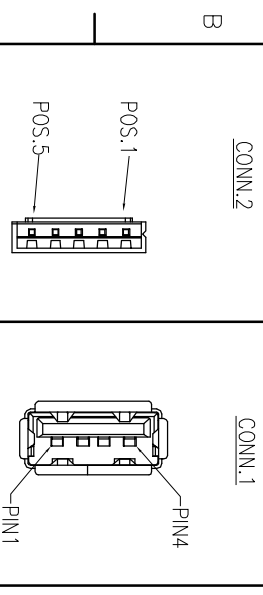

- DATE CODE: YYMMDD
- DAY
 - MONTH
 - YEAR

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

A		B		C		D		E		F	
Pin Assignments Front View		Pin Assignments Front View		L	UV GLUE	1		K	WATERPROOF CAP	1	
										NATURAL	
										N/A	

WATERPROOF RATE: IP67
CONN.1

CUSTOMER COPY