

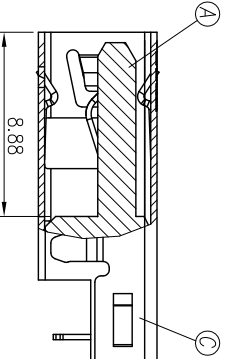
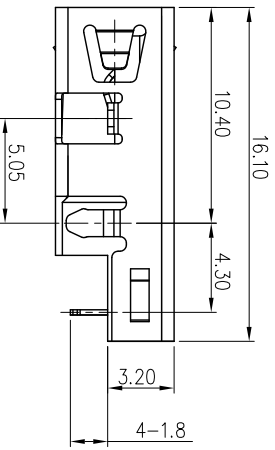
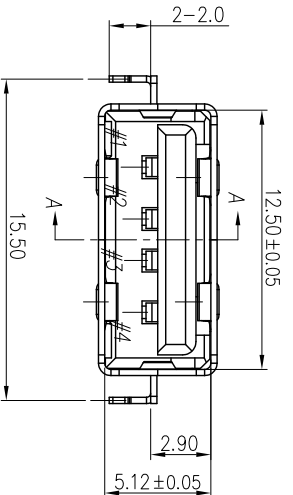
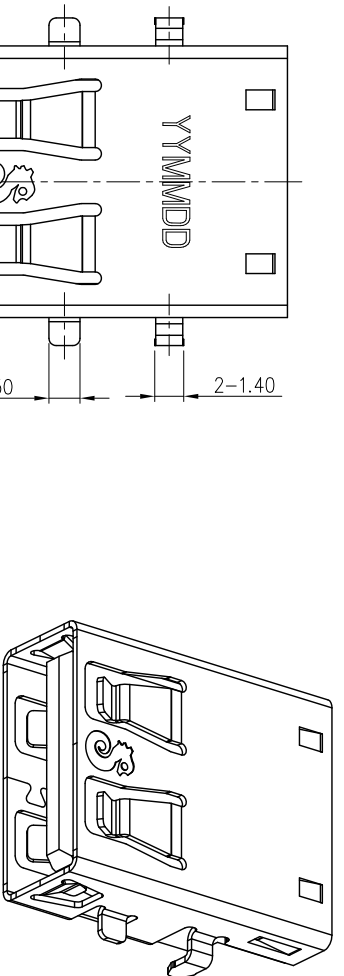


REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO: TT30124-5A		Edi.Zhou	2013.11.18
B	ECN NO: S140825		SEAN	2014.10.23

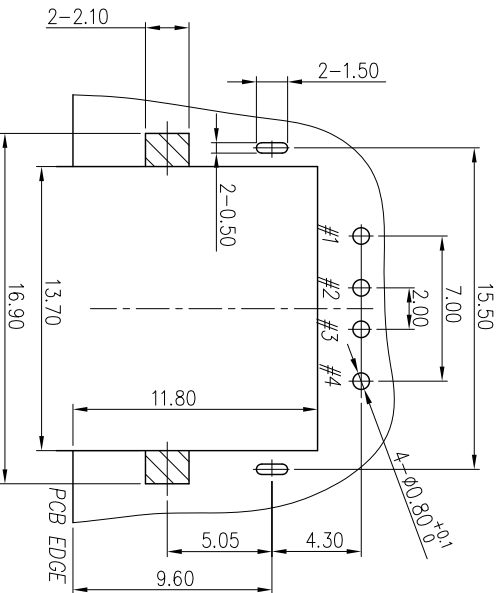

- SPECIFICATIONS:**
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30mΩ MAX.(INITIAL) AFTER LIFE TEST 50mΩ.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC.
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 3.5 KG Max.
 - WITHDRAWAL FORCE : 1.0~3.5 kgf(INITIAL), 0.8~3.5kgf(AFTER TEST)
 - LIFE TEST: 5,000 CYCLES.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK:
 - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - PRINTED DATE CODE "YYMMDD" ON TOP OF CONNECTOR.

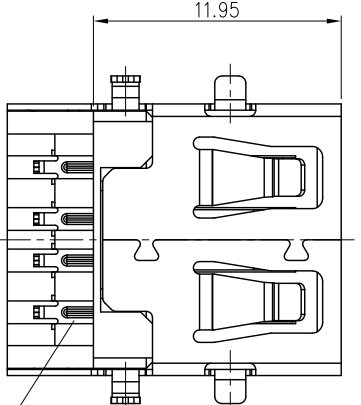

SECTION A-A

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
C	SHELL	1	S50C 0.30T	Ni: 60u"
B	SPRING	4	COPPER ALLOY 0.25T	Au 10u" ON CONTACT AREA; Sn 120u" ON SOLDER TAIL; ALL OVER Ni: 50u"
A	BODY	1	HIGH TEMP. THERMOPLASTICUL 94V-0	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES



TITLE: USB 4P

DECIMALS:	ANGLES:	DRAWN	SEAN	PART NO.	2UB3405-003111F
X : ±0.5	X : ±2°	CHKD	CERRY	SCALE	4:1
X.X : ±0.3	X.X : ±1°	APVD	LIAO	SIZE	A3
X.XX : ±0.2				SHEET	1 OF 1

RECOMMEND P.C.B LAYOUT TOP VIEW(TOLERANCES ±0.05)

CUSTOMER COPY