
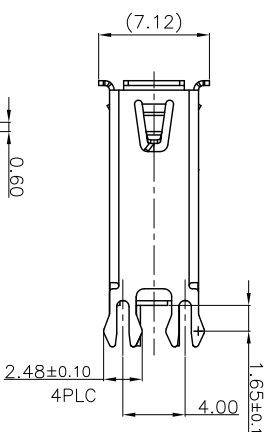
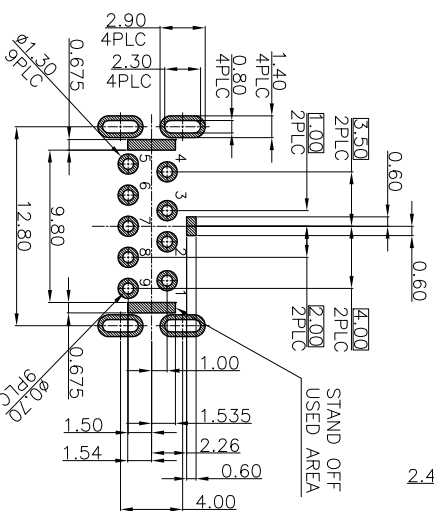



-

Pin Number	Signal ASSIGNMENT

[illegible][illegible]

Recommended P.C.B Layout(Top View THK:1.57mm)
TOLERANCE=±0.05

E	SHELL	1	STAINLESS STEEL, T=0.30	NICKEL 60u "MIN
D	5 PIN TERMINAL	5	BARSS, T=0.25	4u 2uin OVER 30uin PA PLATED ON CONTACT AREA: Mat. 5u 120uin PLATED ON SOLDERING ALL OVER 80uin NICKEL PLATING.
C	4 PIN TERMINAL	4	COPPER ALLOY, T=0.25	
B	BASE	1	PA 9T UL94V-V0	BLACK
A	BODY	1	PA 9T UL94V-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
 Singapore Enterprise Co., Ltd. 信音企業股份有限公司				
DECIMALS:	ANGLES:	TITLE USB 3.0 CONNECTOR		
X : ±0.5	X : ±2°	DWN	SEAN	PART NO: 2UB3903-019101F
X.X : ±0.3	X.X : ±1°	CHKD	Cerry	SCALE: 4:1 UNIT: mm
X.XX : ±0.2		APVD	LUSSEN	SIZE: A3 SHEET: 1 OF 1
REV: B				
CUSTOMER COPY				

USB 3.0 CONNECTOR	
PART NO.:2UB3903-0	
SCALE:4:1	UNIT: mm
SIZE: A3	SHEET:1 OF

CUSTOMER COPY