



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO: S180519-8A	Allen	2017.05.15

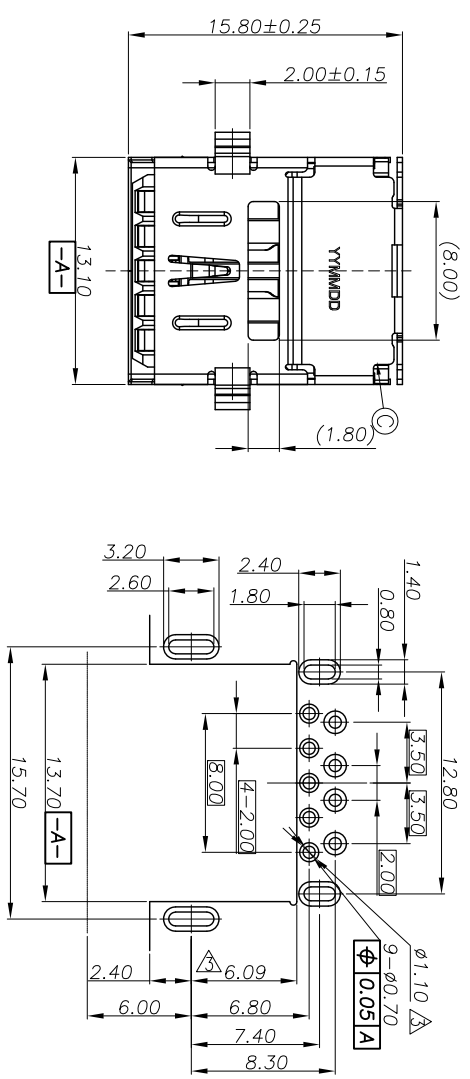

- SPECIFICATIONS:
1. ELECTRICAL CHARACTERISTICS:
- 1-1. CURRENT RATING: 1.8A (PIN1,4) ; OTHER CONTACTS 0.25A
 - 1-2. CONTACT RESISTANCE: 30mΩ MAX.
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR 1 MINUTE
 - 1-4. INSULATION RESISTANCE: 100MΩ MIN
2. MECHANICAL CHARACTERISTICS:
- 2-1. INSERTION FORCE : 3.0 Kgf MAX
 - 2-2. WITHDRAWAL FORCE : 1.0 Kgf MIN
3. DURABILITY: 5,000 CYCLES.
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. HALOGEN PRODUCT IDENTIFICATION MARK ON JACK: Ⓢ
6. HALOGEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: Ⓢ
7. FOR IR REFLOW PROCESS.
8. DATE : YYMMDD-
9. PACKAGING : TAPE & REEL.

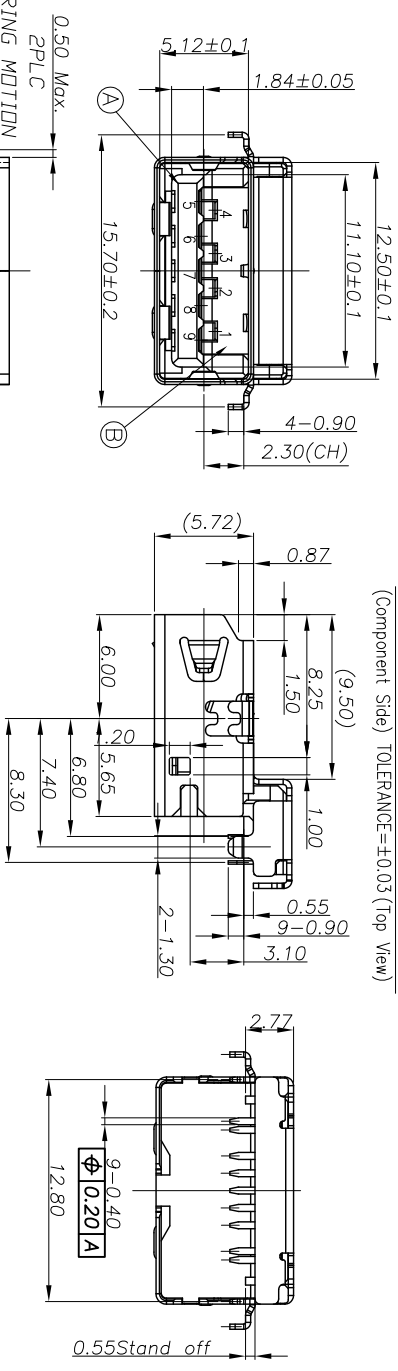

Pin	Signal NAME
1	VBUS
2	D-
3	D+
4	GND
5	SH4L_SSRX-
6	SH4L_SSRX+
7	GND_DRAIN
8	SH4L_SSTX-
9	SH4L_SSTX+

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
E	5-TERMINAL	5	BRASS T=0.20	
D	4-TERMINAL	4	COPPER ALLOY T=0.20	
C	SHELL	1	SUS430 H T=0.30	Ni60U" Min
B	BASE	1	PA-9T+45% GF	BLACK
A	HOUSING	1	PA-9T+45% GF	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

DECIMALS:	ANGLES:	TITLE
X : ±0.5	X : ±2°	USB 3.0 REVERSE CONNECTOR
X.X : ±0.3	X.X : ±1°	PART NO. 2UB3950-001101F
X.XX : ±0.2		CHKD James SCALE 1:1 UNIT: mm
		APVD boye SIZE: A3 SHEET: 1 OF 1 REV:A

CUSTOMER COPY