
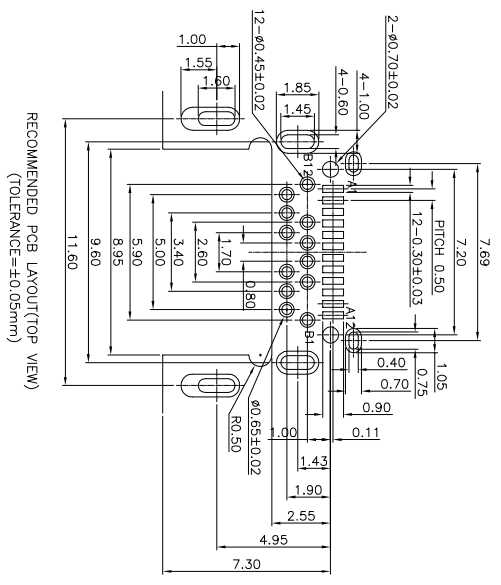
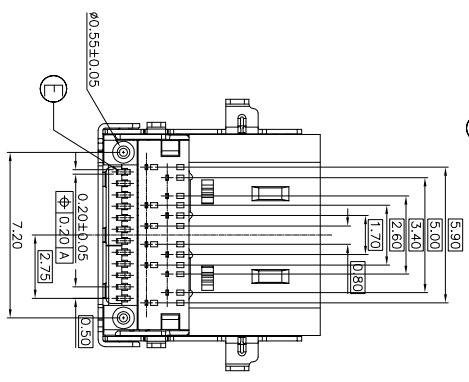
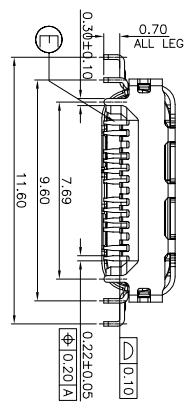

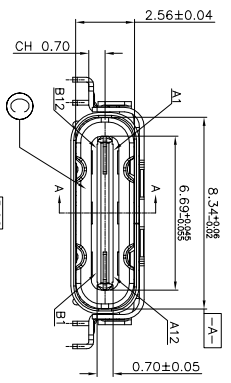




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	EVEN	2018.12.27

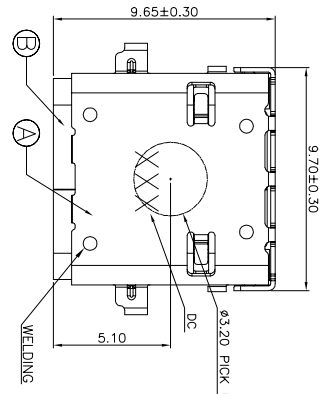

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 5.0A
 - VOLTAGE RATING: 200 V
 - LCR: VBUS& GND PINS: 40mΩ/PIN MAX
OTHER PINS : 40mΩ/PIN MAX
LCR MAX: CHANGE OF ALL PINS: 10mΩ
 - INSULATION RESISTANCE: 100MΩ MIN
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 0.5~2.0kg
 - WITHDRAWAL FORCE: 0.8~2.0kg (INITIAL) 0.6~2.0kg (AFTER LIFE TEST)
 - DURABILITY: 10,000 CYCLES.
 - TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING.
 - PACKAGE: SEE "SUB3C03-111211F" PACKAGE.
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - OTHER GENERAL SPEC. TO REFER "SUB3C03-111211F SPEC".

PART NO
SUB3C03-111211F

- SUFFIX: HALOGEN FREE
 - PACKAGE
 - 1: TAPE & REEL
 - HOUSING COLOR
 - 1: BLACK
 - CONTACT PLATING
- 2: 30μ" Au ON MATING AREA,
MATE Sn 60~150μ" ON SOLDERING AREA,
80~150μ" NICKEL UNDER PLATING OVERALL

E	TERMINAL	24	C19400-H	SEE PART NO.
D	SIGNAL	1	SUS 301	NICKEL PLATED 50μ"MIN.
C	HOUSING	1	LCP UL 94V-0	BLACK
B	INNER SHELL	1	SUS 301	NICKEL PLATED 50μ"MIN.
A	OUTSIDE SHELL	1	SUS 301	NICKEL PLATED 50μ"MIN.
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信音企業股份有限公司				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE USB TYPE C, Mid-mount(CH=0.70mm)				
DWN	EDA 2018.12.27	PART NO. SUB3C03-111211F		
CHKD		SCALE 1:1	UNIT: mm	
APVD	MGE2018.12.27	SIZE: A3	SHEET: 1 OF 1	REV: A
CUSTOMER COPY				