
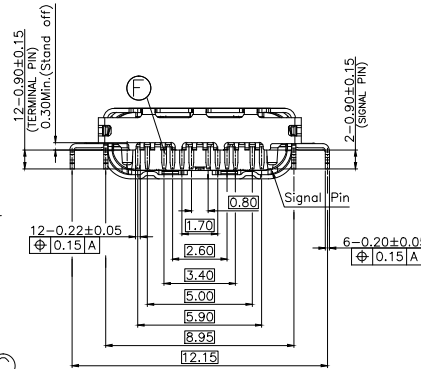
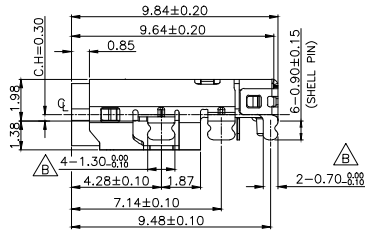
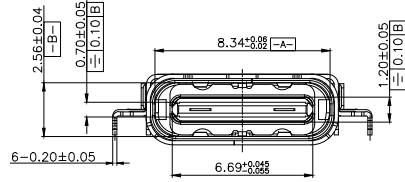
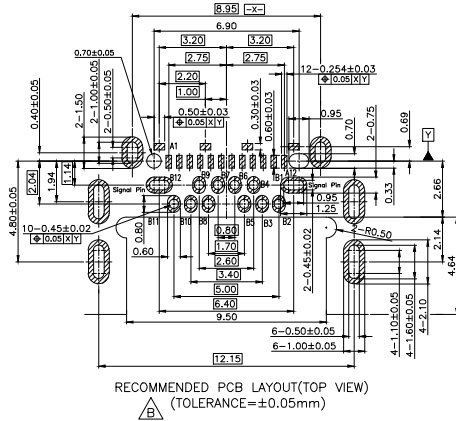
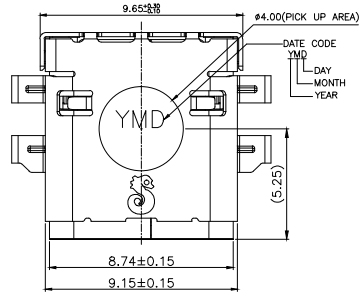


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	Even	2019.11.12
B	ECN NO: L201911-C09	IVY-C	2019.12.23

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:**
 - CURRENT RATING: 5.0A
 - VOLTAGE RATING: 20.0 V
 - LLCR: VBUS & GND PINS: 40mΩ/PIN MAX
OTHER PINS : 40mΩ/PIN MAX
LLCR MAX. CHANGE OF ALL PINS: 10mΩ
 - INSULATION RESISTANCE: 100MΩ MIN
- MECHANICAL CHARACTERISTICS:**
 - INSERTION FORCE: 0.5~2.0kg.
 - WITHDRAWAL FORCE: 0.8~2.0kg.(INITIAL 1000 CYCLES) 0.6~2.0kg.(AFTER LIFE TEST)
- DURABILITY:** 10,000 CYCLES.
- TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.**
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:** 
- PACKAGE:** SEE "2UB3C03-307111F" PACKAGE.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.**







PART NO.
2UB3C03-307111F

3: CH=0.30mm

SUFFIX: HALOGEN FREE

PACKAGE
1: TAPE & REEL
HOUSING COLOR
1: BLACK
CONTACT PLATING

1: 30u" Au ON MATING AREA,
MATTE Sn 60u" ON SOLDERING AREA,
50u" NICKEL UNDER PLATING OVERALL

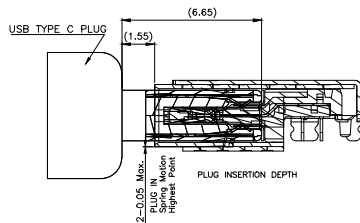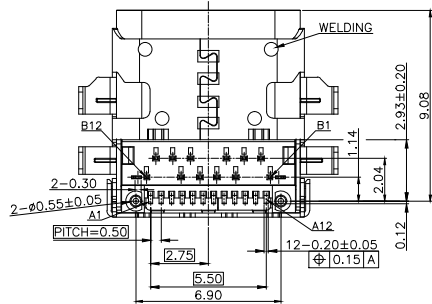



USB TYPE-C PIN ASSIGNMENTS:

A12	GND	B1	GND
A11	SSRxp2	B2	SSTxp2
A10	SSRXn2	B3	SSTXn2
A9	VBUS	B4	VBUS
A8	SBU1	B5	CC2
A7	Dn1	B6	Dp2
A6	Dp1	B7	Dn2
A5	CC1	B8	SBU2
A4	VBUS	B9	VBUS
A3	SSTXn1	B10	SSRXn1
A2	SSTxp1	B11	SSRXp1
A1	GND	B12	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

F	TERMINAL	24	C19400	SEE PART NO.
E	RFI PAD	2	SUS304	
D	SIGNAL	1	SUS301	
C	HOUSING	1	PA9T UL 94V-0	BLACK
B	INNER SHELL	1	SUS301	50u" MIN.NICKEL
A	OUTSIDE SHELL	1	SUS301	50u" MIN.NICKEL
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:
X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

 Singatron Enterprise Co., Ltd.  信音企業股份有限公司			
TITLE	USB TYPE C , Mid-mount(CH=0.30mm)		
DWN	NY-C 2019.12.23	PART NO. 2UB3C03-307111F	
CHKD	ANGELA2019.12.23	SCALE 1:1	UNIT: mm
APVD	ANGELA2019.12.23	SIZE: A3	SHEET:1 OF 1 REV: B
CUSTOMER COPY			