


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	VICTOR	2011.05.04
B	ECN NO : W110006	VICTOR	2011.05.31
C	ECN NO : T120071	VICTOR	2012.06.22

- SPECIFICATIONS:
1. ELECTRICAL CHARACTERISTICS:
- 1-1. CONTACT RESISTANCE:
30mΩ maximum when measured at 20mV maximum open circuit at 100mA
- 1-2. DIELECTRIC WITHSTANDING VOLTAGE:
The dielectric must withstand 500V AC Max With 1 Minute
- 1-3. INSULATION RESISTANCE:
1000M Ω minimum
- 1-4. CURRENT RATING:
1.5A at 250V AC minimum when measured at an ambient temperature of 25° C
2. MECHANICAL CHARACTERISTICS:
- 2-1. INSERTION FORCE : 3.5 Kgf MAX
- 2-2. WITHDRAWAL FORCE : 1.0 Kgf MIN
3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
4. HALOGEN PRODUCT IDENTIFICATION MARK IN JACK:Ⓢ
5. HALOGEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: Ⓢ
6. FOR IR-REFLOW LEAD-FREE PROCESS.
7. DATE : YYMMDD
8. PACKAGING : TAPE & REEL.

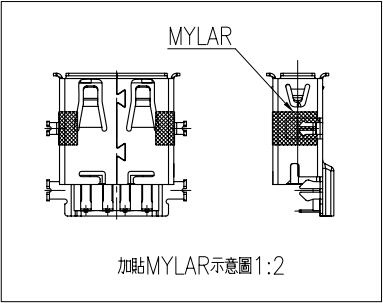

Pin Number	Signal NAME
1	VBUS
2	D-
3	D+
4	GND

E	MYLAR	2	KAPTON 8.0x4.0	YELLOW
D	MYLAR	1	KAPTON 11.0x8.0	YELLOW
C	TERMINAL	4	COOPER ALLOY	GOLD FLASH PLATED ON MATING AREA, Matt. Sn 100u"Min. PLATED ON SOLDERING 60u" NICKEL UNDER PLATING OVERALL
B	SHELL	1	STAINLESS STEEL	NICKEL 60u"MIN
A	HOUSING	1	HIGH THERMOPLASTIC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2		ANGLES: X :±2° X.X :±1°		TITLE USB 2.0 REVERSE CONNECTOR
DWN	VICTOR	PART NO.2UB4026-300111F		
CHKD		SCALE 1:1	UNIT: mm	Ⓢ
APVD	ANGELA 2012.6.22	SIZE: A3	SHEET:1 OF 1	REV: C
CUSTOMER COPY				