
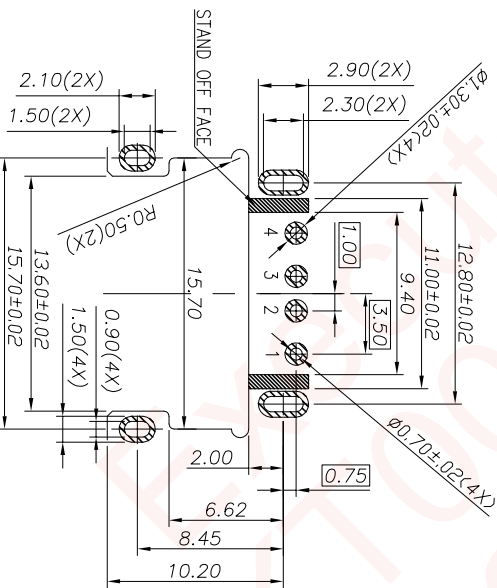


3D VIEW

- SPECIFICATIONS:**
- 1. ELECTRICAL CHARACTERISTICS:**
- 1-1. CONTACT RESISTANCE: 30mΩ maximum when measured at 20mV maximum open circuit at 100mA
 - 1-2. DIELECTRIC WITHSTANDING VOLTAGE: The dielectric must withstand 100V AC Max With 1 Minute
 - 1-3. INSULATION RESISTANCE: 100MΩ minimum
 - 1-4. CURRENT RATING: 1.5A at 250V AC minimum when measured at on ambient temperature of 25° C
- 2. MECHANICAL CHARACTERISTICS:**
- 2-1. INSERTION FORCE : 3.5 Kgf MAX
 - 2-2. WITHDRAWAL FORCE : 1.0 Kgf MIN
3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
4. HALOGEN FREE IDENTIFICATION MARK ON JACK:
5. HALOGEN FREE IDENTIFICATION LABEL ON PACKAGING:
6. FOR WAVE SOLDERING LEAD-FREE PROCESS.
7. DATE : YYMMDD
8. PACKAGING : TAPE & REEL.

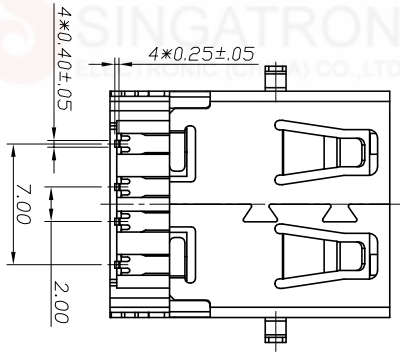

Recommended P/CB Layout (THICKNESS=1.2mm)
(Component Side) TOLERANCE=±0.03

C	TERMINAL	4	COOPER ALLOY	2.7μm OVER 30.7μm/Pd/IN PLATED ON MATING AREA, 20μm Ni PLATED ON SOLDERING 800 NICKEL UNDER PLATING OVERALL
B	SHELL	1	STAINLESS STEEL	NICKEL 60U"MIN
A	HOUSING	1	HIGH THERMOPLASTIC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信昌企業股份有限公司				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE USB 2.0 REVERSE CONNECTOR				
DMN	Charles	PART NO.	2UB4030-300112F	
CHKD	James	SCALE	1:1	UNIT: mm
APVD	Boye	SIZE: A3	SHEET: 1 OF 1	REV: A

CUSTOMER COPY