
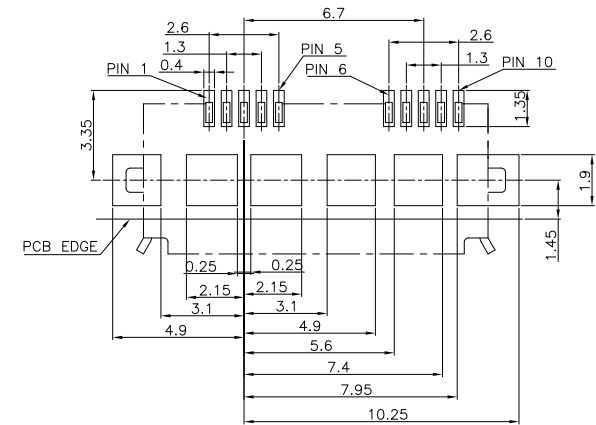
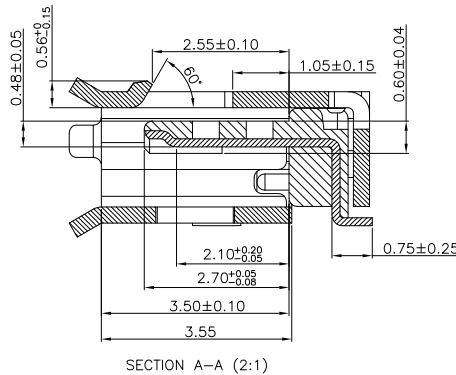
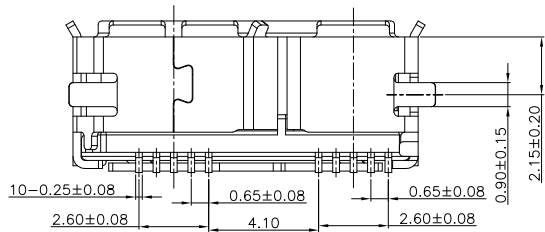

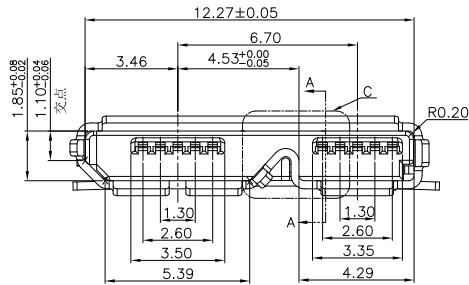



RoHS Compliant

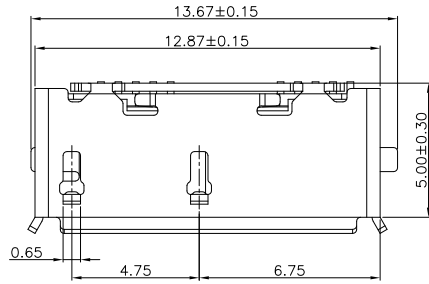

RECOMMENDED P.C.B LAYOUT

2UB630- 10167 - XXX-XX

SERIES CODE: FEMALE
 Mould FLOW NO.
 FLOW NO.
 MATERIAL: A: LCP

1: TRAY PACKAGING
 2: TAPE REEL PACKAGE
 1: RoHS 2: HALOGEN FREE

PLATING:
 1: G/F 4: Gold 10u"
 2: Gold 3u" 5: Gold 15u"
 3: Gold 5u" 6: Gold 30u"
 COLOR: 2: WHITE 5: BLACK 9: BLUE

- REMARKS:
- MATERIALS
 - HOUSING: LCP UL94V-0
 - TERMINALS: C2680R-H, T=0.15, CONTACT AREA SELECTIVE GOLD PLATED OVER NICKEL, SOLDERING TAIL AREA TIN PLATED OVER NICKEL
 - SHELL: SUS304, T=0.30, NICKEL PLATED
 - CHARACTERISTICS
 - CURRENT RATING: 1.5A
 - CONTACT RESISTANCE: 30mΩ MAX
 - INSULATION RESISTANCE: 100MΩ MIN
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC
 - SOLDERING: TEMPERATURE 245+/-5°C, 3-5 SECONDS.
 - INSERT FORCE: 3.5kgf MAX, WITHDRAWAL FORCE: 1.00kgf MIN
 - DURABILITY: 10000 CYCLES
 - HEAT RESISTANCE: IR TEST 260+/-10°C
 - OPERATING TEMPERATURE: -20°C ~ +60°C

—	B	19.05.31	变更料号	P.H	Kim
—	A	12.02.25	RELEASE		
ECN. NO	REV	DATE	DESCRIPTION	CHANGED	APPROVED

TOLERANCES UNLESS	
.X ± 0.38	.X° ± 3'
.X ± 0.30	.X° ± 2'
.XX ± 0.20	.XX° ± 1'
.XXX ± 0.10	.XXX° ± 0.5'

Singatron Enterprise Co., Ltd.			
TITLE	Micro USB 3.0 BF 90° SMT L=5.6 两脚贴板 有卷边		
DWN	Jenny	PART NO.	2UB630- 10167 - XXX-XX
CHKD		SCALE 1:1	UNIT: mm
APVD		SIZE: A3	SHEET: 1 OF 1 REV: B
CUSTOMER COPY			