




REV	ECN DESCRIPTION	DATE	ECR
A0	新版发行	2012-3-25	

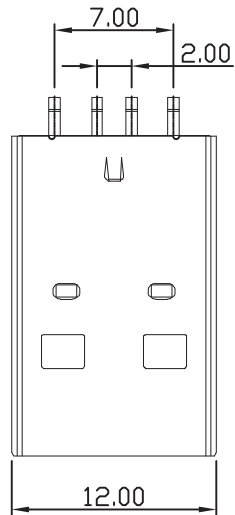

2UP207 - 03 - 3 - XXX - X


包材
T: TRAY(吸塑盒)
P: TAPE REEL(载带)
U: TUBE(管子)

产品系列
品名流水码
同种产品, 外形尺寸分类




端子电镀
鍍前金後錫: H: 1u"
J: 5u"
N: 30u"

外壳电镀
C: 鍍亮镍

胶心颜色
B: 黑色
w: 白色

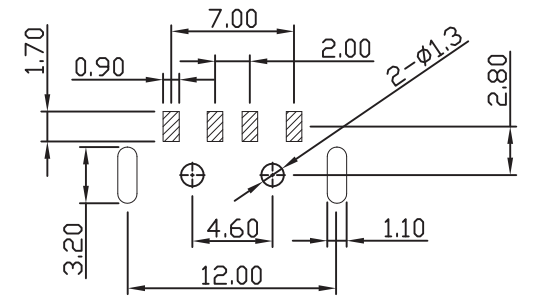

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: ±0.05)

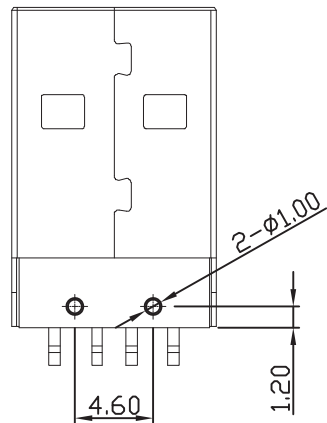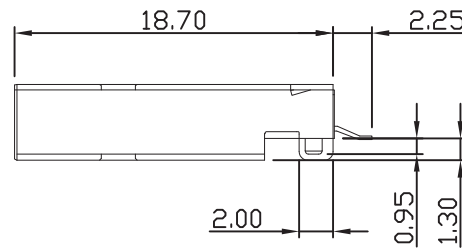

1. MATERIAL:

- 1.1 INSULATOR: HIGH TEMPERATURE PLASTIC, UL94V-0; COLOR: NATURE.
- 1.2 CONTACT: COPPER ALLOY.
- 1.3 SHELL: STEEL.

2. FINISH:

- 2.1 CONTACT: GOLD PLATED IN CONTACT AREA. TIN PLATED IN SOLDER AREA. NICKEL UNDERPLATED OVERALL.
- 2.2 SHELL: NICKEL UNDERPLATED OVERALL.

3. ELECTRICAL CHARACTERISTICS

- 3.1 VOLTAGE RATING: 30V.
- 3.2 CURRENT RATING: 1.5 A.
- 3.3 CONTACT RESISTANCE: 30mΩ MAX.
- 3.4 INSULATION RESISTANCE: 1000MΩ MIN.
- 3.5 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.
- 3.6 OPERATING TEMPERATURE: -55°C ~ +85°C.
- 3.7 SOLDFR TAIL COPLANARITY 0.15mm MAX.

ITEM	PART NAME	Q' TY/PCS	MATERIALS	NOTE

GENERAL TOLERANCE		DWG NO	2UP207-03-3-XXX-X	DRAWING	KEVIN	SCALE	
X.±0.30	x.±	TITLE	USB AM 180度 SMT	CHECKED	/	UNIT	mm
.X±0.25	.x'±2'			APPROVAL	ROY		
.XX±0.20	.xx'±1'	PART NO	2UP207-03-3-XXX-X	DATE	2012-3-25		
.XXX±0.10	.xxx'±0.5'	SHEET	SINGATRON (U.S.A.)				
REV	A/0	SIZE					