
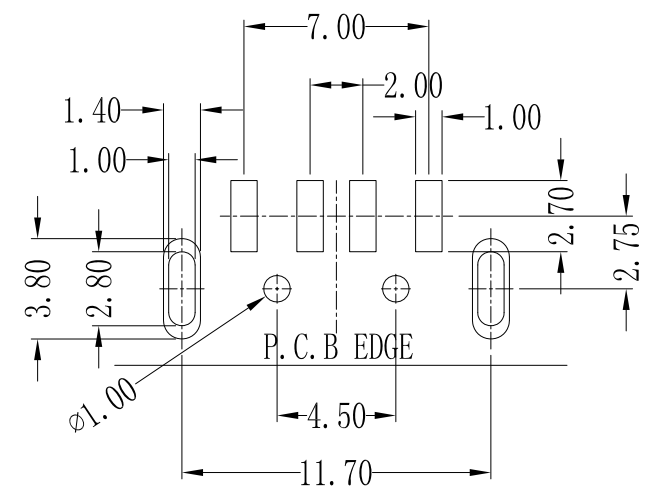
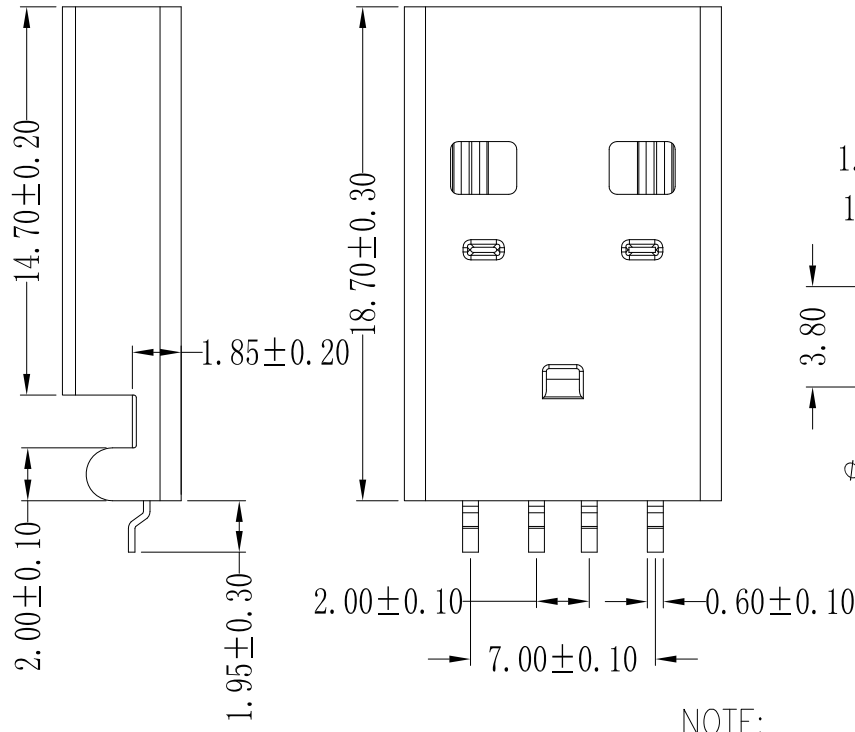
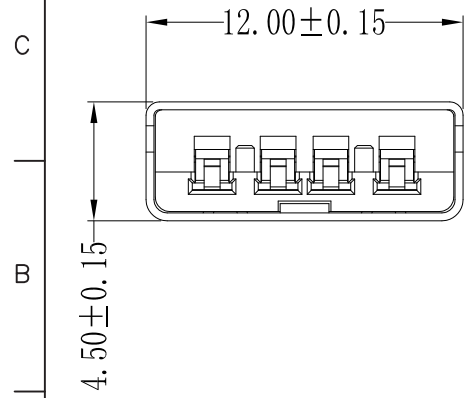


ROHS

REV	ECN	DESCRIPTION	DATE	ECR
A		新版发行	2012/03/25	

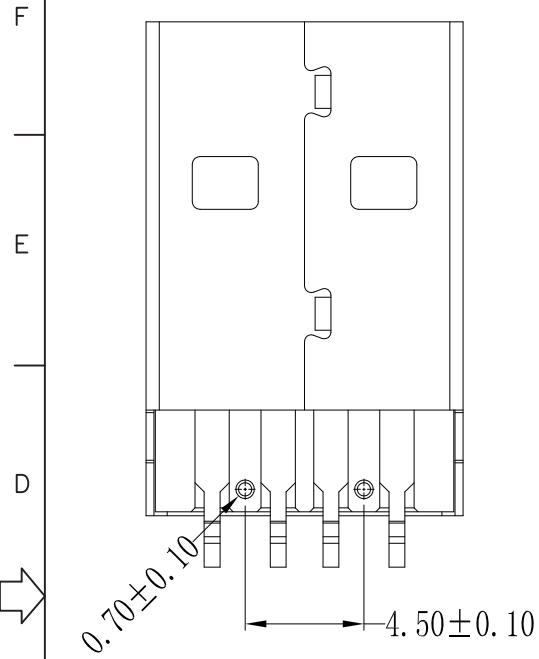

**2UP207 - 03 - 4 - XXX - X**

产品系列  
 品名流水码  
 同种产品, 外形尺寸分类  
 端子电镀  
 鍍前金後錫:H:1u"  
 N:30u"  
 包材  
 P:TAPE REEL(載帶)  
 胶心颜色  
 B: 黑色(Black)  
 W: 白色(White)  
 外壳电镀  
 C: 鍍亮镍

- NOTE:
- 1.1 Contact resistance: 30 mΩ Max
  - 1.2 Insulation resistance: 1000 MΩ min
  - 1.3 Dielectric voltage: 500V AC one sec level
  - 1.4 Operating temperature: -55°C ~ -105°C
  - 1.5 Total mating force: 3.5 Kgf Max.
  - 1.6 Total unmating force: 1.0 Kgf Min.

GENERAL TOLERANCE	
X. ±0.30	x. °±
.X±0.25	.x°±2°
.XX±0.20	.xx°±1°
.XXX±0.10	.xxx°±0.5°

ITEM	PART NAME	Q' TY/PCS	MATERIALS	NOTE
③	CONTACT	4	BRASS	GOLD FLASH/1u"/30u"
②	HOUSING	1	LCP	BK/WH
①	SHELL	1	SPCC	NICKE PLATING

<b>Singatron Enterprise Co., Ltd.</b>				
TITLE	USB AM 180度SMT有柱沉板式			
DWN	赵振	PART NO.	2UP207-03-4-XXX-X	
CHKD	赵振	SCALE 1:1	UNIT: mm	④
APVD	李汉武	SIZE: A3	SHEET: 1 OF 1	REV: A
<b>CUSTOMER COPY</b>				