


4	WHITE (28AWG)	2
3	GREEN(28AWG)	3
2	BLACK(24AWG)	4
1	RED (24AWG)	1
Conn.1	WIRE COLOR	Conn.2

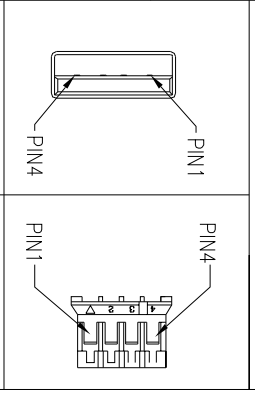

- NOTES:
1. WATERPROOF RATE: IP67(WHEN PROPERLY MATED)  
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
  2. RATING:30V 1A
  3. OTHER GENERAL SPEC. TO REFER "2UP2002 SERIES SPEC."
  4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
  6. TEMPERATURE RANGE: -20~80℃
  7. TIGHTENING TORQUES: 0.8~1.0Nm(7.08~8.85lb.in.).
  8. SCREW NUT无需组作附件随包装出货。

K	HOUSING	1	JWT A2001H02-4P	WHITE
J	TERMINAL	4	JWT A2001TOP-00	NA
I	WIRE	1	28AWG VW-1	WHITE
H	WIRE	1	28AWG VW-1	GREEN
G	WIRE	1	24AWG VW-1	BLACK
F	WIRE	1	24AWG VW-1	RED
E	SCREW NUT	1	PC UL94V-0	BLACK
D	BODY	1	PPE 540Z UL94V-0	BLACK
C	LIQUID GLUE	1	JA940-4	BLACK
B	USB A PLUG	1	USB 2.0 UL94V-0	N/A
A	GASKET	1	EPDM	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:	TITLE	WATERPROOF USB2.0 A PLUG
X :±0.5	X :±2°	DWN	RZ
X.X :±0.3	X.X :±1°	CHKD	Jun
X.XX :±0.2		APVD	JF

CUSTOMER COPY

REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A210524-6A		RZ	2022.05.06