



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO:1181226-3A		Vcky	2019.02.15
B	ECN NO.:S202211-R10		JAY	2022.11.22

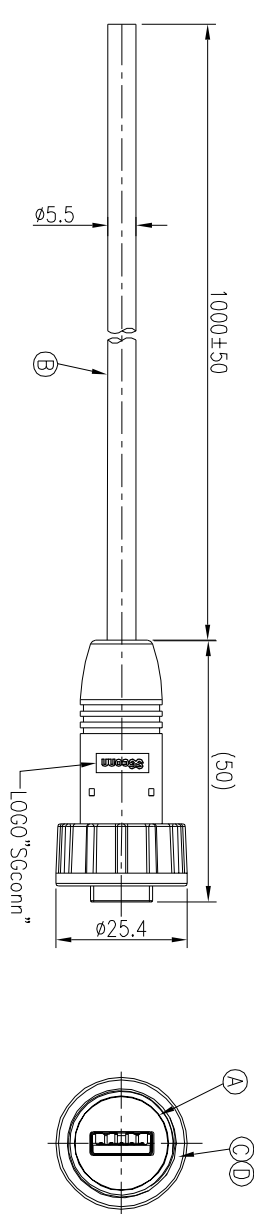

BRAID	SHIELD
YELLOW	9
BLUE	8
DRAIN	7
ORANGE	6
PURPLE	5
BLACK	4
GREEN	3
WHITE	2
RED	1

WIRE COLOR	CONN.
PIN OUT	



Pin Assignments
Front View

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - 1-1 CURRENT RATING: 1.0 AMPS.
 - 1-2 CONTACT RESISTANCE: 3 Ohm Max.
 - 1-3 INSULATION RESISTANCE: 100MOhm Min. at 500VDC.
 - 1-4 BREAKDOWN VOLTAGE: 500 VAC PER MINUTE.
 - ENVIRONMENTAL:
 - 2-1 OPERATING TEMPERATURE: -20°C TO +80°C.
 - 2-2 SEALING REQUIREMENTS: IP67.
 - FOR TECHNICAL DATA REFER TO YOUR LOCAL SINGATRON ELECTRONICS SALES OFFICE.
 - ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **RoHS, PAHS**

G	TUBE	2	Ø2.0(125'.300V)	BLACK
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	TPU	BLACK
D	GASKET	1	Silicone	BLACK
C	SCREW NUT	1	PC	BLACK

B	CABLE	1	UL2725 (1P*28#+D+AL +M)*2+1P*28#+2C*24#+F+AL+B Ø5.5	BLACK(PVC JACKET)
A	USB CONN.	1	USB 3.0 PLUG	BLUE

UNLESS OTHERWISE SPECIFIED TOLERANCES				
TITLE USB 3.0 PLUG WITH CABLE				
DWN	JAY	PART NO.2UP3032-W09100H	SCALE 1:1	UNIT: mm
CHKD	MF	SIZE: A3	SHEET: 1 OF 1	REV: B
APVD	JF	CUSTOMER COPY		

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	