

1 2 3 4 5 6 7 8

F




E

D

C

B

A

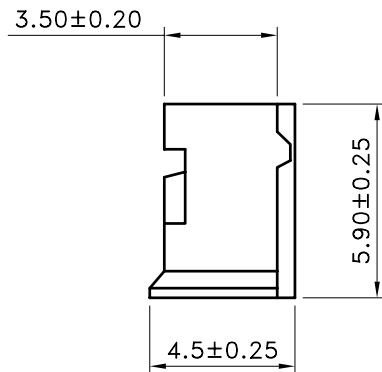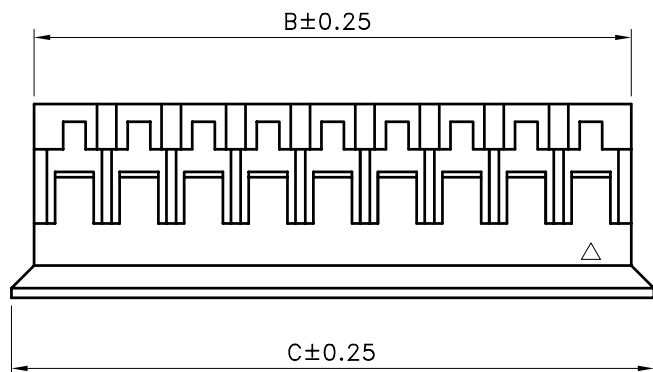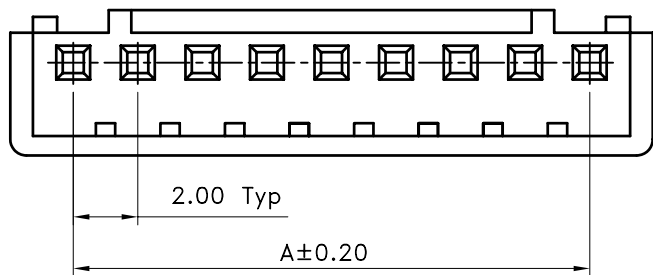

■ SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 1000MΩ min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20mΩ max

■ HOUSING

- Part No. : 2WB1101-XX
- Poles : 2~15
- Material : Nylon 66 UL94V-0
- Q ' ty: 1000 pcs./Bag

Poles	Part No.	Dimensions (mm)		
		A	B	C
2	2WB1101-02	2.00	4.50	5.60
3	2WB1101-03	4.00	6.50	7.60
4	2WB1101-04	6.00	8.50	9.60
5	2WB1101-05	8.00	10.50	11.60
6	2WB1101-06	10.00	12.50	13.60
7	2WB1101-07	12.00	14.50	15.60
8	2WB1101-08	14.00	16.50	17.60
9	2WB1101-09	16.00	18.50	19.60
10	2WB1101-10	18.00	20.50	21.60
11	2WB1101-11	20.00	22.50	23.60
12	2WB1101-12	22.00	24.50	25.60
13	2WB1101-13	24.00	26.50	27.60
14	2WB1101-14	26.00	28.50	29.60
15	2WB1101-15	28.00	30.50	31.60

TOLERANCE	LTR	REVISION RECORD	DATE	LTR	REVISION RECORD	DATE
.0	±0.3	ECR	RoHS Compliant	06/04/01		
.00	±0.2	ECR	200808-017	08/08/27		
.000	±0.1					
ALL	±					
ANGLE						
0°	±					
.0°	±					

Singatron Enterprise Co., Ltd.

TITLE	2.00mm Crimp Style Connectors Housing		
DWN	黄科源	PART NO.	2WB1101-XX
CHKD		SCALE	1:1 UNIT: mm
APVD	林宗	SIZE: A3	SHEET: 1 OF 1 REV: a2

Conforms to The RoHS Instruction

CUSTOMER COPY

1 2 3 4 5 6 7 8