

1 2 3 4 5 6 7 8

F

F

E

E

D

D

C

C








B

B

A

A

7.50±0.2

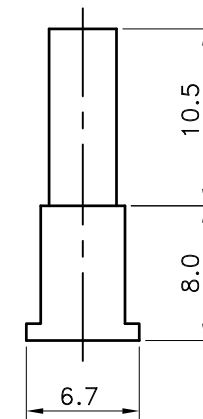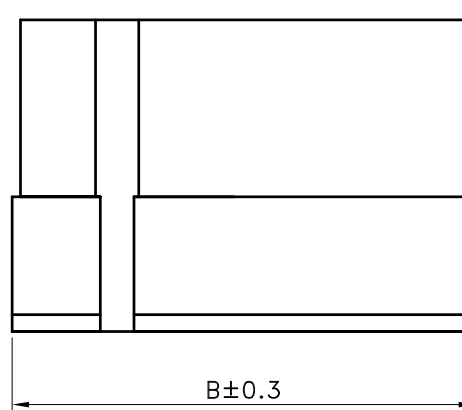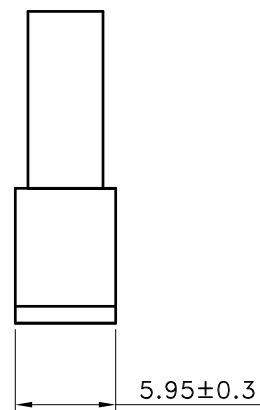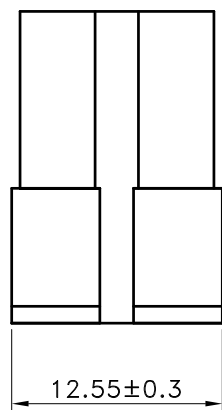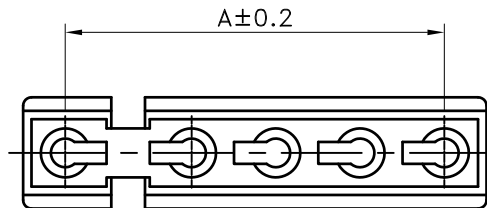

■ SPECIFICATIONS

- Voltage Rating : 125 V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 1,000M Ω min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20m Ω max

■ HOUSING

- Part No. : 2WB1102-XX
- Poles : 1 - 6
- Material : Nylon 66 UL94V-0
- Q' ty : 1,000 pcs./Bag

△ 2WB1102-02

2WB1102-01

△ 2WB1102-03~06

Poles	Part No.	Dimensions(mm)	
		A	B
1	2WB1102-01	See the Drawing	
2	2WB1102-02	See the Drawing	
3	2WB1102-03	7.50+(5.00x1)	17.55
4	2WB1102-04	7.50+(5.00x2)	22.55
5	2WB1102-05	7.50+(5.00x3)	27.55
6	2WB1102-06	7.50+(5.00x4)	32.55

TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
.0	±0.30	△1	余秀麗	2007/01/04	△8			
.00	±0.20	△2	黃科源	2008/12/24	△9			
.000	±0.10	△3	吳弘文	2016/01/04	△10			
ANGLE		△4						
0°	±1°	△5						
.0°	±	△6						
SHEET	1/1	△7						

Singatron Enterprise Co., Ltd.

TITLE	5.00mm Crimp Style Connectors Housing		
DWN	吳弘文	PART NO. 2WB1102-XX	
CHKD	周慈雲	SCALE 1:1	UNIT: mm
APVD	張育瑞	SIZE: A3	SHEET: 1 OF 1 REV: a3
CUSTOMER COPY			

CUSTOMER
Conforms to The RoHS Instruction