

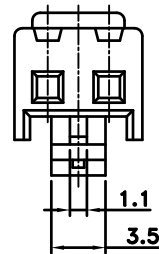
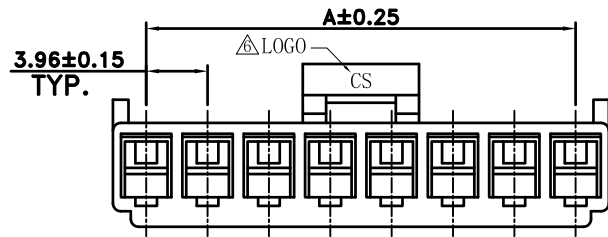

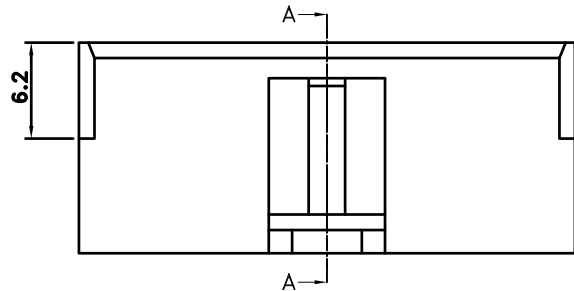


SECTION: A-A



2Pin VIEW



3D VIEW

SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 7A AC/DC
- Withstanding Voltage : 1500V AC/minute
- Insulation Resistance : 1000MΩ min
- Temperature Range : - 25°C to + 85°C
- △ • Contact Resistance : 10mΩ max

HOUSING

- Part No. : 2WB1121-XX (XX) XX
Ordering Code ① ② ③
- ① Poles : 2-15
- ② Material:
Blank : Nylon 66 UL94-V0
SM : SCHULAMID (Nylon 6 UL94-V2)
- △ ③ Color: Blank: Nature
R : Red(199C)
BU: Blue(660C)
Y : Yellow(122C)
BK: Black
- Applicable Terminal : 2WT1121-TXX
- Mates With : 2WB1120R-XX; 2WB1120

Poles	Dimensions (mm)	
	A	B
2	3.96	8.25
3	7.92	12.21
4	11.88	16.17
5	15.84	20.13
6	19.80	24.09
7	23.76	28.05
8	27.72	32.01
9	31.68	35.97
10	35.64	39.93
11	39.60	43.89
12	43.56	47.85
13	47.52	51.81
14	51.48	55.77
15	55.44	59.73

TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
.0	±0.30	△ 200504-007	XXX	2005/04/21	△	SPC. Update	吳弘文	2013/10/18
.00	±0.20	△ 200508-003	XXX	2005/08/26	△			
.000	±0.10	△ 200711-004	XXX	2007/11/15	△			
ANGLE		△ 201006-008	XXX	2010/06/28	△			
0°	±1°	△ 2010116-001	XXX	2010/10/27	△			
.0°	±	△ Chang the LOGO position	JACK	2012/07/10	△			
SHEET	1/1	△ Add New Type product	JACK	2012/07/17	△			

Singatron Enterprise Co., Ltd.

TITLE	3.96mm Crimp Style Connectors Housing		
DWN	吳弘文	PART NO.	2WB1121-XX (XX) XX
CHKD	黃科源	SCALE	1:1 UNIT: mm
APVD	張育瑞	SIZE: A3	SHEET: 1 OF 1 REV: a8

CUSTOMER COPY

CUSTOMER
Conforms to The RoHS Instruction