

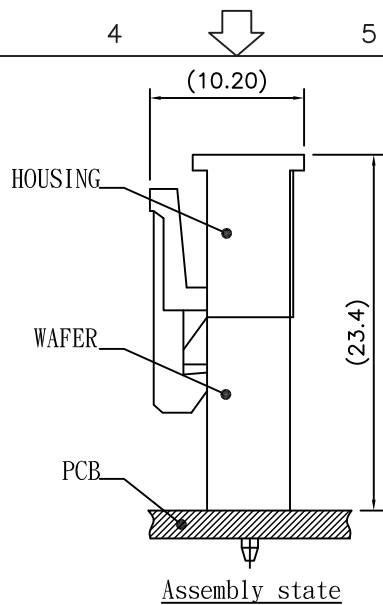
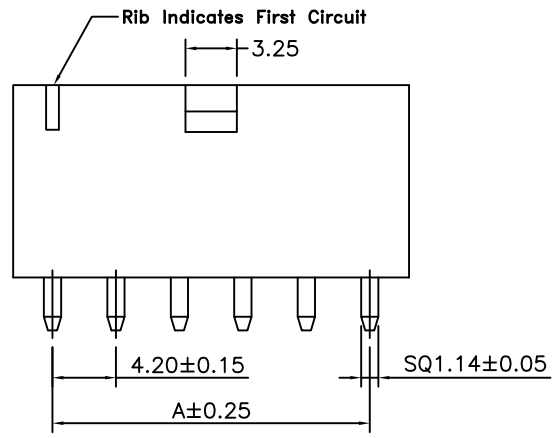


Recommended PCB Layout(Top View)  
General tolerance:±0.05mm

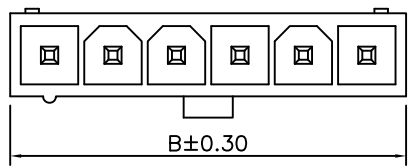

Assembly state




**SPECIFICATIONS**

- Current Rating : 7A AC/DC
- Withstanding Voltage : 1500V AC/minute
- Insulation Resistance : 1000MΩ min
- Temperature Range : - 40°C to + 105°C
- Contact Resistance : 20mΩ max

**WAFER**

- ▲ Part No. : 2WB1150SSP-XX X (XX) XX  
① ② ③ ④
- ① Poles : 2~6
  - ② RIB: Blank : Without Rib(Standard Type)  
NR : With Rib
  - ③ Material : Blank : NY 66 UL94V-2  
V0 : NY 66 UL94V-0 ▲
  - ④ Color : Blank : Nature  
BK : Black

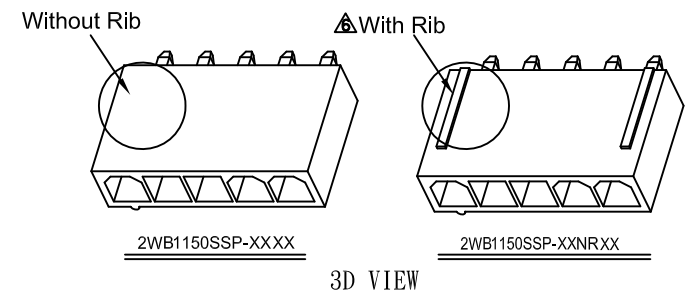

3D VIEW

Poles	Dimensions(mm)		SAMPLE
	A	B	
2	4.20	9.60	
3	8.40	13.80	
4	12.60	18.00	
5	16.80	22.20	
6	21.00	26.40	

TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
.0	±0.30	▲			▲			
.00	±0.20	▲			▲			
.000	±0.10	▲			▲			
ANGLE		▲						
0°	±1°	▲	修正電流為7A，併圖	劉怡瑩	2011-04-01			
.0°	±	▲	增加無肋條項，併圖	周美麗	2011-06-09			
SHEET	1/1	▲	增加材質說明&料號編碼改為球標方式	周家慶	2018-04-24			

**CUSTOMER**  
Conforms to The RoHS Instruction

Singatron Enterprise Co., Ltd.			
TITLE	4.20mm Crimp Style Connector		
DWN	周家慶	PART NO.	2WB1150SSP-XX X (XX) XX
CHKD	簡鴻彬	SCALE	1:1 UNIT: mm
APVD	張育瑞	SIZE	A3 SHEET:1 OF 1 REV:a7
<b>CUSTOMER COPY</b>			