


REV	EQU. NO.	REVISIONS	REV/DRAWN	DATE
C		更改孔的尺寸	YU	08-03/09
D		增加芯轴材料号说明	YU	07-02/06
E			Yuqilong	2008/11/03
F		<b>1.45</b> 改成 <b>1.37</b>	hejihuai	2009/02/24

**SPECIFICATIONS**

- Rated Voltage : 50V AC/DC
- Rated Current : 1A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 100MΩ min
- Temperature Range : -25°C to +85°C
- Contact Resistance : 20mΩ max

- Part No Legend : 2WB1253-XX-XXXX-XX
- Poles: 2~20
- Blank&DO: PA66
- (Color) Blank: Nature
- Bk: Black
- NH: Halogen Free
- Blank: Normal

Material: PA66 UL 94V-0  
Qty: 1,000 pcs/Bog

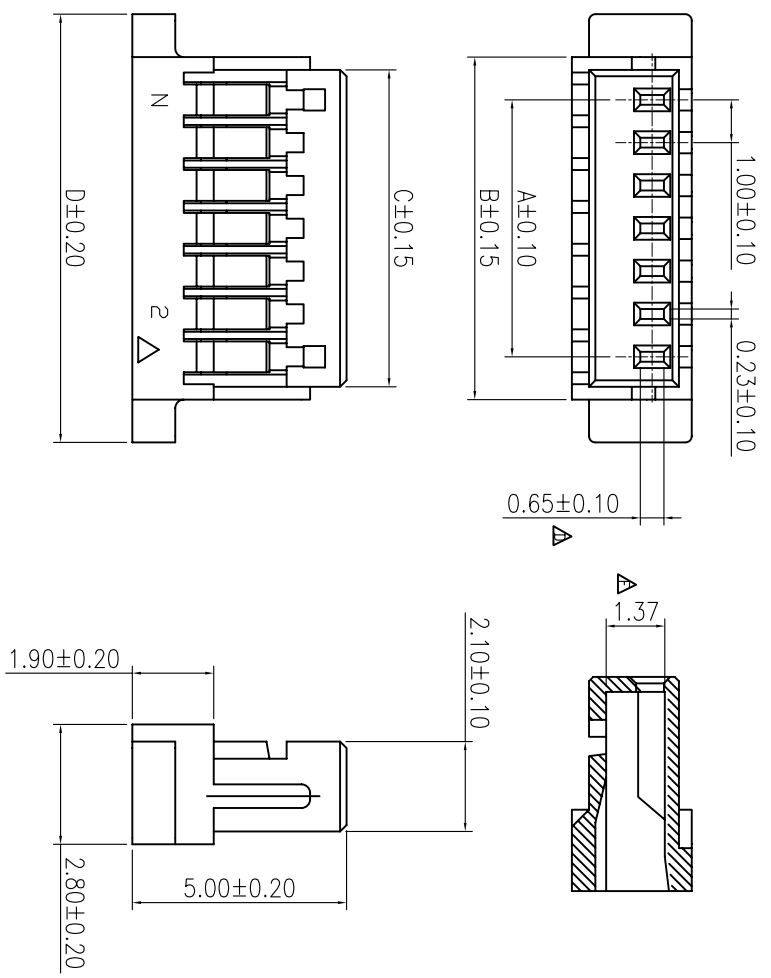

POLES	DIMENSIONS			
	A	B	C	D
2	1.00	3.00	2.40	5.00
3	2.00	4.00	3.40	6.00
4	3.00	5.00	4.40	7.00
5	4.00	6.00	5.40	8.00
6	5.00	7.00	6.40	9.00
7	6.00	8.00	7.40	10.00
8	7.00	9.00	8.40	11.00
9	8.00	10.00	9.40	12.00
10	9.00	11.00	10.40	13.00
11	10.00	12.00	11.40	14.00
12	11.00	13.00	12.40	15.00
13	12.00	14.00	13.40	16.00
14	13.00	15.00	14.40	17.00
15	14.00	16.00	15.40	18.00
16	15.00	17.00	16.40	19.00
17	16.00	18.00	17.40	20.00
18	17.00	19.00	18.40	21.00
19	18.00	20.00	19.40	22.00
20	19.00	21.00	20.40	23.00

**Singatron Enterprise Co., Ltd.**

1.00mm Crimp Style Connector

TITLE	PART NO.	UNIT	REV.
DWN	2WB1253-XX-XXXX-XX	mm	F
CHKD	SCALE 1:1	mm	F
APVD	SIZE: A3 SHEET: 1 OF 1	mm	F

CUSTOMER COPY