


REV	ECN.NO.	REVISIONS	REV.DRAWN	DATE
A		初版发行	YU	06/10/19
B		更改尺寸 37.35±0.1 → 37.35±0.15	YU	07-01/02
C	09169	材料由 PA46 改 LCP	hejihuai	09-09/11
D	----	增加 Layout	hejihuai	09-11/12
E	----	增加无卤代	sunquan	10-08/19

SPECIFICATIONS:

- .Voltage Rating :200V AC/DC
- .Current Rating : 1A AC/DC
- .Withstanding Voltage : 500V AC/minute
- .Insulation Resistance : 100M Ω MIN
- .Temperature Range : -25°C to +85°C
- .Contact Resistance : 20m Ω MAX

WAFER

- . Part No: 2WB1267-30-NH
 - Blank: Norma
 - NH: Halogen Free
- . Pole: 30
- . Material: Base: LCP, UL 94V-0
 - Contact: Phos.bronze
 - Ear: Phos.Bronze
 - Shell: Phos.Bronze
- . Finish: Gold/Tin Plated
- . Color: Nature
- . Q'ty: 2,000pcs/Reel
- . Halogen free product identification LOGO on the packing

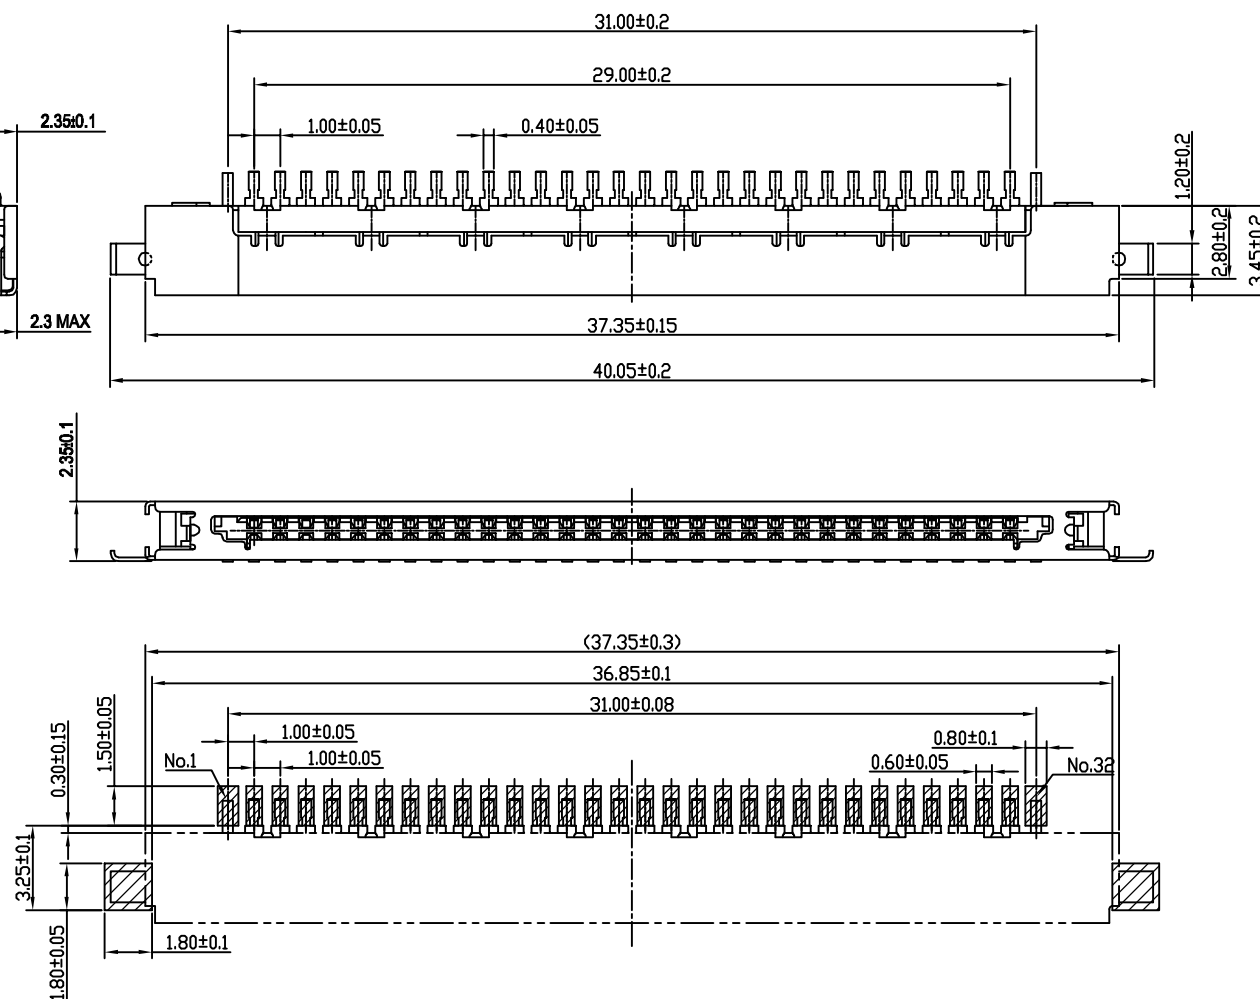

Recommended PCB Layout

X.	0.50	X.	3.0'
.X±	0.30	.X'±	2.0'
.XX±	0.15	.XX'±	1.0'
.XXX±	0.05	.XXX'±	0.5'

Singatron Enterprise Co., Ltd.			
TITLE	1.0 B. TO C.LCD Conn.(SMT)		
DWN	hejihuai	PART NO.2WB1267-30-NH	
CHKD	10-08/19	SCALE 1:1	UNIT: mm
APVD	liuzhiwen	SIZE: A3	SHEET:1 OF 1
		REV: E	

CUSTOMER COPY