


FEATURES:

- 2-12 Circuits
- Positive latching to mating headers or plugs
- Nylon, [UL 94V-0], Black
- Fully polarized to mating and plugs
- Fully isolated terminals
- Accepts double cantilever crimp terminal 2WT13025-T-T
- Integral pull tabs for ease in unmating


SPECIFICATIONS:

- Voltage rating: 9A AC, DC Per circuit
- Current rating: 5A AC, DC Per circuit
- Contact resistance: Initial Value/10mΩ max.
- Insulation resistance: 1000 MΩ min
- Withstand Voltage: 1500V AC/minute

	DIM.A	DIM.B
02	3.0	6.85
03	6.0	9.85
04	9.0	12.85
05	12.0	15.85
06	15.0	18.85
07	18.0	21.85
08	21.0	24.85
09	24.0	27.85
10	27.0	30.85
11	30.0	33.85
12	33.0	36.85

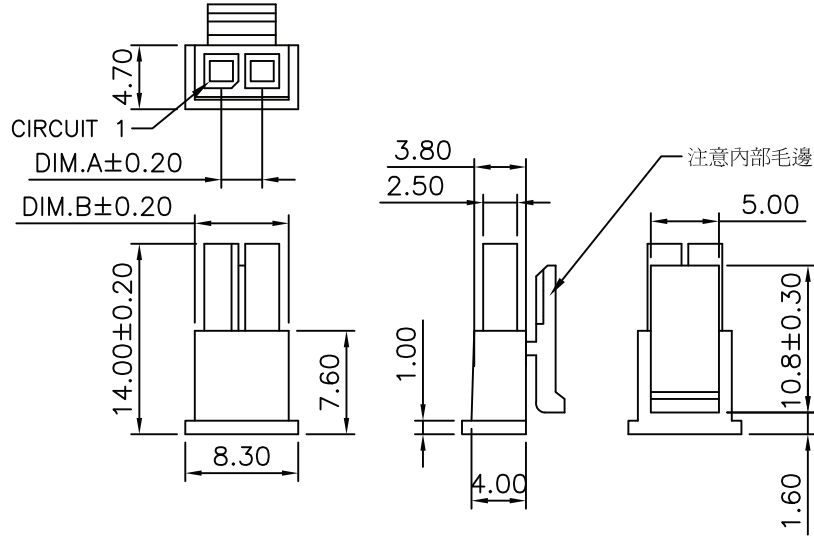

For 2 Pin

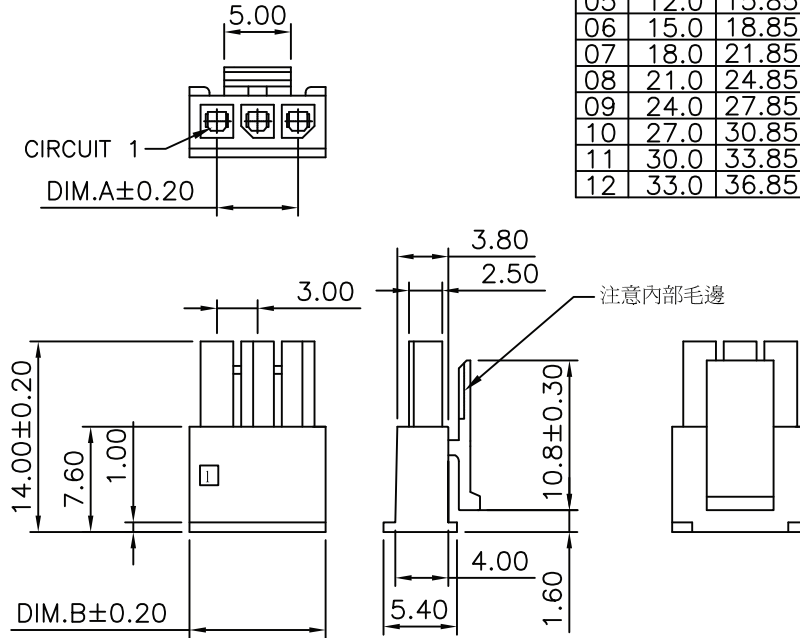

For 3-12 Pin

RoHS compliant

UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd.			
DECIMALS:	ANGLES:	TITLE	3.00mm Pitch, Micro Fit, Housing		
X :±0.5	X :±2°	DWN	Lily	PART NO. 2WB13645-XXP-V0-A	
X.X :±0.3	X.X :±1°	CHKD	2013.03.14	SCALE 1:1	UNIT: mm
X.XX :±0.2		APVD		SIZE: A3	SHEET:1 OF 1
CUSTOMER COPY					