


# 2WB13650-XXPRT-B-SMT-PB Series

## FEATURES:


- . 2-12 Circuits
- . Housing: High temperature LCP, UL 94V-0
- . Plating: Tin, select Gold
- . Contact: Brass

## SPECIFICATIONS:

- . Current rating: 5A AC, DC
- . Voltage rating: 250V AC, Maximum
- . Temperature range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max.
- . Insulation resistance: 1000 MΩ min
- . Withstand Voltage: 1500V AC/minute

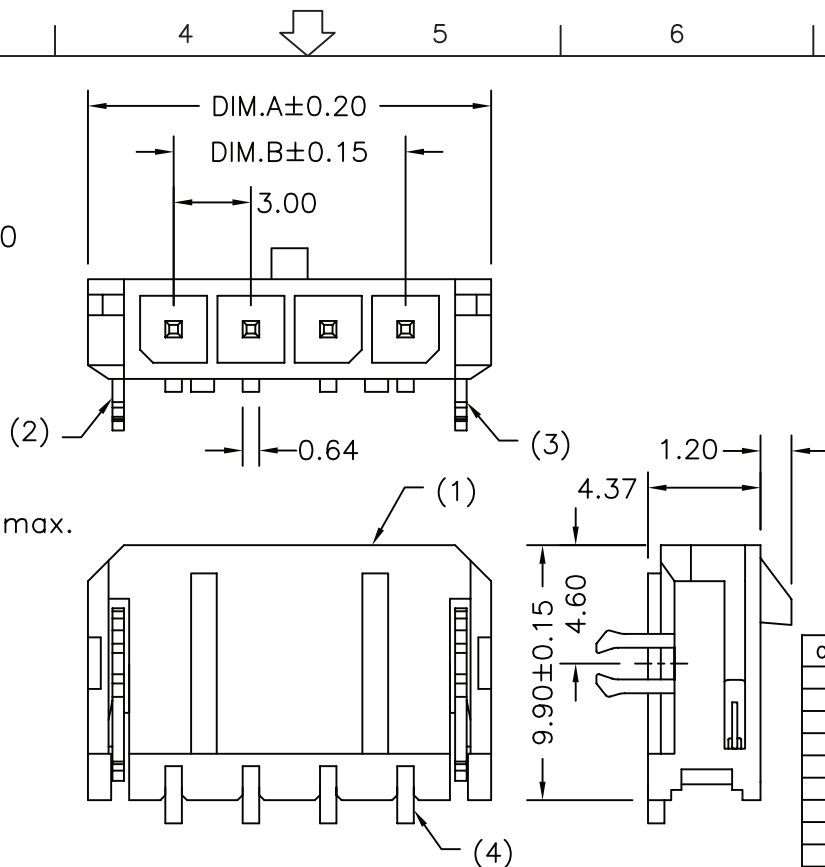

Circuits	Dim.A	Dim.B	Dim.C
2	9.65	3.00	7.30
3	12.65	6.00	10.30
4	15.65	9.00	13.30
5	18.65	12.00	16.30
6	21.65	15.00	19.30
7	24.65	18.00	22.30
8	27.65	21.00	25.30
9	30.65	24.00	28.30
10	33.65	27.00	31.30
11	36.65	30.00	34.30
12	39.65	33.00	37.30

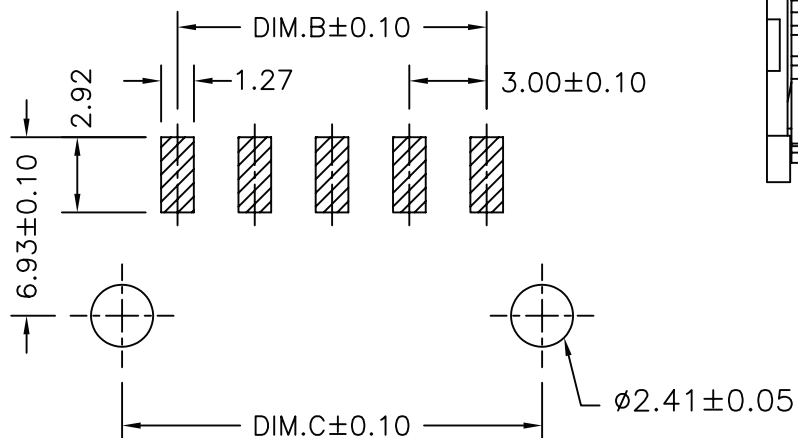

P.C.B. LAYOUT

Circuits	材料規格	敘述	數量
2	十二行真空盒	一行28PCS, 一盒336PCS	1/336
3	十二行真空盒	一行21PCS, 一盒252PCS	1/252
4	十二行真空盒	一行17PCS, 一盒204PCS	1/204
5	十二行真空盒	一行14PCS, 一盒168PCS	1/168
6	十二行真空盒	一行12PCS, 一盒144PCS	1/144
7	十二行真空盒	一行11PCS, 一盒132PCS	1/132
8	十二行真空盒	一行10PCS, 一盒120PCS	1/120
9	十二行真空盒	一行9PCS, 一盒108PCS	1/108
10	十二行真空盒	一行8PCS, 一盒96PCS	1/96
11	十二行真空盒	一行7PCS, 一盒84PCS	1/84
12	十二行真空盒	一行7PCS, 一盒84PCS	1/84

編號	材料規格	材質	電鍍	數量
(1)	13650-XXP-A	LCP(協佑17101BK)		1
(2)	13650-SN-4T-L-T-T-PB	黃銅 C2680 H級	100u"錫	1
(3)	13650-SN-4T-R-T-T-PB	黃銅 C2680 H級	100u"錫	1
(4)	13045-TR-S-SMT-T-T-PB-XX	黃銅 C2600 3/4H級	100u"錫	1
(5)	十二行真空盒(請參考上述表格)			
(6)	13650-XXP-T&R-R (一捲500PCS)			1/500

UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd.	
DECIMALS:	ANGLES:	TITLE	3.00mm Pitch, Micro Fit, R/A, SMT
X : ±0.5	X : ±2°	DWN	2006.01.13 PART NO. 2WB13650-XXPRT-B-SMT-PB
X.X : ±0.3	X.X : ±1°	CHKD	SCALE 1:1 UNIT: mm
X.XX : ±0.2		APVD	SIZE: A3 SHEET: 1 OF 1 REV: A
CUSTOMER COPY			