

2WB13650-XXPST-C-SMT-PB Series




FEATURES:

- 2-12 Circuits
- Housing: High temperature LCP, UL 94V-0
- Plating: Tin, select Gold
- Contact: Brass

SPECIFICATIONS:

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, Maximum
- Temperature range: -40°C ~ +105°C
- Contact resistance: Initial Value/10mΩ max.
- Insulation resistance: 1000 MΩ min
- Withstand Voltage: 1500V AC/minute

Circuits	Dim.A	Dim.B	Dim.D
2	9.65	3.00	14.20
3	12.65	6.00	17.20
4	15.65	9.00	20.20
5	18.65	12.00	23.20
6	21.65	15.00	26.20
7	24.65	18.00	29.20
8	27.65	21.00	32.20
9	30.65	24.00	35.20
10	33.65	27.00	38.20
11	36.65	30.00	41.20
12	39.65	33.00	44.20

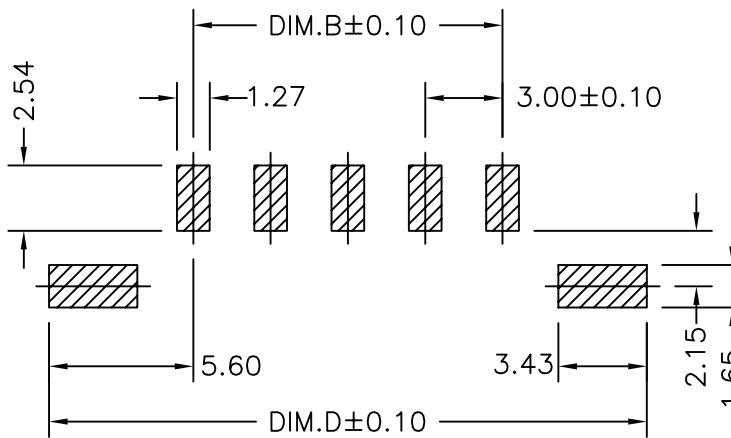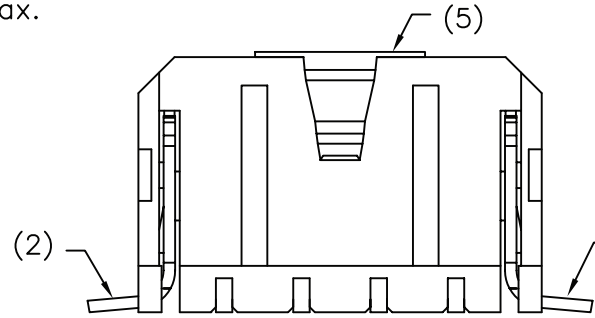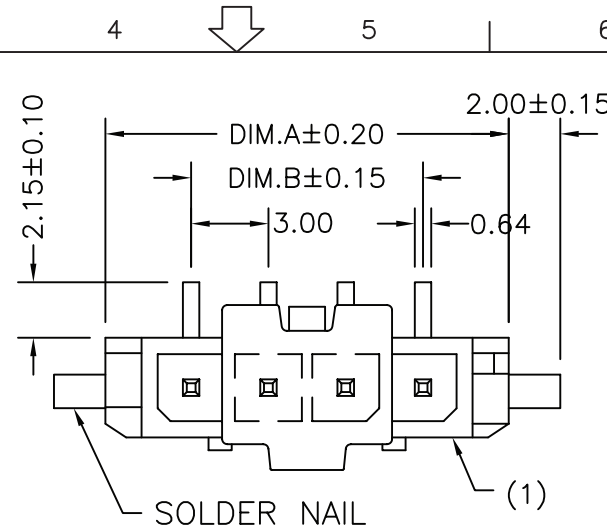

P.C.B. LAYOUT

編號	材料規格	材質	電鍍	數量
(1)	13650-XXP-A	LCP(協佑17101BK)		1
(2)	13650-SN-1T-L-TBS-T-PB	黃銅 C2680 H級	100u"錫	1
(3)	13650-SN-1T-R-TBS-T-PB	黃銅 C2680 H級	100u"錫	1
(4)	13045-TS-SMT-TBS-T-PB-XX	黃銅 C2600 3/4H級	100u"錫	1
(5)	13650-CAP-PB	黃銅 C2680 EH級		1
(6)	十二行真空盒上蓋			
(7)	十二行真空盒(請參考上述表格)			
(8)	13650-XXP-T&R-S-PB (一捲300PCS)			1/300

Circuits	材料規格	敘述	數量
2	十二行真空盒	一行28PCS, 一盒336PCS	1/336
3	十二行真空盒	一行21PCS, 一盒252PCS	1/252
4	十二行真空盒	一行17PCS, 一盒204PCS	1/204
5	十二行真空盒	一行14PCS, 一盒168PCS	1/168
6	十二行真空盒	一行12PCS, 一盒144PCS	1/144
7	十二行真空盒	一行11PCS, 一盒132PCS	1/132
8	十二行真空盒	一行10PCS, 一盒120PCS	1/120
9	十二行真空盒	一行9PCS, 一盒108PCS	1/108
10	十二行真空盒	一行8PCS, 一盒96PCS	1/96
11	十二行真空盒	一行7PCS, 一盒84PCS	1/84
12	十二行真空盒	一行7PCS, 一盒84PCS	1/84

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: X :±0.5
X.X :±0.3
X.XX :±0.2

ANGLES: X :±2°
X.X :±1°

Singatron Enterprise Co., Ltd.

TITLE: 3.00mm Pitch, Micro Fit, Vertical SMT

DWN: 2006.06.14 PART NO. 2WB13650-XXPST-C-SMT-PB

CHKD: SCALE 1:1 UNIT: mm

APVD: SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY