


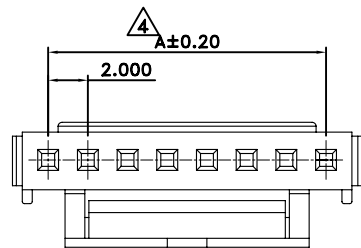
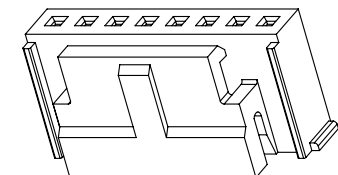
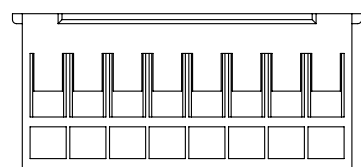

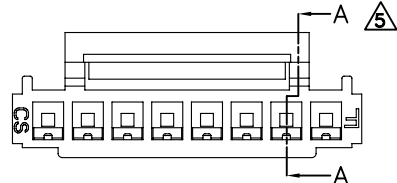


1 2 3 4 5 6 7 8

F
E
D
C
B
A



SECTION A-A

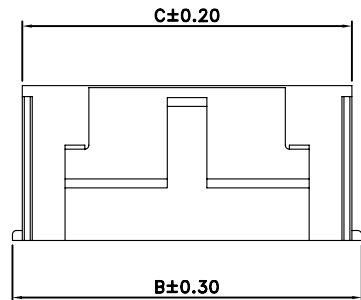

8PN 3D VIEW



SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 1000V AC/minute
- Insulation Resistance : 1000MΩ min
- Temperature Range : - 25°C to + 105°C
- Contact Resistance : 20mΩ max

HOUSING

- Part No. : 2WB2003-XX
- ① Poles : 2-16
- Material : Nylon66 UL94V-0
- Q' ty : 1,000 pcs./Bag

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2	2.0	5.6	4.6	10	18.0	21.6	20.6
3	4.0	7.6	6.6	11	20.0	23.6	22.6
4	6.0	9.6	8.6	12	22.0	25.6	24.6
5	8.0	11.6	10.6	13	24.0	27.6	26.6
6	10.0	13.6	12.6	14	26.0	29.6	28.6
7	12.0	15.6	14.6	15	28.0	31.6	30.6
8	14.0	17.6	16.6	16	30.0	33.6	32.6
9	16.0	19.6	18.6				

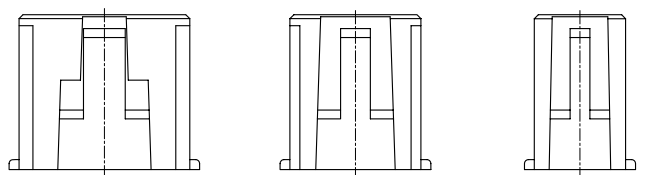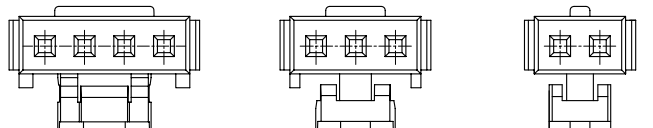

4~16Pin Circuit 3Pin Circuit 2Pin Circuit

TOLERANCE	LTR	REVISION RECORD	NAME	DATE	CUSTOMER			
.0	±0.30	△ ECR 200804-030	黃科源	2008/04/30	Conforms to The RoHS Instruction			
.00	±0.20	△ 4-5P改為雙卡勾	金 飛	2010/06/23				
.000	±0.10	△ ECR201101004	金 飛	2011/01/24				
ANGLE		△ 修改A尺寸公差，修改物性表	張逸維	2012/11/28				
0°	±1°	△ 修改SECTION A-A 剖面圖示	張逸維	2012/12/27				
.0°	±	△						
SHEET	1/1	△						

Singatron Enterprise Co., Ltd.

TITLE	2.00mm Crimp Style Housing Connector			
DWN	張逸維	PART NO. 2WB2003-XX		
CHKD	黃科源	SCALE 1:1	UNIT: mm	⊕ ↻
APVD	張育瑞	SIZE: A3	SHEET: 1 OF 1	REV: a5
CUSTOMER COPY				

1 2 3 4 5 6 7 8