
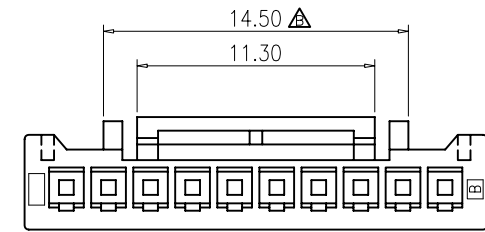






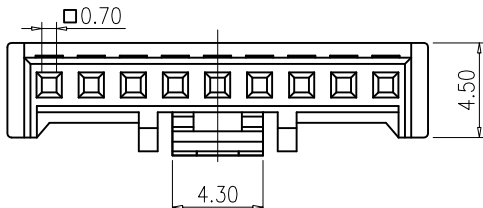
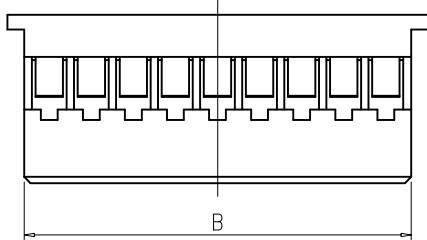


REV	ECN.NO.	REVISIONS	REV.DRAWN	DATE
A		初版发行	Yuqilong	07-12/06
B		增加尺寸标注	Yuqilong	2008/04/28
C		增加无卤料号说明	Yuqilong	2008/11/04
D		耐电压更正为800V	sunquan	2010/12/27

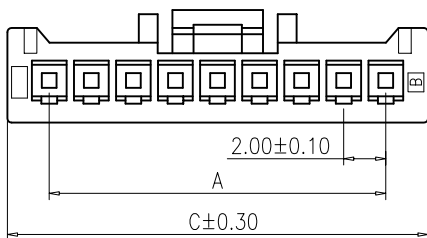

SPECIFICATIONS

- . Rated Voltage : 250V AC/DC
- . Rated Current : 3A AC/DC
- . Withstanding Voltage : 800V AC/minute
- . Insulation Resistance ; 500MΩ min
- . Temperature Range : -25°C to +85°C
- . Contact Resistance : 20mΩ max

HOUSING

- . Part No. : 2WB2007S-XX-HK-NH
- . Poles : 2~15
- . HK: Hook
- . NH: Halogen Free
- . Material: PA66 UL 94V-0 Color:nature
- . Q'ty : 1,000 pcs/Bag
- . Halogen free product identification LOGO on the packing

POLES	DIMENSION			POLES	DIMENSION		
	A	B	C		A	B	C
2	2.0	4.4	6.0	9	16.0	18.4	20.0
3	4.0	6.4	8.0	10	18.0	20.4	22.0
4	6.0	8.4	10.0	11	20.0	22.4	24.0
5	8.0	10.4	12.0	12	22.0	24.4	26.0
6	10.0	12.4	14.0	13	24.0	26.4	28.0
7	12.0	14.4	16.0	14	26.0	28.4	30.0
8	14.0	16.4	18.0	15	28.0	30.4	32.0

.X± 0.50	.X'± 5.00'
.X± 0.30	.X'± 2.00'
.XX± 0.20	.XX'± 1.00'
.XXX± 0.10	.XXX'± 0.50'

Singatron Enterprise Co., Ltd.			
TITLE	WIRE TO BOARD CONNECTOR		
DWN	Yuqilong 2007/11/04	PART NO. 2WB2007S-XX-HK-NH	
CHKD		SCALE 1:1	UNIT: mm
APVD	sunquan 2010/12/27	SIZE: A3	SHEET:1 OF 1 REV: D
CUSTOMER COPY			