
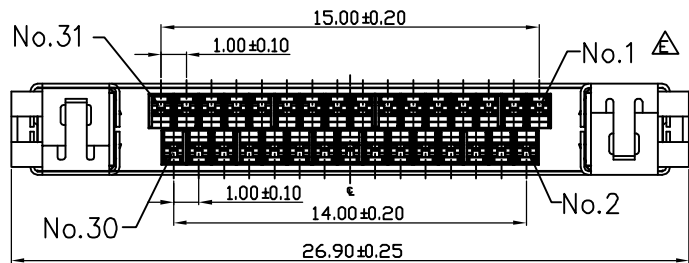
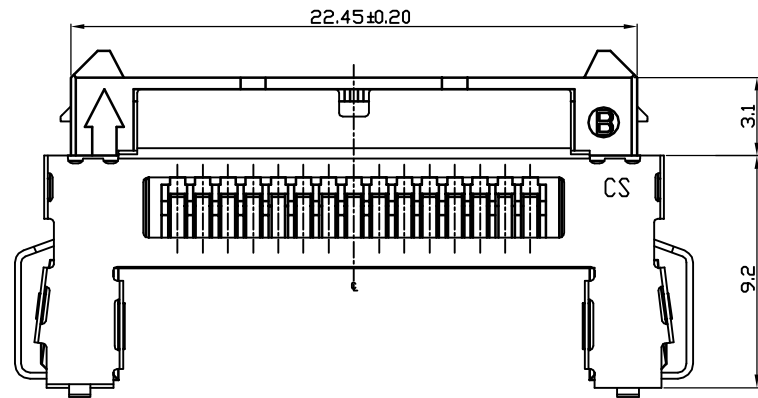
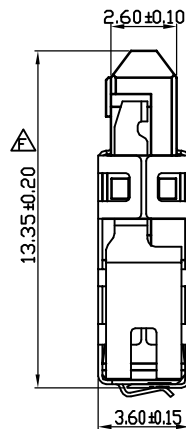
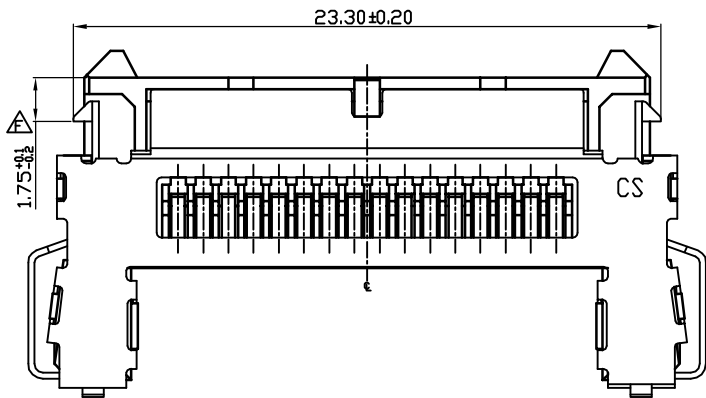


REV	ECN.NO.	REVISIONS	REV.DRAWN	DATE
C		更改包装规格	YU	06-11/27
D	07035	卡钩增加0.3X1.0倒角	Yuqilong	08-01/02
E		增加第一PIN位置描述	Yuqilong	2008-11-26
F	09064	13.20改13.35	hejihuai	2009/05/13

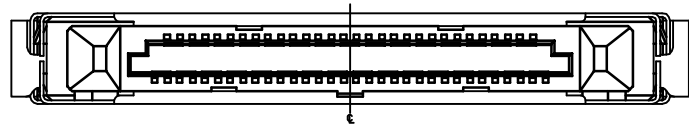

#### SPECIFICATION

- . Voltage Rating : 100V AC/DC
- . Current Rating : 0.5A AC/DC
- . Withstanding Voltage : 300V AC/Minute
- . Insulation Resistance : 500M $\Omega$  Min.
- . Temperature Range : -40°C~+85°C
- . Contact Resistance : 60m $\Omega$  Max.

#### NOTES:

1. Material: Base: Thermoplastic, UL94V-0  
Shell: Stainless Steel  
Contact Ear: Stainless Steel

2. Color: Black
3. Q'ty : 100 Pcs/Box
4. Part No.

2WB2015-31-XXXX-XX

Blank: Normal  
NH: Halogen Free  
Blank: Black  
Blank: PA46  
D7: PA66  
Pole: 31

Singatron Enterprise Co., Ltd.

X.± 0.50	X*.± 5.0°
.X± 0.30	.X*.± 2.0°
.XX± 0.20	.XX*.± 1.0°
.XXX± 0.10	.XXX*.± 0.5°

TITLE	1.00 mm Crimp Style Connector		
DWN		PART NO. 2WB2015-31-XXXX-XX	
CHKD	XUWEI 08-05/13	SCALE 1:1	UNIT: mm
APVD	HEJIHUI 08-05/13	SIZE: A3	SHEET: 1 OF 1
CUSTOMER COPY			
		REV:	F