
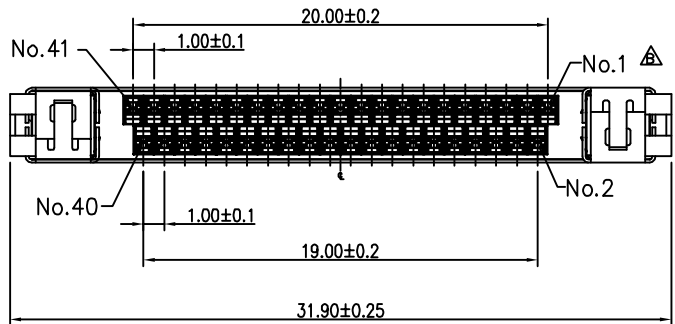
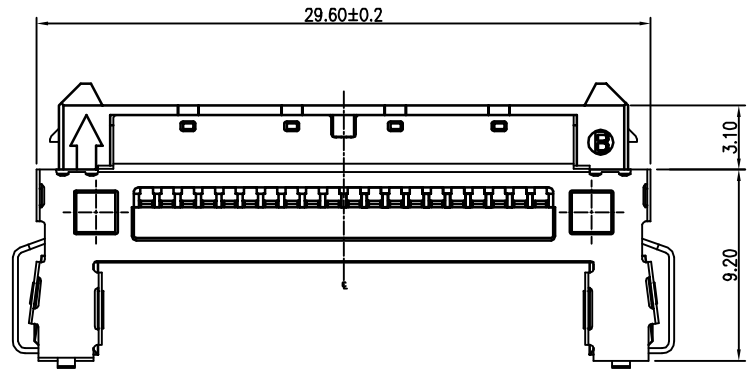
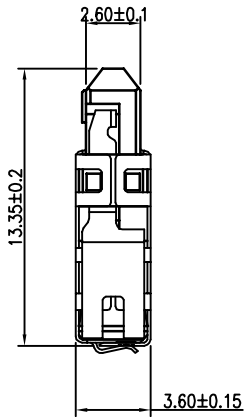
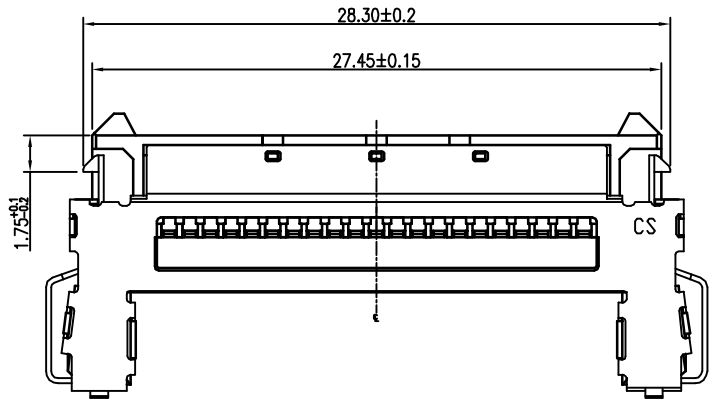


REV	ECN.NO.	REVISIONS	REV.DRAWN	DATE
A		初版发行	Yuqilong	07-01/02
B		增加第一PIN位置描述	Yuqilong	2008-11-28
C	09064	13.20改13.35	hejihuai	09-05/13



SPECIFICATION
· Voltage Rating : 100V AC/DC
· Current Rating : 0.5A AC/DC
· Withstanding Voltage : 300V AC/Minute
· Insulation Resistance : 500M Ω Min.
· Temperature Range : -40 $^{\circ}$ C~+85 $^{\circ}$ C
· Contact Resistance : 60m Ω Max.

NOTES:
1. Material: Base: Thermoplastic, UL94V-0
Shell: Stainless Steel
Contact Ear: Stainless Steel
2. Color: Black
3. Q'ty : 50 Pcs/Box
4. Part No.
2WB2015-41-XXXX-XX
Blank: Normal
NH: Halogen Free
Blank: Black
Blank: PA46
D7: PA66
Pole: 41

Singatron Enterprise Co., Ltd.

X.± 0.50	X*± 5.00*
.X± 0.30	.X*± 2.00*
.XX± 0.20	.XX*± 1.00*
.XXX± 0.10	.XXX*± 0.50*

TITLE	1.00 mm Crimp Style Connector			
DWN	XUWEI 09-05/13	PART NO.	2WB2015-41-XXXX-XX	
CHKD	HEJIHUI 09-05/13	SCALE 1:1	UNIT: mm	
APVD		SIZE: A3	SHEET: 1 OF 1	REV: c

CUSTOMER COPY