
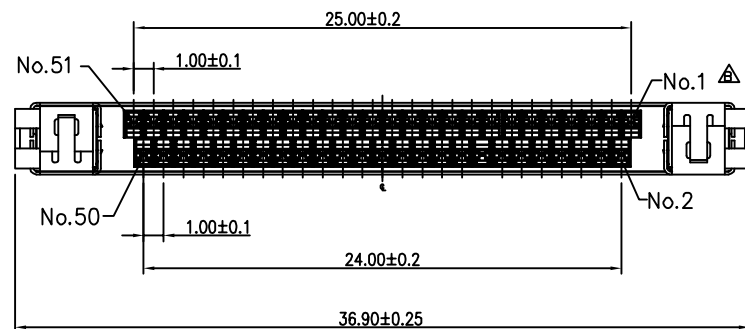
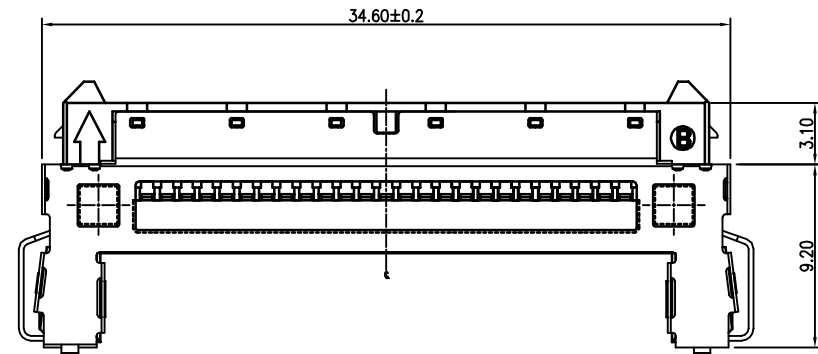
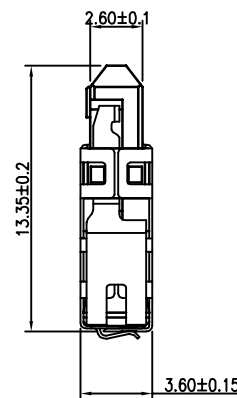
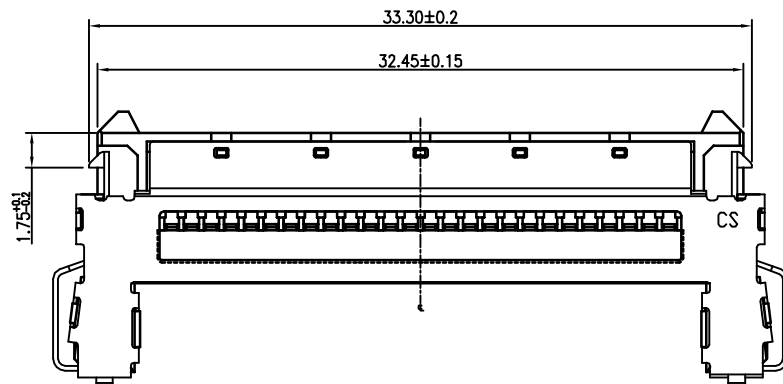


REV	ECN.NO.	REVISIONS	REV.DRAWN	DATE
A		初版发行	Yuqilong	08-01/0
B		增加第一PIN位置描述	Yuqilong	2008-11-
C	09064	13.20改13.35	hejihuai	09-05/



**SPECIFICATION**  
 • Voltage Rating : 100V AC/DC  
 • Current Rating : 0.5A AC/DC  
 • Withstanding Voltage : 300V AC/Minute  
 • Insulation Resistance : 500M $\Omega$  Min.  
 • Temperature Range : -40 $^{\circ}$ C~+85 $^{\circ}$ C  
 • Contact Resistance : 60m $\Omega$  Max.

**NOTES:**  
 1. Material: Base: Thermoplastic, UL94V-0  
 Shell: Stainless Steel  
 Contact Ear: Stainless Steel  
 2. Color: Black  
 3. Q'ty : 50 Pcs/Box  
 4. Part No.  
 2WB2015-51-XXXX-XX  
 Blank: Normal  
 NH: Halogen Free  
 Blank: Black  
 Blank: PA46  
 D7: PA66  
 Pole: 51

Singatron Enterprise Co., Ltd.

X.± 0.50	X*± 5.00*
.X± 0.30	.X*± 2.00*
.XX± 0.20	.XX*± 1.00*
.XXX± 0.10	.XXX*± 0.50*

TITLE	1.00 mm Crimp Style Connector			
DWN	XUWEI 09-06/13	PART NO.	2WB2015-51-XXXX-XX	
CHKD	HEJIHUI 09-06/13	SCALE 1:1	UNIT: mm	
APVD		SIZE: A3	SHEET: 1 OF 1	REV: c

CUSTOMER COPY