


20PIN 3D VIEW

■ SPECIFICATIONS


- Current Rating : 3.0A AC/DC
- Withstanding Voltage : 1,000V AC/minute
- Insulation Resistance : 1,000MΩ min.
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20mΩ max.

■ HOUSING



- Part No. : 2WB2017-XXx2
- Poles : 4x2~20x2
- Material : Nylon 66 UL94V-0 Color : White
- Applicable Terminal : 2WT2017-XXT
- Mates With : 2WB2018-XXX2 OR 2WB2018R-XXX2
- Q'ty: 1,000 Pcs/Bag

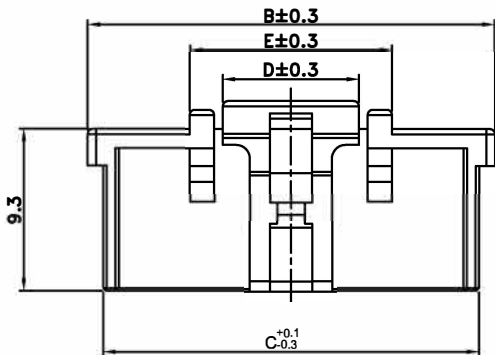


6X2~20X2 PIN



4X2~5X2 PIN

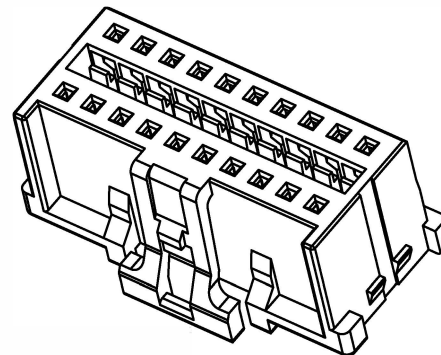


6X2~20X2 3D VIEW

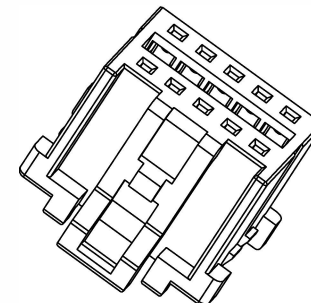

4X2~5X2 3D VIEW

Poles	Dimension(mm)				
	A	B	C	D	E
4x2	6.0	11.4	9.6	4.7	8.4
5x2	8.0	13.4	11.6	4.7	8.4
6x2	10.0	15.4	13.6	7.8	11.6
7x2	12.0	17.4	15.6	7.8	11.6
8x2	14.0	19.4	17.6	7.8	11.6
9x2	16.0	21.4	19.6	7.8	11.6
10x2	18.0	23.4	21.6	7.8	11.6
11x2	20.0	25.4	23.6	7.8	11.6
12x2	22.0	27.4	25.6	7.8	11.6
13x2	24.0	29.4	27.6	7.8	11.6
14x2	26.0	31.4	29.6	7.8	11.6
15x2	28.0	33.4	31.6	7.8	11.6
16x2	30.0	35.4	33.6	7.8	11.6
17x2	32.0	37.4	35.6	7.8	11.6
18x2	34.0	39.4	37.6	7.8	11.6
19x2	36.0	41.4	39.6	7.8	11.6
20x2	38.0	43.4	41.6	7.8	11.6

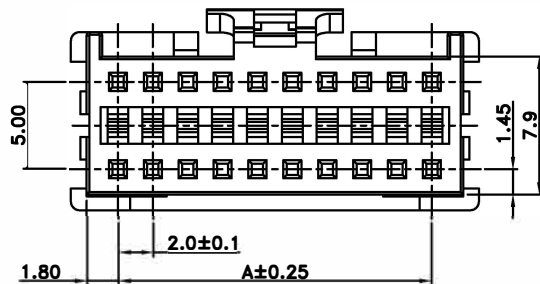

TOLERANCE	LTR	REVISION RECORD	NAME	DATE
.0	±0.3	增加3D圖&尺寸標註變更	林豐盛	11/03/29
.00	±0.2	增加4X2-5X2 圖示及修正CS&模穴號位置	周家慶	18/01/25
.000	±0.1			
ANGLE				
0°	±1°			
.0°	±			
SHEET	1/1			

Singatron Enterprise Co., Ltd.

TITLE	2.0mm W-+-B Connectors Housing			
DWN	周家慶	PART NO. 2WB2017-XXX2		
CHKD	簡子欽	SCALE 1:1	UNIT: mm	⊕ ⊖
APVD	張育瑞	SIZE: A3	SHEET: 1 OF 1	REV: a2

CUSTOMER COPY