
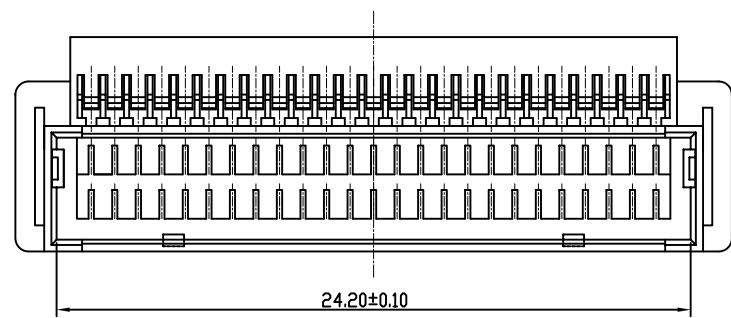
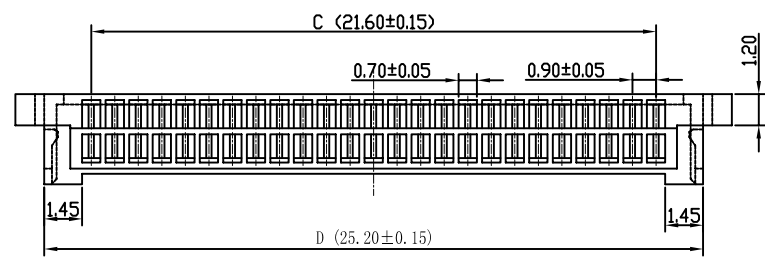

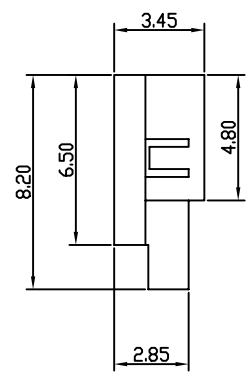


REV	ECN.NO.	REVISIONS	REV.DRAWN	DATE
A		初版发行	YU	06-11/09
B		增加40P规格	sunquan	13-03/25

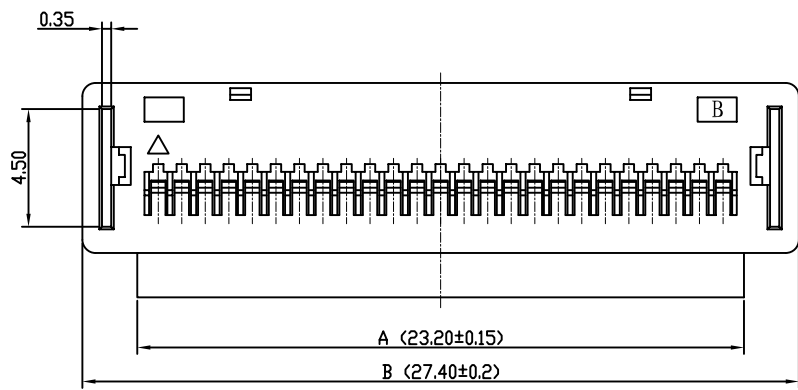

SPECIFICATIONS:

- . Voltage Rating: 80V AC
- . Current Rating: 1.0A
- . Withstanding Voltage: AC 250V/minute
- . Insulation Resistance: 500MΩ MIN
- . Contact Resistance: 30mΩ MAX
- . Temperature Range: -35°C to 85°C

HOUSING

- . Part No Legend: 2WB2453-XX
- . Poles: 40,50
- . Material: PA46 UL 94V-0
- . Q'ty: 1,000pcs/Bag

Poles	A	B	C	D
2WB2453-40	18.70	22.90	17.10	20.70
2WB2453-50	23.20	27.40	21.60	25.20

Singatron Enterprise Co., Ltd.

X.± 0.50	X'.± 3.0'	TITLE	0.9PITCH WIRE TO BOARD CONNECTOR		
.X± 0.30	.X'.± 2.0'	DWN	YU	PART NO. 2WB2453-XX	
.XX± 0.15	.XX'.± 1.0'	CHKD	06-11/09	SCALE 1:1	UNIT: mm
.XXX± 0.05	.XXX'.± 0.5'	APVD	liuzhiwen	SIZE: A3	SHEET: 1 OF 1
CUSTOMER COPY					
			REV: B		

符合环境管理物质