



1 2 3 4 5 6 7 8

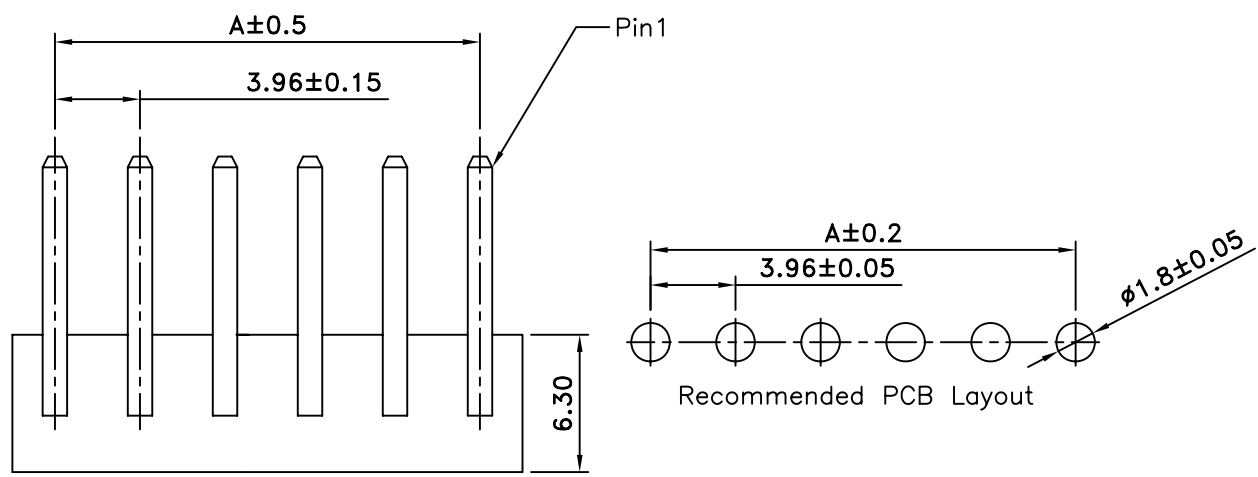

- SPECIFICATIONS**
- Voltage Rating : 250 V AC/DC
 - Current Rating : 7A AC/DC
 - Withstanding Voltage : 1,500V AC/minute
 - Insulation Resistance : 1,000MΩ min
 - Temperature Range : - 25°C to + 85°C
 - Contact Resistance : 20mΩ max

- WAFER**
- Part No. : 2WB 4003R-XXX (Right Angle)
 - Poles : 2 - 14
 - Material : Contact : Brass, Tin Plated
Base : Nylon 66 UL94V-2
 - Q' ty : 1,000 pcs./Bag

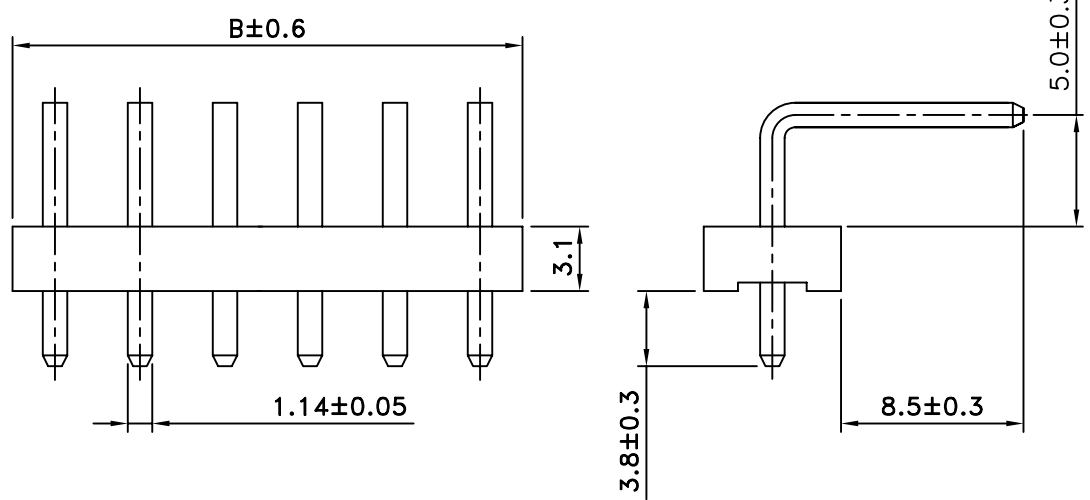

Poles	Dimensions(mm)	
	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44

TOLERANCE	LTR	REVISION RECORD	NAME	DATE		
.0	±0.30	▲ RoHS Compliant	XXX	2006/04/01		
.00	±0.20	▲ 套新圖框，修正電壓電流，刪GP	張逸維	2006/11/24		
.000	±0.10	▲				
ANGLE		▲			CUSTOMER	
0°	±1°	▲				
.0°	±	▲				
SHEET	1/1	▲			Conforms to The RoHS Instruction	

Singatron Enterprise Co., Ltd.				
TITLE	3.96mm Crimp Style Connectors Wafer			
DWN	張逸維	PART NO. 2WB 4003R-XXX		
CHKD	黃科源	SCALE 1:1	UNIT: mm	☉
APVD	張育瑞	SIZE: A3	SHEET: 1 OF 1	REV: a2
CUSTOMER COPY				

1 2 3 4 5 6 7 8