

1 2 3 4 5 6 7 8

F


E

D






C

B

A

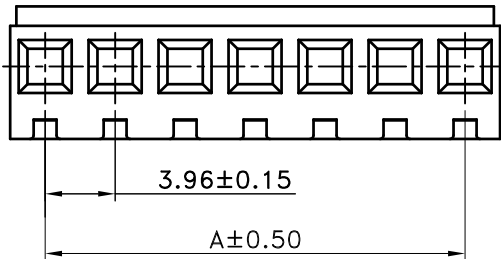

Poles	Dimensions(mm)	
	A	B
2	3.96	8.92
3	7.92	12.88
4	11.88	16.84
5	15.84	20.80
6	19.80	24.76
7	23.76	28.72
8	27.72	32.68
9	31.68	36.64
10	35.64	40.60
11	39.60	44.56
12	43.56	48.52
13	47.52	52.48
14	51.48	56.44
15	55.44	60.40
16	59.40	64.36

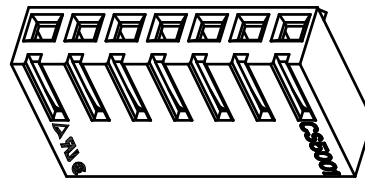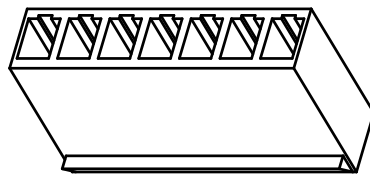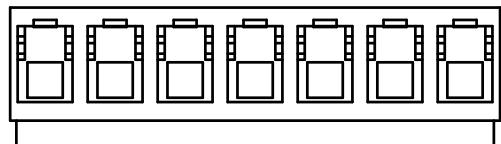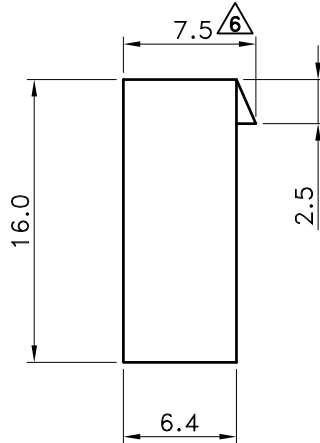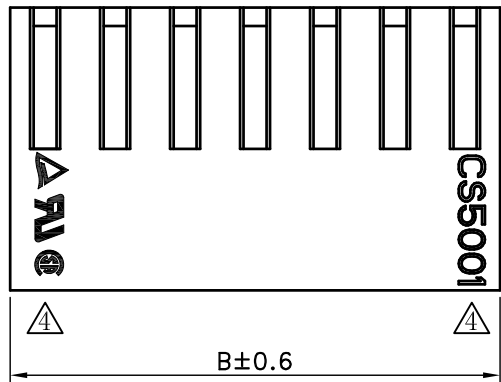

3D VIEW ④

■ SPECIFICATIONS

- Rated Voltage : 250 V AC/DC ⑤
- Current Rating : 7A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 1,000MΩ min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20mΩ max


■ HOUSING

- Part No. : 2WB5001-XX XX ⑤
① ②

Code No.

- ① Poles:2-16 ⑤
- ② Color: Blank: Natural ⑦
BK: Black

- Material : Nylon 66 UL94V-2
- Package : Bag

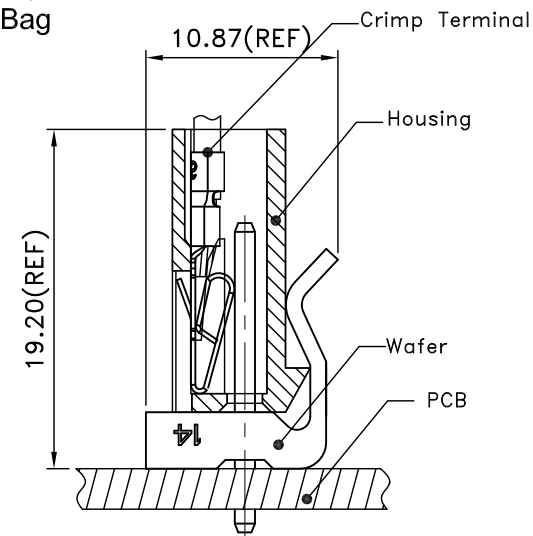

ASSEMBLE (REF) ④

TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
.0	±0.30	④ 增加三角標識	余秀麗	2005/05/15	⑧			
.00	±0.20	④ 增加CS5001和UL TUV標識	金飛	2011/01/20	⑨			
.000	±0.10	④ 修正耐電流電壓,同時增加至16PIN	周家慶	2011/05/12	⑩			
ANGLE		④ 整理圖面,增加3D圖面	Jacky	2012/06/06	CUSTOMER			
0°	±1°	④ 修正料號選項,物性表Poles數修正	吳弘文	2012/07/04				
.0°	±	④ 修正尺寸,由7.8改為7.5	周南平	2012/09/18				
SHEET	1/1	④ 增加BK顏色選項	曾慶根	2019/04/12	Conforms to The RoHS Instruction			

Singatron Enterprise Co., Ltd.

TITLE	3.96mm Crimp Style Connectors Housing		
DWN	曾慶根	PART NO.	2WB5001-XX
CHKD	2019/04/12	SCALE	1:1 UNIT: mm
APVD	施威光	SIZE: A3	SHEET: 1 OF 1 REV: a7

CUSTOMER COPY

1 2 3 4 5 6 7 8