

FEATURES:

- . 02~20 Circuits
- . .0197" [0.50mm] square wire pins
- . Nylon, [UL 94V-0]
- . Accepts double cantilever crimp terminal
- . Mates with 2WB6000 series wafers polarized

SPECIFICATIONS:


- . Current rating: 2A AC. DC
- . Voltage rating: 250V AC. Maximum
- . Temperature range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max.
After environmental testing
/20mΩ max.
- . Insulation resistance: 1000 MΩ min
- . Withstand Voltage: 1500V AC/minute
- . Applicable wires: AWG #30 ~ #22

PIN數	DIM.A	DIM.B
02	2.0	5.80
03	4.0	7.80
04	6.0	9.80
05	8.0	11.80
06	10.0	13.80
07	12.0	15.80
08	14.0	17.80
09	16.0	19.80
10	18.0	21.80
11	20.0	23.80

PIN數	DIM.A	DIM.B
12	22.0	25.80
13	24.0	27.80
14	26.0	29.80
15	28.0	31.80
16	30.0	33.80
17	32.0	35.80
18	34.0	37.80
19	36.0	39.80
20	38.0	41.80

Ordering Information

Series No.	No. of Contacts	Color	
2WB6000	04P	-	A
2WB6000	02P ~ 20P	: White BK: Black	RoHs

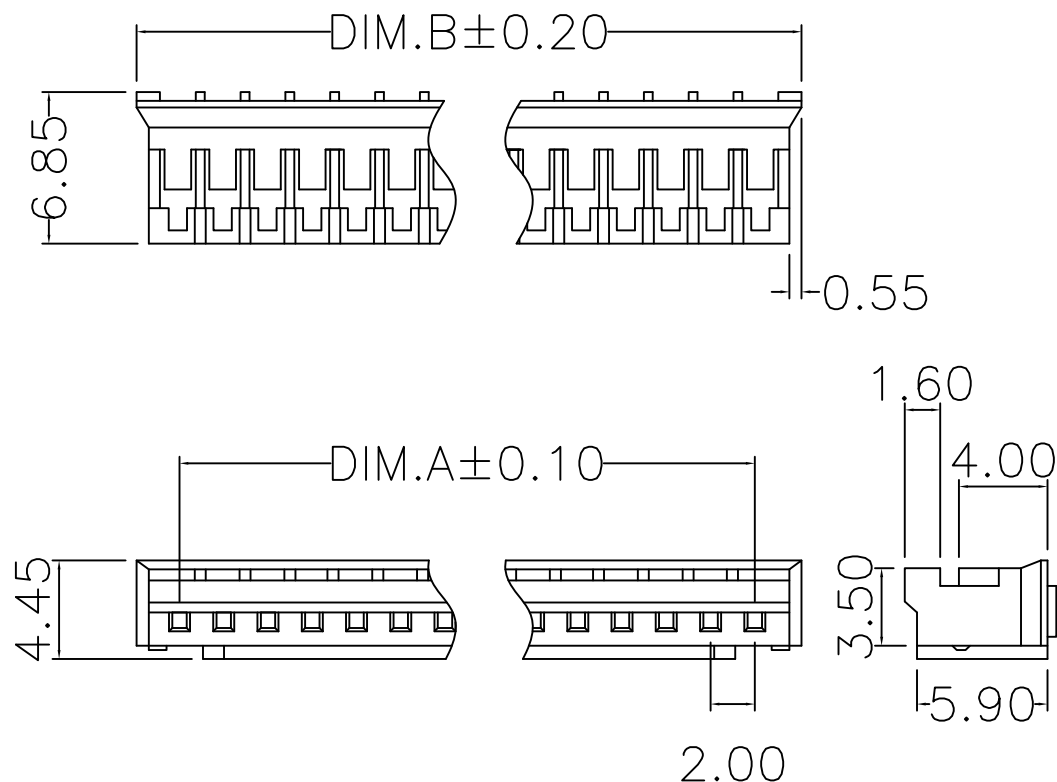

RoHS compliant

TOLERANCE
X.X = ±.20
X.XX = ±.10
X.XXX = ±.05

Singatron Enterprise Co., Ltd.

TITLE	.079" (2.00mm) Center Crimp Terminal Housing		
DWN	PART NO. 2WB6000-xxP-A		
CHKD	2007.12.07	SCALE 1:1	UNIT: mm
APVD		SIZE: A3	SHEET: 1 OF 1

CUSTOMER COPY

版本	ECR編號	修改內容
----	-------	------