


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A		PDR RELEASE	Even	2019.08.26

Ordering code



- ZWBA0800** WW-S-XP XXX
- ① Series No.
 - ② Connector type: WW=Vertical
 - ③ Mounting type: S=Snit without boss
 - ④ No. of circuits
 - ⑤ Data code:
 - 3enK=Contacts/Matte Tin-palae crn
 - Soeer tabs/Matte Tin-palae
 - DD1=Contacts/Gold-flash crn
 - Socder tabs/Goc-flash

SPECIFICATIONS



Current Rating: 0.5A AC/DC
Voltage Rating: 30V AC/DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 200V AC/minute
Pin Material: Phosphor Bronze/
Matte Tin-plated/
Solder Tabs: Phosphor Bronze/
Matte Tin-plated/
Material: Nylon 6T,UL94V-0
Crt: Nylon 6T,UL94V-0,Natural(Beige)
Color: Natural(Beige)



(TOP PICK AND PLACE SYSTEMS)

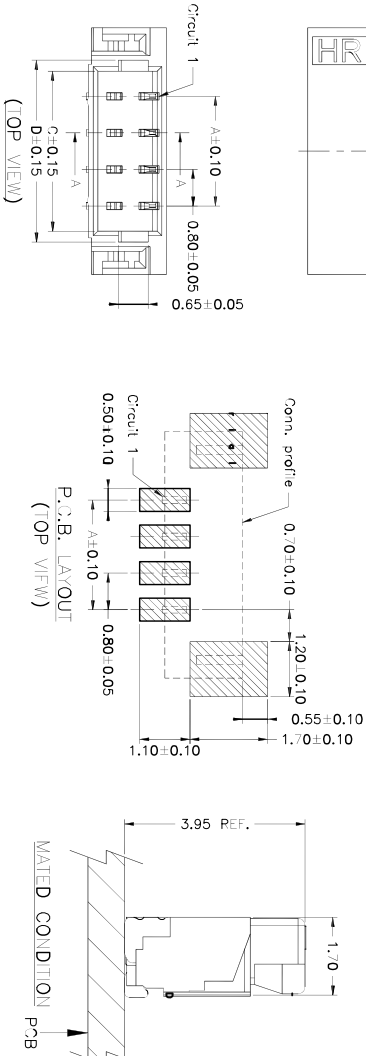

Circuit No.	Dimensions			
	A	B	C	D
02P	0.80	3.80	1.90	2.38
03P	1.60	4.60	2.70	3.18
04P	2.40	5.40	3.50	3.98
05P	3.20	6.20	4.30	4.78
06P	4.00	7.00	5.10	5.58
07P	4.80	7.80	5.90	6.38
08P	5.60	8.60	6.70	7.18
10P	7.20	10.20	8.30	8.78
12P	8.80	11.80	9.90	10.38
14P	10.40	13.40	11.50	11.98
15P	11.20	14.20	12.30	12.78
16P	12.00	15.00	13.10	13.58
17P	12.80	15.80	13.90	14.38
20P	15.20	18.20	16.30	16.78

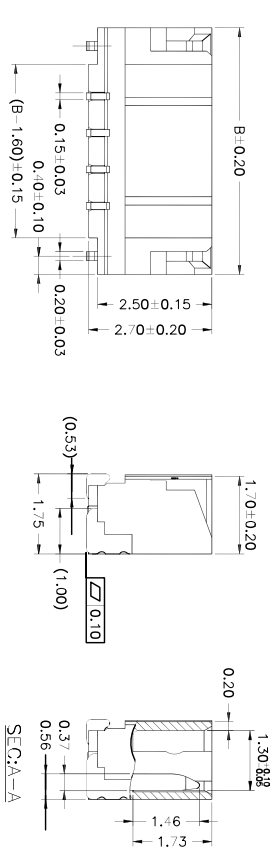

- SPECIFICATIONS:**
1. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 2. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GREEN PASS**
 3. PACKAGE: SEE "ZWBA0800W-S-03P" PACKAGE.
 4. OTHER GENERAL SPEC. TO REFER "ZWBA0800W-S-03P SPEC."

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
XX	:±0.25	XX	:±1°	
XXX	:±0.15			
XXX	:±0.05			
TITLE	0.8mm PITCH 180° WATER-SM1 TYPE			
DWN	REV: 2019.08.26			
CHKD	SCALE: 1/1 UNIT: mm			
APVD	SIZE: A3 SHEET: 1 OF 1 REV: A			
CUSTOMER COPY				

Singatron Enterprise Co., Ltd.
信晉企業股份有限公司