
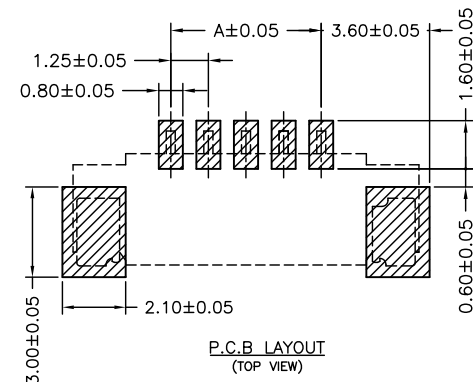


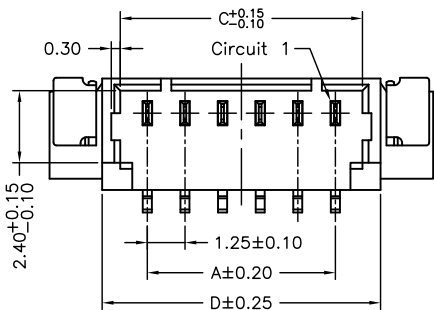
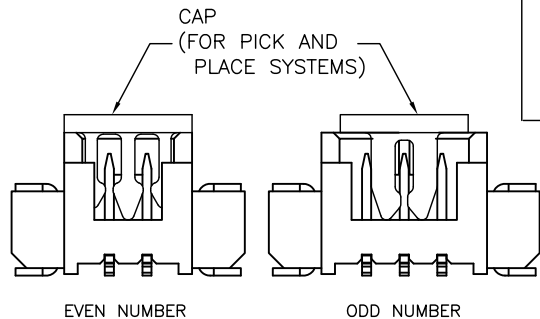




P/N LEGEND

<b>2</b>	<b>W</b>	<b>S</b>	<b>X</b>	<b>N</b>	<b>X</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>00</b>	<b>X</b>
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪
① Series No.	② Connector type: WV=Vertical	③ Mounting type: S=SMT	④ No. of circuits	⑤ N=Halogen Free	⑥ Material: 6=Nylon 6T, L=LCP	⑦ Color: B=Black N=Natural	⑧ Plating code: T1=Tin-plated, G1=Gold-flash S4=Gold-plated 10u"on contact area, Gold-flash on solder area	⑨ Plating code: T=Tin-plated, G=Gold-flash	⑩ Option code: 00=Standard	⑪ Packing code: R=Tape & Reel L=Tape & Reel(With Cap)

**SPECIFICATIONS**  
 Current Rating: 1A AC,DC  
 Voltage Rating: 125V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 100MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Pin Material: Phosphor Bronze  
 Solder Tabs: Phosphor Bronze  
 Cap: Nylon 6T,UL94V-0,Black(Beige)

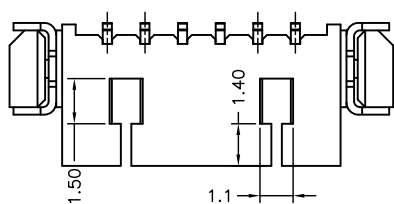


Circuit No.	Dimensions				
	A	B	C	D	E
02P	1.25	7.75	3.05	4.25	7.50
03P	2.50	9.00	4.30	5.50	8.75
04P	3.75	10.25	5.55	6.75	10.00
05P	5.00	11.50	6.80	8.00	11.25
06P	6.25	12.75	8.05	9.25	12.50
07P	7.50	14.00	9.30	10.50	13.75
08P	8.75	15.25	10.55	11.75	15.00
09P	10.00	16.50	11.80	13.00	16.25
10P	11.25	17.75	13.05	14.25	17.50
11P	12.50	19.00	14.30	15.50	18.75
12P	13.75	20.25	15.55	16.75	20.00
13P	15.00	21.50	16.80	18.00	21.25
14P	16.25	22.75	18.05	19.25	22.50
15P	17.50	24.00	19.30	20.50	23.75
16P	18.75	25.25	20.55	21.75	25.00
17P	20.00	26.50	21.80	23.00	26.25
18P	21.25	27.75	23.05	24.25	27.50

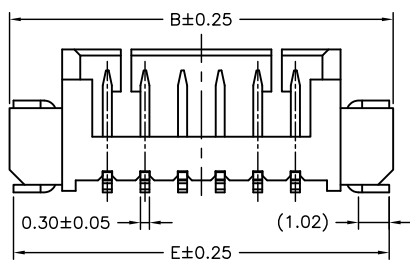





A2	EN1411100001	2014. 11. 10	劉建芳	GENERAL TOLERANCE	
A1	EN1301240032	2013. 01. 24	周傑亮	X. X±0. 25	ANGLE±
A0	NEW RELEASE	2012. 10. 18	周傑亮	X. XX±0. 15	
REV.	DESCRIPTION	DATE	NAME	X. XXX±0. 05	

Singatron Enterprise Co., Ltd.					
TITLE	1.25mm PITCH 180° WAFER-SMT TYPE				
DWN	周傑亮	PART NO.	2WBA1250WV-S-XPNXXXXX00X		
CHKD	2012.10.18	SCALE	1:1	UNIT:	mm
APVD	董正一	SIZE:	A3	SHEET:	1 of 2
<b>REV: A2</b>					
<b>CUSTOMER COPY</b>					

02~09 Contacts

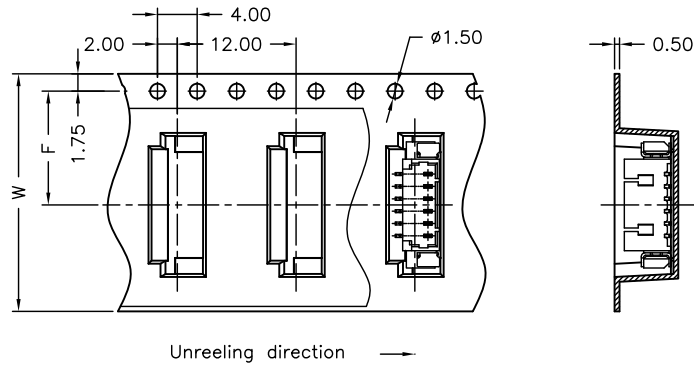

10~18 Contacts

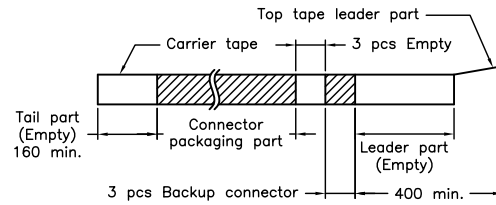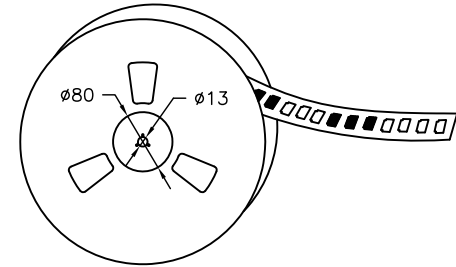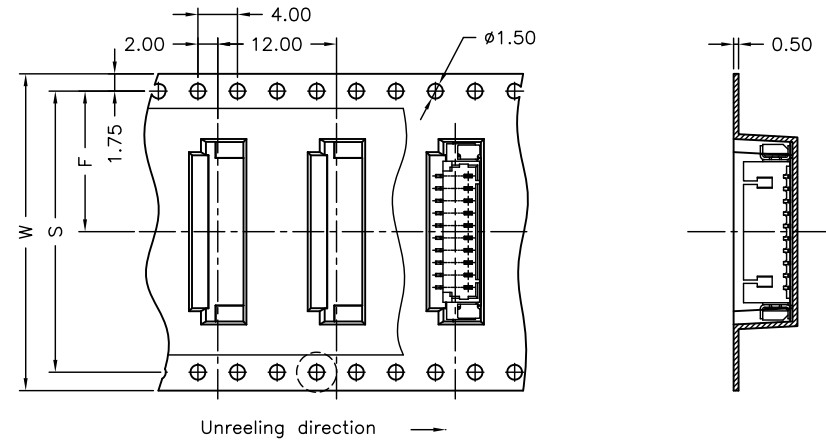

NOTE:  
Material: Transparent  
Anti-static Polystyrene.

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel
02P	16	7.50	/	1,000
03P	24	11.50		1,000
04P	24	11.50		1,000
05P	24	11.50		1,000
06P	24	11.50		1,000
07P	24	11.50		1,000
08P	24	11.50		1,000
09P	24	11.50		1,000
10P	32	14.20		28.40
11P	32	14.20	28.40	1,000
12P	44	20.20	40.40	1,000
13P	44	20.20	40.40	1,000
14P	44	20.20	40.40	1,000
15P	44	20.20	40.40	1,000
16P	44	20.20	40.40	1,000
17P	44	20.20	40.40	1,000
18P	44	20.20	40.40	1,000

REV.	DESCRIPTION	DATE	NAME	GENERAL TOLERANCE	ANGLE±
A2	EN1411100001	2014. 11. 10	劉建芳	X. XX±0. 25 X. XX±0. 15 X. XXX±0. 05	
A1	EN1301240032	2013. 01. 24	周傑亮		
A0	NEW RELEASE	2012. 10. 18	周傑亮		

Singatron Enterprise Co., Ltd.				
TITLE	1. 25mm PITCH 180° WAFER-SMT TYPE, DUAL ROW, TAPING SPEC.			
DWN	周傑亮	PART NO.	2WBA1250WV-S-XPNXXXXX00X	
CHKD	2012. 10. 18	SCALE	1:1	UNIT: mm
APVD	董正一	SIZE: A3	SHEET: 2 of 2	REV: A2
<b>CUSTOMER COPY</b>				