


SEC. 1:1.25

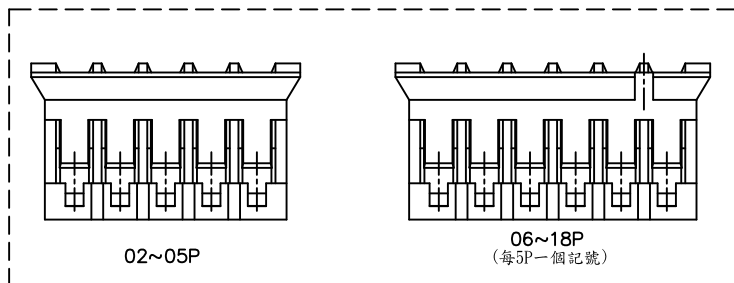

P/N LEGEND

<u>2WBA2001</u>	<u>H</u>	<u>X</u>	<u>P</u>	<u>N</u>	<u>0</u>	<u>X</u>	<u>NP</u>	<u>N</u>	<u>00</u>	<u>G</u>
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	
① Series No.										
② Connector type: H=Housing										
③ No. of circuits										
④ N=Halogen Free										
⑤ Material: 0=Nylon 66-V0										
⑥ Color: W=White; B=Black										
⑦ Plating code: NP=Non-plating										
⑧ Plating code: N=Non-plating										
⑨ Option code: 00=Standard										
⑩ Packing code: G=Bag										

SPECIFICATIONS

Current Rating: 2A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Circuit No.	Dimensions			
	A	B	C	D
02P	2.00	5.80	0.50	4.60
03P	4.00	7.80	1.68	6.60
04P	6.00	9.80	3.50	8.60
05P	8.00	11.80	5.50	10.60
06P	10.00	13.80	7.50	12.60
07P	12.00	15.80	9.50	14.60
08P	14.00	17.80	11.50	16.60
09P	16.00	19.80	13.50	18.60
10P	18.00	21.80	15.50	20.60
11P	20.00	23.80	17.50	22.60
12P	22.00	25.80	19.50	24.60
13P	24.00	27.80	21.50	26.60
14P	26.00	29.80	23.50	28.60
15P	28.00	31.80	25.50	30.60
16P	30.00	33.80	27.50	32.60
17P	32.00	35.80	29.50	34.60
18P	34.00	37.80	31.50	36.60

Singatron Enterprise Co., Ltd.

TITLE	2.00mm PITCH HOUSING			
DWN	陳敏	PART NO.	2WBA2001H-XPNNXXXXXXX	
CHKD	2011.06.28	SCALE 1:1	UNIT: mm	④ ⑤
APVD	董正一	SIZE: A3	SHEET: 1 OF 1	REV: A1

CUSTOMER COPY

REV.	DESCRIPTION	DATE	NAME	GENERAL TOLERANCE	ANGLE±
A1	EN20220216955	2022.02.16	徐青湖	X. X±0.25	ANGLE±
A0	NEW RELEASE	2011.06.28	陳敏	X. XX±0.15	
				X. XXX±0.05	