



0.75  
02P

Ordering code



2WBA2001WV-XP N 0 X T1 N K0 G  
 ① No. of circuits ① ② ③ ④ ⑤ ⑥ ⑦ ⑧  
 ② N=Halogen Free  
 ③ Material: 0=Nylon 66-V0  
 ④ Color: W=White, B=Black  
 ⑤ Plating code for contacts: T1=Tin-plated  
 ⑥ Plating code: N=Non-plating  
 ⑦ Option code:  
 K0=With pin kink  
 ⑧ Packing code: G=Bag

SPECIFICATIONS



Current Rating: 2A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Temperature Storage: -20°C ~ +80°C  
 Contact Resistance: 10mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage: 800V AC/minute

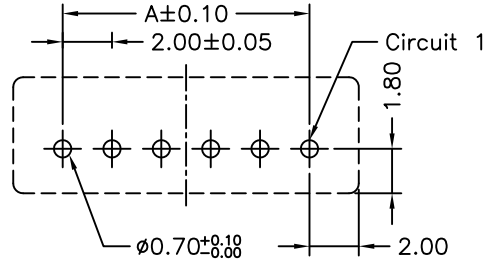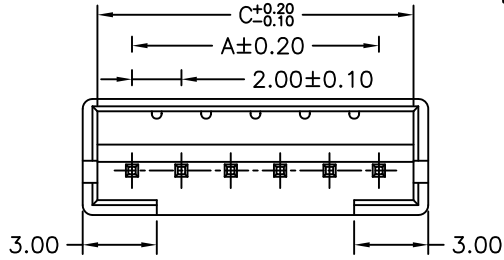

P.C.B LAYOUT(TOP VIEW)

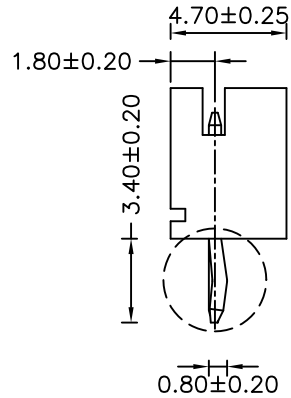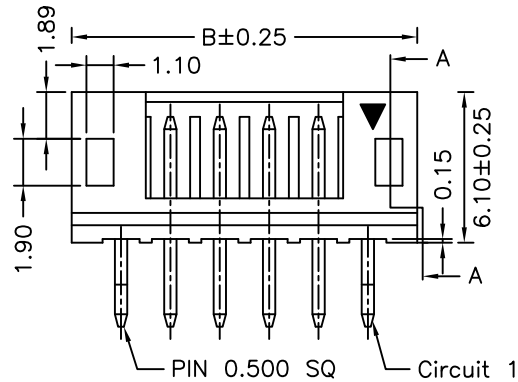

02:With pin kink (TYPE 1)  
(First pin & Last pin)

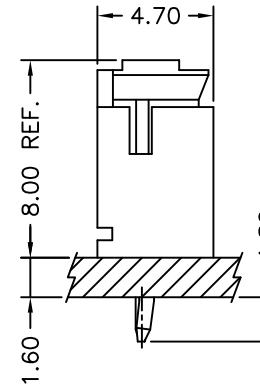

Circuit No.	Dimensions		
	A	B	C
02P	2.00	6.00	4.80
03P	4.00	8.00	6.80
04P	6.00	10.00	8.80
05P	8.00	12.00	10.80
06P	10.00	14.00	12.80
07P	12.00	16.00	14.80
08P	14.00	18.00	16.80
09P	16.00	20.00	18.80
10P	18.00	22.00	20.80
11P	20.00	24.00	22.80
12P	22.00	26.00	24.80
13P	24.00	28.00	26.80
14P	26.00	30.00	28.80
15P	28.00	32.00	30.80
16P	30.00	34.00	32.80
17P	32.00	36.00	34.80
18P	34.00	38.00	36.80

1. 2P-18P 都使用一樣材料
2. 產品可使用相同廠牌型號再生材20% MAX.
3. 不可使用紅磷材料之產品

No.	Material	QTY	Specification
1	Base	1	Glass filled polyester;UL94V-0 Black(LEPCO/NP213) White(NYTEX/MG8015N-V)
2	Contact	2~18	Bronze; Selective Tin-plated over Nickel

REV.	DESCRIPTION	DATE	NAME
A0	NEW RELEASE	2013. 12. 10	唐騰鳳

GENERAL TOLERANCE

X. X±0.25  
 X. XX±0.15  
 X. XXX±0.05

Singatron Enterprise Co., Ltd.

TITLE	2.00mm PITCH 180° WAFER		
DWN	唐騰鳳	PART NO.	2WBA2001WV-XPXXXXXXOX
CHKD	2013. 12. 10	SCALE 1:1	UNIT: mm
APVD	張子波	SIZE: A3	SHEET: 1 OF 1 REV: A0
<b>CUSTOMER COPY</b>			