
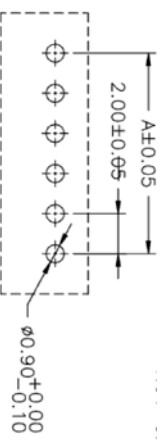
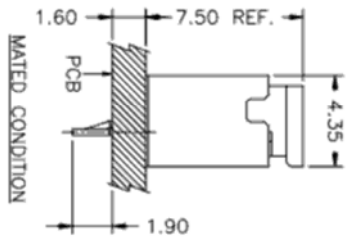
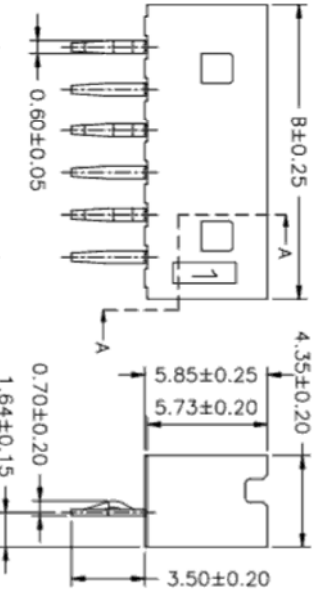
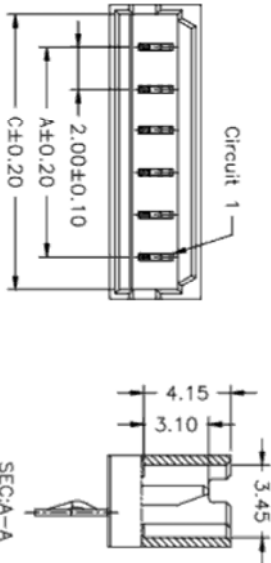


REV. ECN NO. OR DESCRIPTION	REVISED	DATE
A PDR RELEASE	Even	2019.07.12

P/N
2WBA2002 WY-XP XXX

① Series No.
② Connector type: WY=Vertical
③ No. of circuits
④ Option code:

Blank=Color:Beige(4585C), Tin-plated
WH=Color:Neutrul(White), Tin-plated
BK



Circuit No.	Dimensions		
	A	B	C
02P	2.00	6.00	5.10
03P	4.00	8.00	7.10
04P	6.00	10.00	9.10
05P	8.00	12.00	11.10
06P	10.00	14.00	13.10
07P	12.00	16.00	15.10
08P	14.00	18.00	17.10
09P	16.00	20.00	19.10
10P	18.00	22.00	21.10
11P	20.00	24.00	23.10
12P	22.00	26.00	25.10
13P	24.00	28.00	27.10
14P	26.00	30.00	29.10
15P	28.00	32.00	31.10

SPECIFICATIONS

Current Rating: 2A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Phosphor Bronze
Material: Nylon 66,UL94V-0

- SPECIFICATIONS:
- TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**
 - PACKAGE: SEE "2WBA2002WV-02P" PACKAGE.
 - OTHER GENERAL SPEC. TO REFER "2WBA2002WV-02P SPEC".

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信音企業股份有限公司				
DECIMALS:	ANGLES:	TITLE	200mm PITCH 180° WATER	
X. :±0.5	X :±2°	DWN	REV 2019.07.12 PART NO. 2WBA2002WV-02P	
XX :±0.25	XX :±1°	CHKD	SCALE:1/1	UNIT: mm
XXX :±0.15		APVD	ANSI Z39.50.12 SIZE: A3	SHEET:1 OF 1 REV:A
XXX :±0.05		CUSTOMER COPY		