


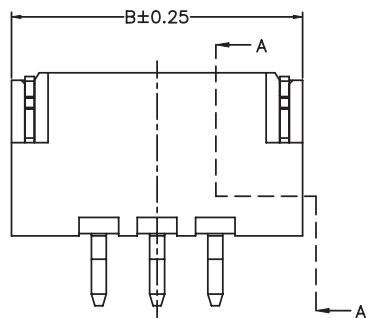


KAPTON TAPE
(FOR PICK AND PLACE SYSTEMS)

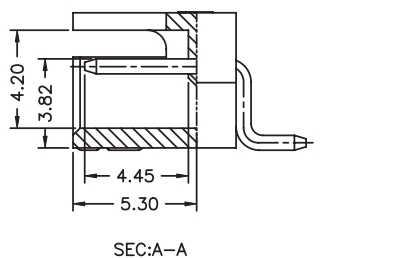

02P~03P

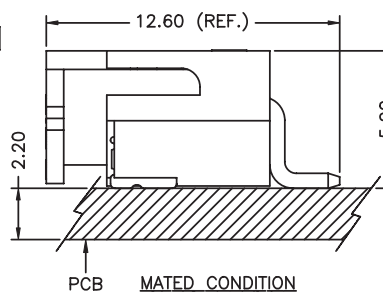

P/N LEGEND

2	WBA2501	WR-S	XP	N	1	B	T1	T	00	X
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪

① Series No.
② Connector type: WR=Right angle
③ Mounting type: S=SMT
④ No. of circuits
⑤ N=Halogen Free
⑥ Material: 1=Nylon 10T
⑦ Color: B=Nature(Black)
⑧ Plating code for contacts: T1=Tin-plated
⑨ Plating code for solder tabs:
T=Matte Tin-plated
⑩ Option code: 00=Standard
⑪ Packing code:
R=Tape & Reel(Without Cap or Mylar)
L=Tape & Reel(With Cap or Mylar)

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: $10\text{m}\Omega$ Max
Insulation Resistance: $1000\text{M}\Omega$ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass
Solder Tabs: Brass

Circuit No.	Dimensions			Circuit No.	Dimensions		
	A	B	C		A	B	C
02P	2.50	10.00	6.00	09P	20.00	27.50	23.50
03P	5.00	12.50	8.50	10P	22.50	30.00	26.00
04P	7.50	15.00	11.00	11P	25.00	32.50	28.50
05P	10.00	17.50	13.50	12P	27.50	35.00	31.00
06P	12.50	20.00	16.00	13P	30.00	37.50	33.50
07P	15.00	22.50	18.50	14P	32.50	40.00	36.00
08P	17.50	25.00	21.00	15P	35.00	42.50	38.50

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: X.X \pm 0.25
X.XX \pm 0.15
X.XXX \pm 0.05

ANGLES: X : $\pm 2^{\circ}$
X.X : $\pm 1^{\circ}$

Singatron Enterprise Co., Ltd.

TITLE	2.50mm PITCH 90° WAFER-SMT TYPE		
DWN	陳錦展 2012.03.19	PART NO. 2WBA2501WR-S-XPXXXXXXX	
CHKD		SCALE 1:1	UNIT: mm
APVD	陳錦展 2012.03.19	SIZE: A3	SHEET: 1 OF 1 REV: A0

CUSTOMER COPY

A0	NEW RELEASE	2012.03.19	陳錦展
REV.	DESCRIPTION	DATE	NAME