

#### P/N LEGEND

2WBC3030 HF-2XNP XXX			
①	②	③	④
① Series No.			
② Connector type: HF=Receptacle			
③ No. of circuits			
④ Option code: 00=Standard			
Blank = Nylon 66,UL94V-2 , Color: Black			
-NF = Nylon66,UL94V-2 NO FLAME			
Color: Natural(Beige)			
-V0 = Nylon 66,UL94V-0 , Color: Black			


#### SPECIFICATIONS

Current Rating: 5A AC,DC  
Voltage Rating: 250V AC,DC  
Temperature Range: -25°C ~ +85°C  
Contact Resistance: 10mΩ Max  
Insulation Resistance: 1000MΩ Min  
Withstanding Voltage: 1500V AC/minute

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
2X01P	---	3.80	2X07P	18.00	21.80
2X02P	3.00	6.80	2X08P	21.00	24.80
2X03P	6.00	9.80	2X09P	24.00	27.80
2X04P	9.00	12.80	2X10P	27.00	30.80
2X05P	12.00	15.80	2X11P	30.00	33.80
2X06P	15.00	18.80	2X12P	33.00	36.80


UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd.			
DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2		TITLE 3.00mm PITCH HOUSING-RECEPTACLE, MICRO-FIT			
ANGLES: X :±2° X.X :±1°		DWN 2001.02.01	PART NO. 2WBC3030HF-2XNP-XXX		
		CHKD	SCALE 1:1	UNIT: mm	REV: B5
		APVD 2001.02.01	SIZE: A3	SHEET:1 OF 2	
CUSTOMER COPY					

B5	EN1507130001	2015.07.31	郭木思
B4	ER1504170001	2015.05.15	黃振有
B3	ECN1101240020	2011.01.24	謝金發
B2	EN1105110124	2011.05.11	陳敏
REV.	DESCRIPTION	DATE	NAME

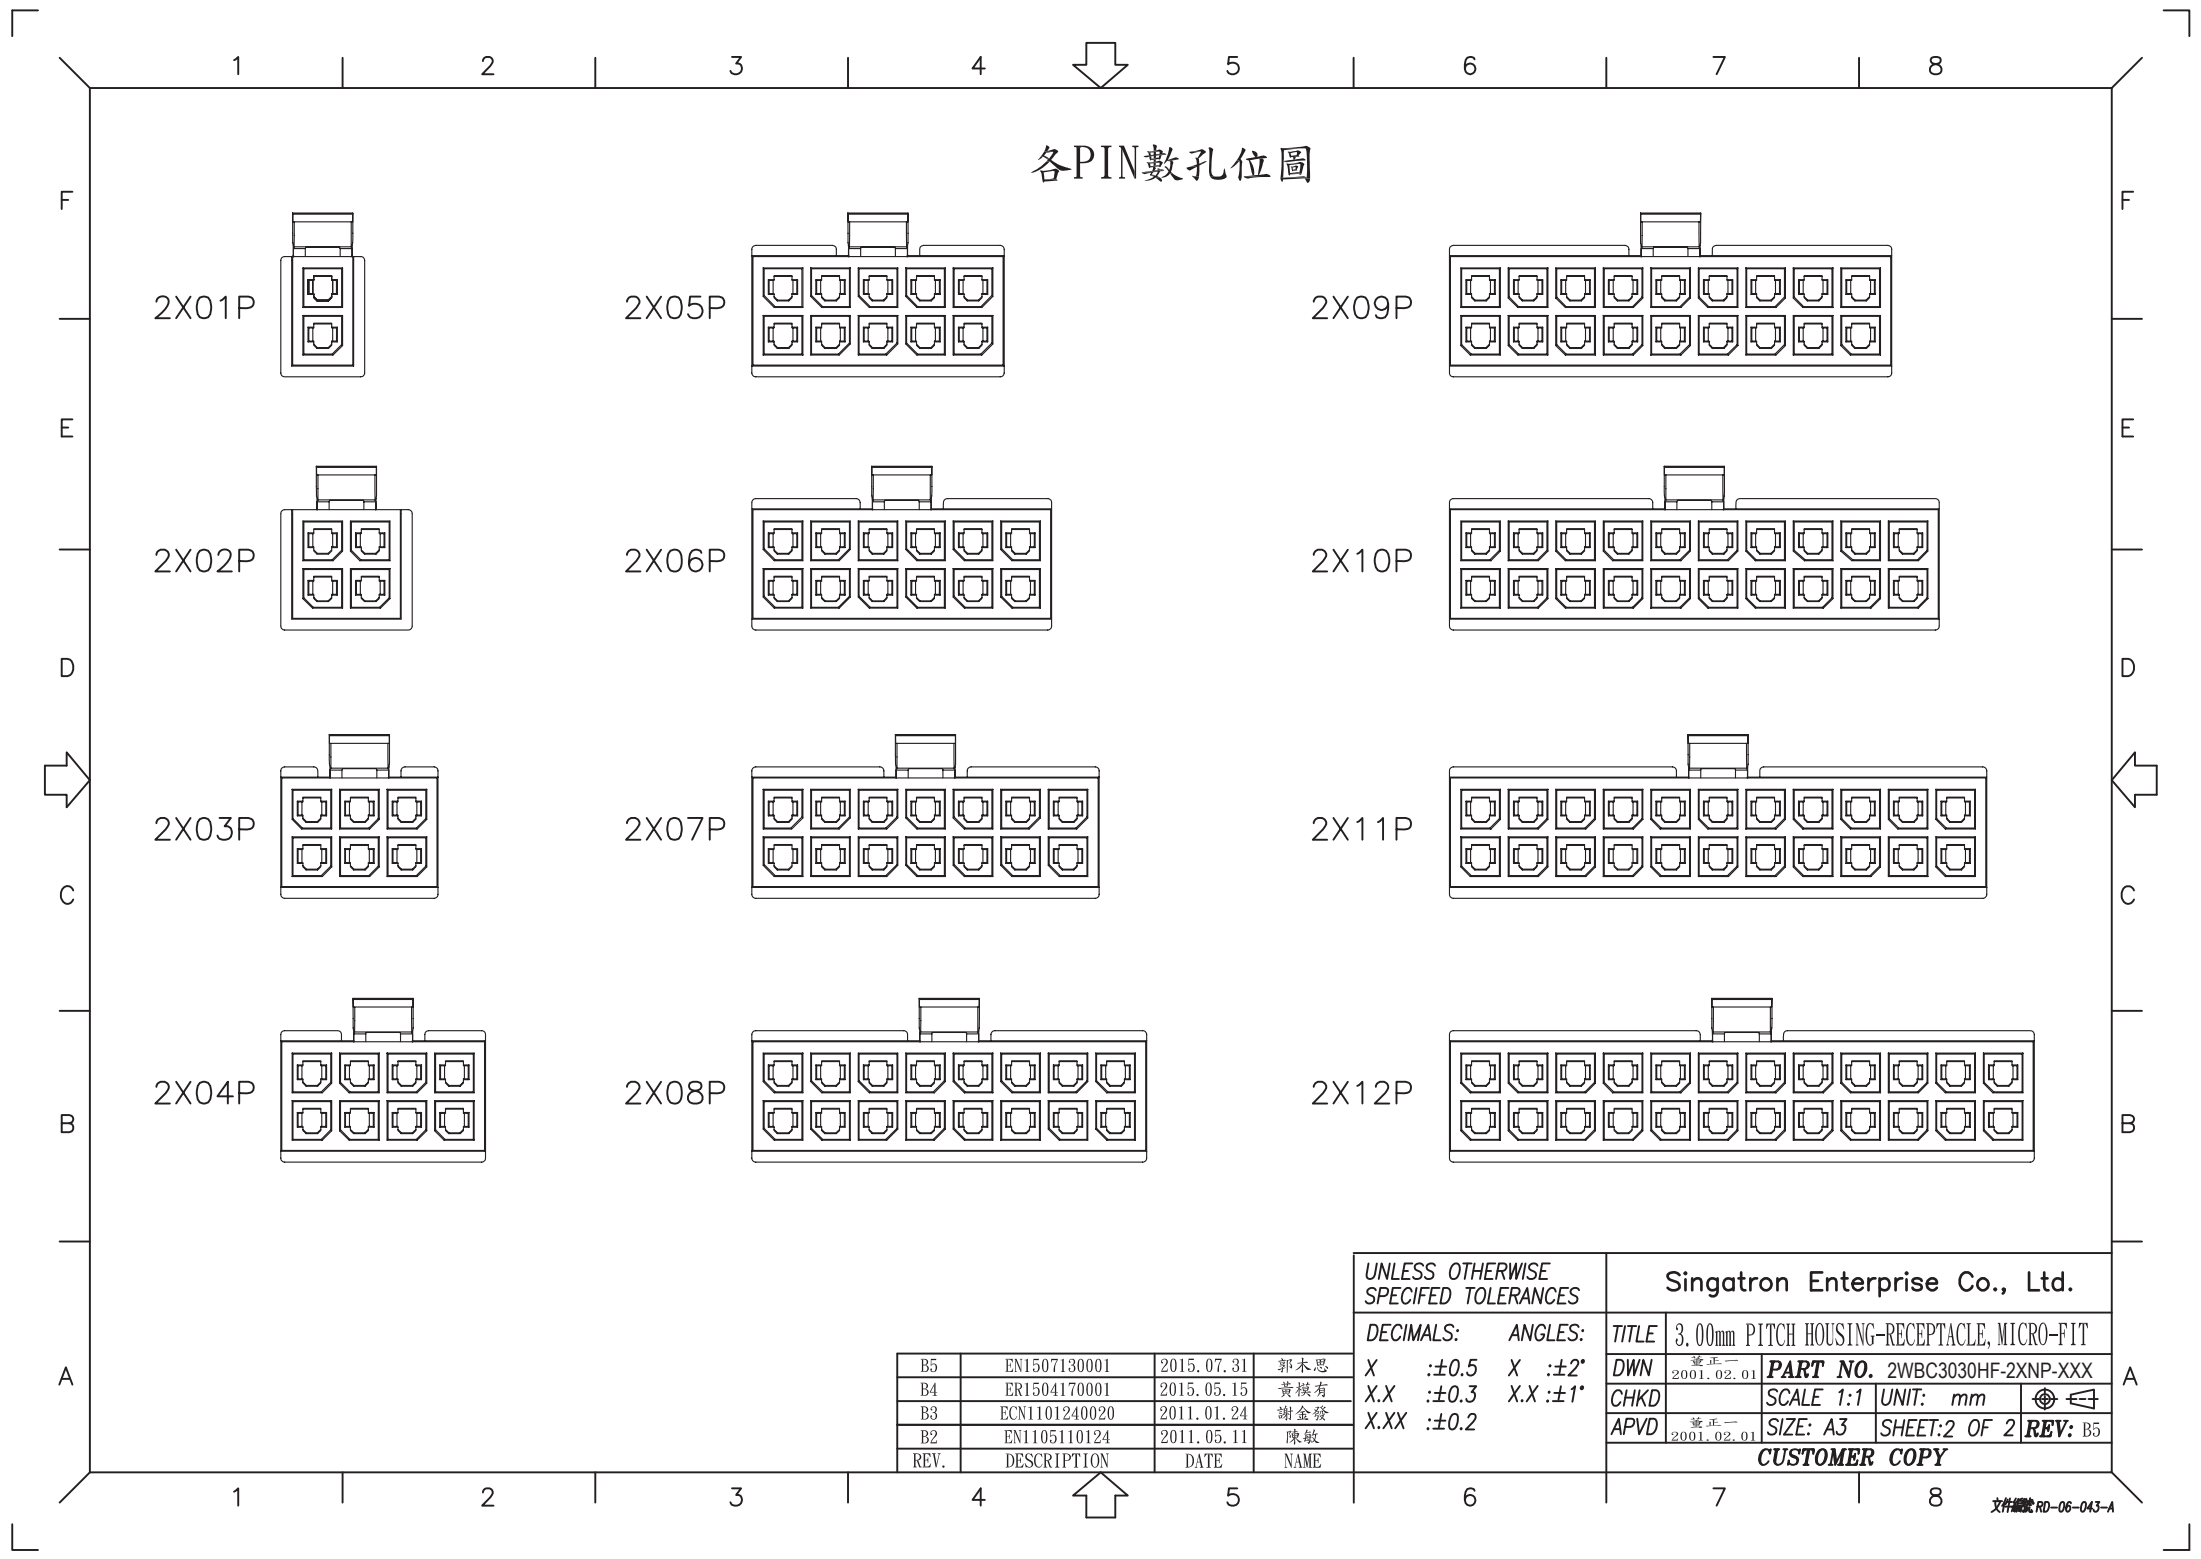

各PIN數孔位圖

B5	EN1507130001	2015.07.31	郭木思
B4	ER1504170001	2015.05.15	黃模有
B3	ECN1101240020	2011.01.24	謝金發
B2	EN1105110124	2011.05.11	陳敏
REV.	DESCRIPTION	DATE	NAME

UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd.				
DECIMALS:		ANGLES:		TITLE		
X :±0.5		X :±2°		3.00mm PITCH HOUSING-RECEPTACLE, MICRO-FIT		
X.X :±0.3		X.X :±1°		DWN 黃正一 2001.02.01		
X.XX :±0.2				PART NO. 2WBC3030HF-2XNP-XXX		
				CHKD		SCALE 1:1
				UNIT: mm		
				APVD 黃正一 2001.02.01		SIZE: A3
				SHEET:2 OF 2		REV: B5
				CUSTOMER COPY		