

1 2 3 4 5 6 7 8

F

F

E

E

D

D

C



C

B

B

A

A

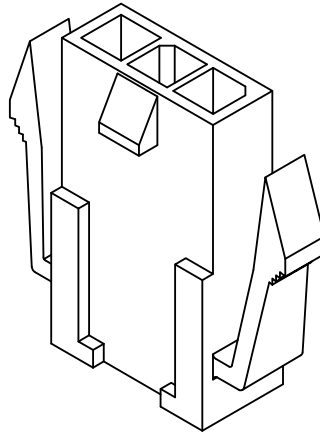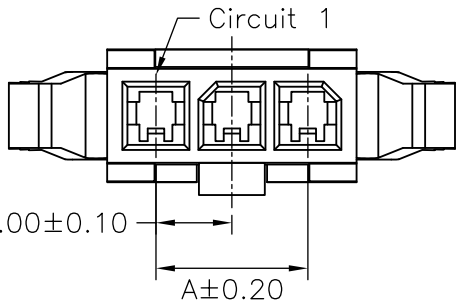


SPECIFICATIONS

Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2
 Color: Black

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
2WBC3030HM-02P	3.00	6.85
2WBC3030HM-03P	6.00	9.85
2WBC3030HM-04P	9.00	12.85
2WBC3030HM-05P	12.00	15.85
2WBC3030HM-06P	15.00	18.85
2WBC3030HM-07P	18.00	21.85
2WBC3030HM-08P	21.00	24.85
2WBC3030HM-09P	24.00	27.85
2WBC3030HM-10P	27.00	30.85
2WBC3030HM-11P	30.00	33.85
2WBC3030HM-12P	33.00	36.85

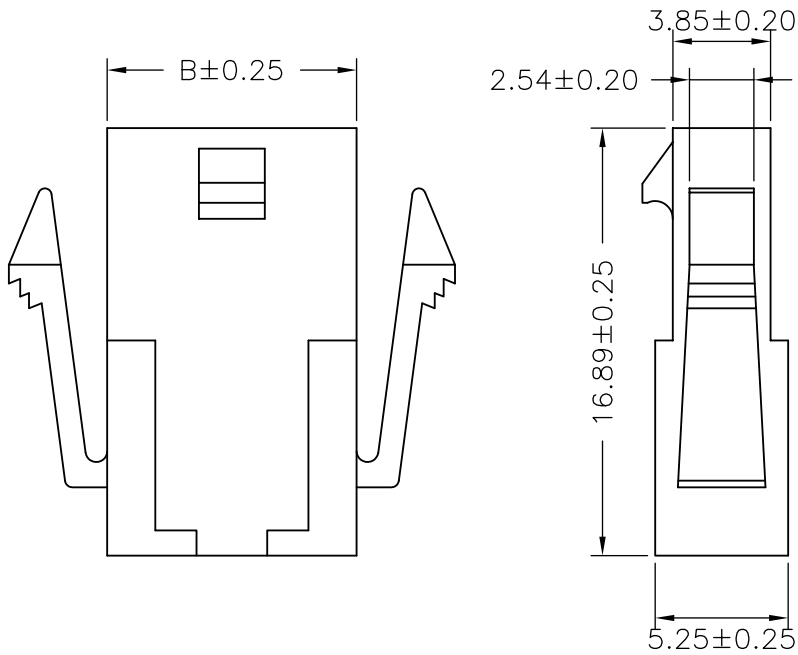

			GENERAL TOLERANCE	
B1	REVISE	2008.07.01	X. X±0.25	ANGLE±
B0	NEW RELEASE	2005.12.14	X. XX±0.15	
REV.	DESCRIPTION	DATE	X. XXX±0.05	

Singatron Enterprise Co., Ltd.				
TITLE	3.00mm PITCH HOUSING PLUG, SINGLE ROW MICRO-FIT			
DWN	董正一	PART NO.	2WBC3030HM-XP	
CHKD	2003.05.14	SCALE 1:1	UNIT: mm	☉ ↻
APVD	董正一	SIZE: A3	SHEET: 1 OF 1	REV: B1
CUSTOMER COPY				

1 2 3 4 5 6 7 8