
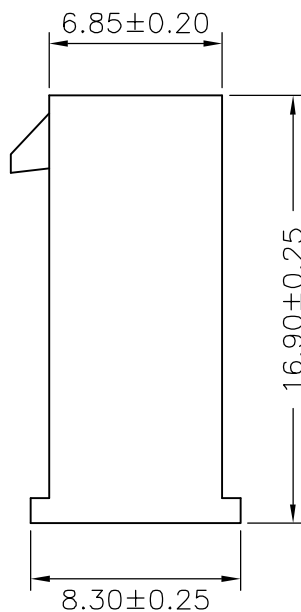


SPECIFICATIONS

Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Black

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
2WBC3030HMA-2X01P-V0	---	3.85
2WBC3030HMA-2X02P-V0	3.00	6.85
2WBC3030HMA-2X03P-V0	6.00	9.85
2WBC3030HMA-2X04P-V0	9.00	12.85
2WBC3030HMA-2X05P-V0	12.00	15.85
2WBC3030HMA-2X06P-V0	15.00	18.85
2WBC3030HMA-2X07P-V0	18.00	21.85
2WBC3030HMA-2X08P-V0	21.00	24.85
2WBC3030HMA-2X09P-V0	24.00	27.85
2WBC3030HMA-2X10P-V0	27.00	30.85
2WBC3030HMA-2X11P-V0	30.00	33.85
2WBC3030HMA-2X12P-V0	33.00	36.85

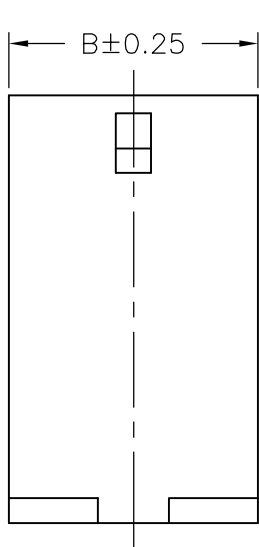

Singatron Enterprise Co., Ltd.				
TITLE	3.00mm PITCH HOUSING-PLUG, MICRO-FIT			
DWN	李勤	PART NO.	2WBC3030HMA-2XNP-V0	
CHKD	2005.12.14	SCALE	1:1	UNIT: mm
APVD	董正一	SIZE	A3	SHEET: 1 OF 1 REV: A1
CUSTOMER COPY				

REV.	DESCRIPTION	DATE	GENERAL TOLERANCE	ANGLE
A1	REVISE	2008.12.30	X.X ±0.25	
A0	NEW RELEASE	2005.12.14	X.XX ±0.15	
			X.XXX ±0.05	