
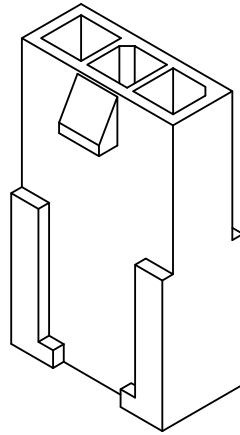


1 2 3 4 5 6 7 8

F
E
D
C
B
A

F
E
D
C
B
A





SPECIFICATIONS

Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2
 Color: Black

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
2WBC3030HMA-02P	3.00	6.85
2WBC3030HMA-03P	6.00	9.85
2WBC3030HMA-04P	9.00	12.85
2WBC3030HMA-05P	12.00	15.85
2WBC3030HMA-06P	15.00	18.85
2WBC3030HMA-07P	18.00	21.85
2WBC3030HMA-08P	21.00	24.85
2WBC3030HMA-09P	24.00	27.85
2WBC3030HMA-10P	27.00	30.85
2WBC3030HMA-11P	30.00	33.85
2WBC3030HMA-12P	33.00	36.85

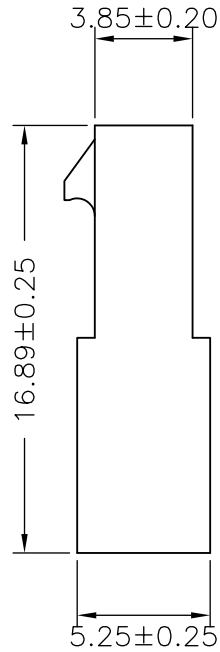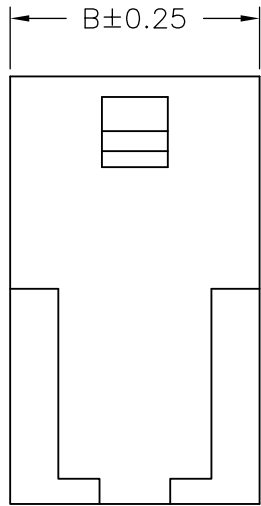

REV.	DESCRIPTION	DATE	GENERAL TOLERANCE	
B1	REVISE	2008.07.01	X. X±0.25	ANGLE±
B0	NEW RELEASE	2005.12.14	X. XX±0.15	
			X. XXX±0.05	

Singatron Enterprise Co., Ltd.				
TITLE	3.00mm PITCH HOUSING-PLUG SINGLE ROW, MICRO-FIT			
DWN	董正一	PART NO.	2WBC3030HMA-XP	
CHKD	2004.09.16	SCALE	1:1	UNIT: mm
APVD	董正一	SIZE:	A3	SHEET: 1 OF 1 REV: B1
CUSTOMER COPY				

1 2 3 4 5 6 7 8